choetech

Catalog

Wireless Power to the Future

choetech



Shenzhen DAK Technology Co.,Ltd

www.choetech.com

choetech

Wireless Charger





choetech **New Arrivals**

Qi 2 Choetech 3 in 1 15W Magnetic wireless charger station for iPhone 12/13/14/15 series



Product Parameters:

Model Name: T611-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: white
Material: zinc alloy+PC+ABS+Silica gel

choetech **New Arrivals**

Qi 2 Choetech 3 in 1 15W Magnetic wireless charger station for iPhone 12/13/14/15 series



Product Parameters:

Model Name: T585-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: white
Material: zinc alloy+PC+ABS+Silica gel
Product Size: 105* height 146mm

choetech **New Arrivals**

Qi2 2in1 Holder Magnetic Wireless Charger For iPhone 15 Series



Product Parameters:

Model	T575-F Qi2
Material	Aluminum alloy + PC
Interface	USB-C
Input	5V-15V/2A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)
Available Color	Space Grey / Silvery White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | 2in1 holder magnetic wireless charger | Adjustable magnetic charger



choetech **Best Seller**

15W 4-in-1 Wireless Charger stand for Apple watch and Samsung watch



Product Parameters:

Model	T608-F
Coil	2 coils
Material	ABS+PC+silicone
Interface	USB-C
Input	5V/2A; 9V/3A(Max)
Mobile Output	15W (Max)
watch output	2.5W
Airpods output	3W
Net Weight	1900g
Available Color	White, black
Certifications	ETL, RCM, FCC, CE, RoHS, PSE
Accessories	Wireless charger stand+ bag + manual+ CC cable

15W output | charging for Iwatch and samsung watch | stand design



choetech **Best Seller**

Choetech 3 in 1 magnetic wireless charger for iWatch iPhone Airpods



Product Parameters:

Model T616-F
Color: black, white
Input current: 5V/2A 9V/2A 12V/1.67A
Mobile phone wireless output: 10W/7.5W/5W
Headphone output: 5W
Watch output: 2.5W
Material: ABS+rubber oil
Wireless sensing distance: 2-8mm
Charging cable length: 1m
Device charging at the same time: 9V/12V/1.2-1.6A/12-15W
Maximum power: 22W
Adapter power: less than 9V can not be charged at the same time and does not support fast charging
Adapter power: suitable for 9V/12V

15W Max | 3 in 1 magnetic holder | magnetic charging for Iphone12,13,14,15 series

choetech **Best Seller**

3 in 1 magnetic wireless charger for watch iphone airpods charger holder



Product Parameters:

Model T618-F
Color: black, white
Input current: 5V/2A 9V/2A 12V/1.67A
Mobile phone wireless output: 10W/7.5W/5W
Headphone output: 5W
Watch output: 2.5W
Material: ABS+rubber oil
Wireless sensing distance: 2-8mm
Charging cable length: 1m
Device charging at the same time: 9V/12V/1.2-1.6A/12-15W
Maximum power: 22W
Adapter power: less than 9V can not be charged at the same time and does not support fast charging
Adapter power: suitable for 9V/12V

15W Max | 3 in 1 magnetic holder | magnetic charging for Iphone12,13,14 series

choetech **Best Seller**

3 in 1 magnetic wireless charger for watch charger holder





Product Parameters:

Model T600-F
Interface Type-C
Input 5V-9V/2.2A (Max)
Output Mobile phone 15W (Max) + TWS headset 5W (Max) + Watch (Max) 5W. Total power: 15W(Max)

15W Max | 3 in 1 magnetic holder | magnetic charging for Iphone12,13,14 series

choetech **New Arrival**

3 in 1 magnetic wireless charger for watch charger holder



Product Parameters:

Model T632-F
Interface Type-C
Input 5V-9V/2.2A (Max)
Output Mobile phone 15W (Max) + Apple watch 3W (Max) + Watch (Max) 2.5W.
Total power: 15W(Max)
Color: Black
Certification: CE, FCC, ROHS

Distachable Apple watch charger | 3 in 1 magnetic holder | Fashion appearence

choetech **New Arrival**

Round Bicycle Finder & Reflector 2-in-1



Product Parameters:

Model T300
Round Bicycle Finder & Reflector 2-in-1
★ 5.2 Bluetooth
★ Find My network compatibility
★ 2-in-1 design: bicycle finder & reflector
★ ISO6742-certified reflector
★ IP67 waterproof
★ User-replaceable battery for extended usage
★ Easy attachment to the bicycle's seat post

Small size | 2 IN 1 wireless charger | MFi ceritificate

choetech **New Arrival**

Round Bicycle Finder & Reflector 2-in-1



Product Parameters:

Model T301
Round Bicycle Finder & Reflector 2-in-1
★ 5.2 Bluetooth
★ Find My network compatibility
★ 2-in-1 design: bicycle finder & reflector
★ ISO6742-certified reflector
★ IP67 waterproof
★ User-replaceable battery for extended usage
★ Easy attachment to the bicycle's seat post

Small size | 2 IN 1 wireless charger | MFi ceritificate

choetech **New Arrival**

Bicycle Bell & Built-in Finder 2-in-1



Product Parameters:

Model T302

★ 2-in-1 design: bicycle bell & finder
★ V5.2 Bluetooth
★ Find My network compatibility
★ ISO14878 certified bell
★ IPX7 waterproof rating
★ Compatible with various bicycle types
★ User-replaceable battery for extended usage
★ Easy attachment to the bicycle's seat post

Small size | Adjustable holder size | 2-in-1 design

choetech New Arrival

Bicycle Bell with Housing for Standard Finder



Product Parameters:

Model T304

Bicycle Bell with Housing for Standard Finder

★ Constructed from high-quality brass
★ ISO14878 certified bell
★ Equipped with a waterproof ring
★ Hidden design for finder placement
★ Compatible with various bicycle types
★ Easy to install

Small size | Adjustable holder size | 2-in-1 design

choetech **New Arrival**

Ripple Tag





Product Parameters:

Model T305

Ripple Tag (Lenze Solution)

★ BLE 5.2 Bluetooth System with 32-bit processor
★ Compatible with the Apple Find My network
★ Battery user-replacable
★ Use the iOS's Find My app directly, no need to install another App
★ Built-in a Buzzer for play sound
★ Small and light for easy carry

Small size | Bluetooth connect | MFI certified

choetech

2 in 1 Magsafe&MFI Wireless Charger

Made for iPhone | iPad | iPod

Made for MagSafe



Product Parameters:

Model	T323
Material	ABS+PU
Interface	USB-C
Input	5V-2A, 9V-2A
Output	Apple Watch 5W (max) + iPhone 15W (max)
Foldable Size	94*88*23mm
Available Color	White
Certifications	MFI&MFM CE, RoHS



Foldable | 2 IN 1 wireless charger | MFi&MFM ceritificate

choetech

3 in 1 Magsafe&MFI Wireless Charger

Made for iPhone | iPad | iPod

Made for MagSafe



Product Parameters:

Model	T324
Material	ABS+PU
Interface	USB-C
Input	12V/3A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)，Apple watch 3W, total 25W
Dimension	154*192*16.6mm
Available Color	可定制
Certifications	FCC，CE, RoHS，MFI, MFM



Foldable | 3 IN 1 wireless charger | **MFi&MFM** ceritificate

choetech

2 in 1 15W MFI portable Wireless Charger

Made for Apple Watch



Product Parameters:

Model	T327
Material	ABS+PU
Interface	USB-C
Input	5V-3A, 9V-3A
Output	Apple Watch 3W (max) + mobile 15W (max)
Foldable Size	94*88*23mm
Available Color	light blue+white
Certifications	MFI, CE, RoHS,FCC

Foldable | 2 IN 1 wireless charger | MFi ceritificate



choetech

3 in 1 MFI Wireless Charger




Made for Apple Watch

Product Parameters:

Model	T328
Material	ABS+PU
Interface	USB-C
Input	12V/3A (Max)
Output	Airpods 5W (Max) + mobilephone 15W (Max)，Apple watch 3W
Dimension	154*192*16.6mm
Available Color:	light green
Certifications	FCC，CE, RoHS，MFI

Foldable | 3 IN 1 wireless charger | **MFi** ceritificate

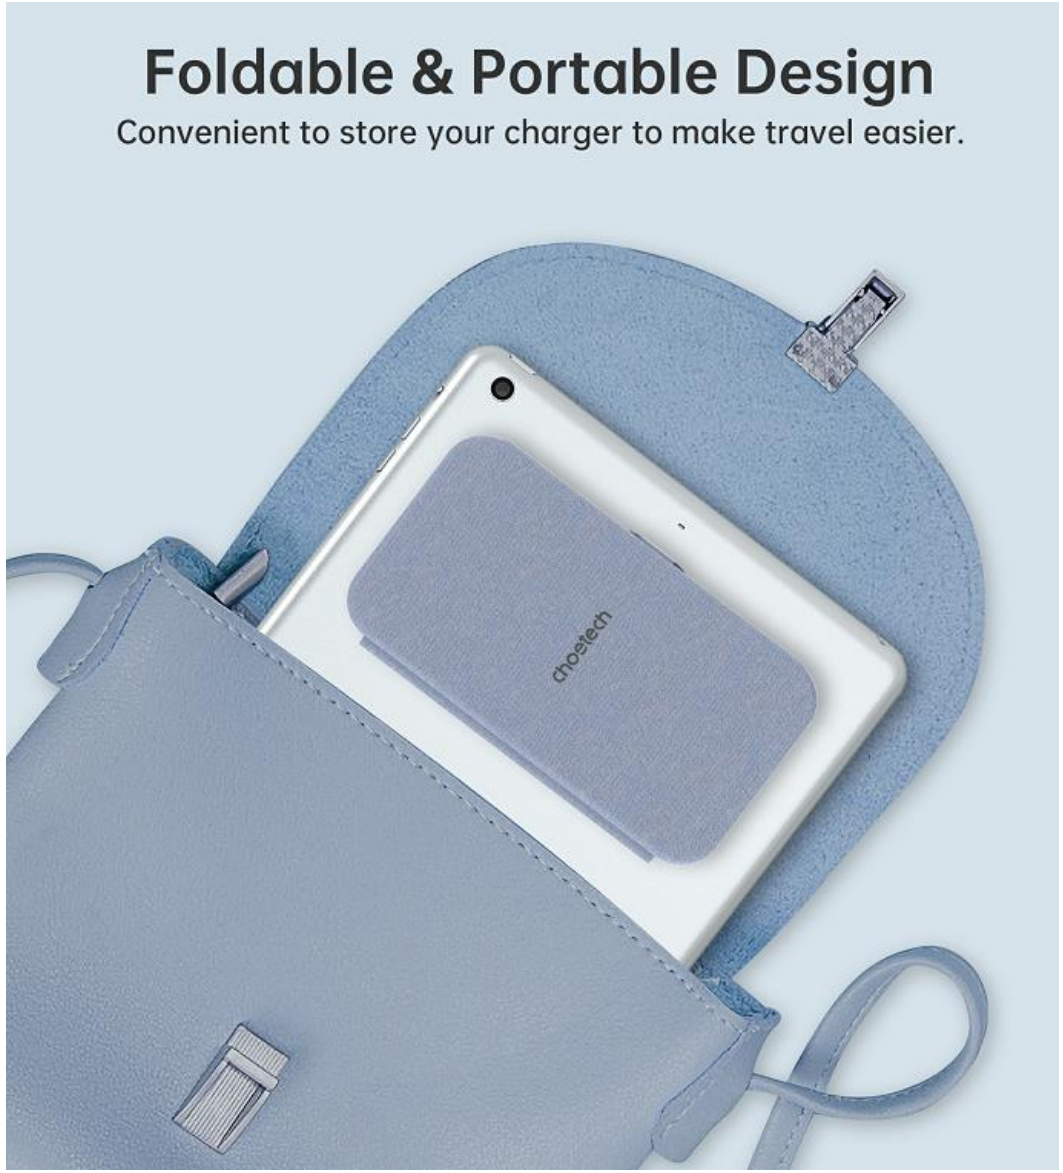

choetech

Anti-Loss Bluetooth Tag

Bluetooth®

- **Apple Find My**
- **Card Type**





Product Parameters:

Model	T326
battery capacity: 3V/400mAh	
App: Findmy	
Bluetooth range: 20meters	
BLE 5.2 Bluetooth System	
Material	PC+纤
Dimension	85.8*53.6*2.5 mm
Available Color	可定制
Certifications	FCC，CE, RoHS

bluetooth | original mould | Card type

choetech

10000mAh MFM&MFI 2in1 Power Bank

Made for iPhone | iPad | iPod

Made for MagSafe





Product Parameters:

Model	B665
Interface	1xUSB-C
Capacity	10000mAh
Battery Type	1 x lithium polymer battery
Input	USB-C : 5V-3A, 9V-2A,(18w Max)
Output	USB-C : 5V-1A,5V2.1A,9V1.1A, 9V-2A (18w Max
Magsafe Output:	5W/7.5W/15W (MFM)
Apple Watch:	5W Max
Material	ABS + PC, V0 Anti-fire
Color	White，gray
Certifications	CE, FCC, ROHS, MFM, MFI

10000 mah capacity | MFM certificated | mfi certificated

choetech

choetech 10000mAh MFM Power Bank

Made for MagSafe





Product Parameters:

Model	B666
Interface	1xUSB-C
Capacity	10000mAh
Battery Type	1 x lithium polymer battery
Input	USB-C : 5V-3A, 9V-2A,(18w Max)
Output	USB-C : 5V-1A,5V2.1A,9V1.1A, 9V-2A (18w Max
Magsafe Output:	5W/7.5W/15W （MFM）
QI Output:	5W Max
Material	ABS + PC, V0 Anti-fire
Color	White，gray
Certifications	CE, FCC, ROHS, MFM

10000 mah capacity | 18w max output, fast charging | MFM certificated

choetech

choetech 10000mAh MFI Power Bank

Made for
iPhone | iPad | iPod





Product Parameters:

Model	B667
Interface	1xUSB-C
Capacity	10000mAh
Battery Type	1 x lithium polymer battery
Input	USB-C : 5V-3A, 9V-2A,(18w Max)
Output	USB-C : 5V-1A,5V2.1A,9V1.1A, 9V-2A (18w Max
Magsafe Output:	5W/7.5W/15W （MFM）
Apple Watch:	5W Max
Material	ABS + PC, V0 Anti-fire
Color	White，gray
Certifications	CE, FCC, ROHS, MFi

10000 mah capacity | 18w max output, fast charging | MFi certificated

choetech

MFI Portable Quick Charger for Apple Watch

Made for iPhone | iPad | iPod

Foldable



Product Parameters:

Model	T325
Interface	1xUSB-C
Input	USB-C : 5V-1A
Apple Watch:	5W Max
Material	ABS + PC, V0 Anti-fire
Color	White，gray
eCertifications	CE, FCC, ROHS, MFi

5w max output, fast charging | MFi certificated |

choetech

5 in1 Magnetic Wireless Charger

- **Magnetic charger**
- **Digita clock**
- **Night Light**



Product Parameters:

Model	T604
Material	ABC+ PC
Interface	USB-C,USB-A
Input	9V3A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)
USB-A	5V2A
Available Color	gray,white
Certifications	FCC, CE, RoHS

5 in1 | Magnetic charging | LDE&clock

choetech

3 in 1 Holder Magnetic Wireless Charger for Iphone 12,13,14,15 series







Product Parameters:

Model	T597-F
Material	Aluminum alloy + PC
Interface	USB-C*2， usb-A
Input	5V-9V/3A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max), USB-A, Type-c for watch
Available Color	white, black
Certifications	ETL, RCM, FCC, CE, RoHS，PSE

15W output | 3 in 1 holder magnetic wireless charger | the holder for Apple watch charger

choetech

3 in 1 Magnetic Wireless Charger for Iphone 12, 13, 14, 15 series and Apple watch

Made for MagSafe

Made for iPhone





Product Parameters:

Model	T589-F-MFM
Material	Aluminum alloy + PC+Silicone
Interface	DC port
Input	12V/3A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)，Apple watch 5W, total 25W
Dimension	174mm*104mm*158mm
Available Color	Space Grey +whte
Certifications	ETL, RCM, FCC, CE, RoHS，PSE

3-in-1 charging | MFM original mould | MFI certified

choetech

MFi 4-in-1 36W Multifunction Wireless Charging Dock



Product Parameters:

Model	T316
Material	ABS + aluminium-alloy
Interface	USB-A, DC, Lightning
Input	DC 12V/3A
Output	5V/1A (USB); 10W (Wireless Charging); 5W (for Apple Watch); 5V/2.1A (Lightning)
Product Size	180*85*82mm
Available Color	Silvery + black
Certifications	MFi, CE, RoHS, FCC, PSE

4 in 1 wireless charger | 30W max | MFi certificates



choetech **Best Seller**


MFM 2in1 Holder Magnetic Wireless Charger For iPhone 12/13/14/15 Series



Product Parameters:

Model	T575-F
Material	Aluminum alloy + PC
Interface	USB-C
Input	5V-15V/2A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)
Available Color	Space Grey / Silvery White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | 2in1 holder magnetic wireless charger | Adjustable magnetic charger

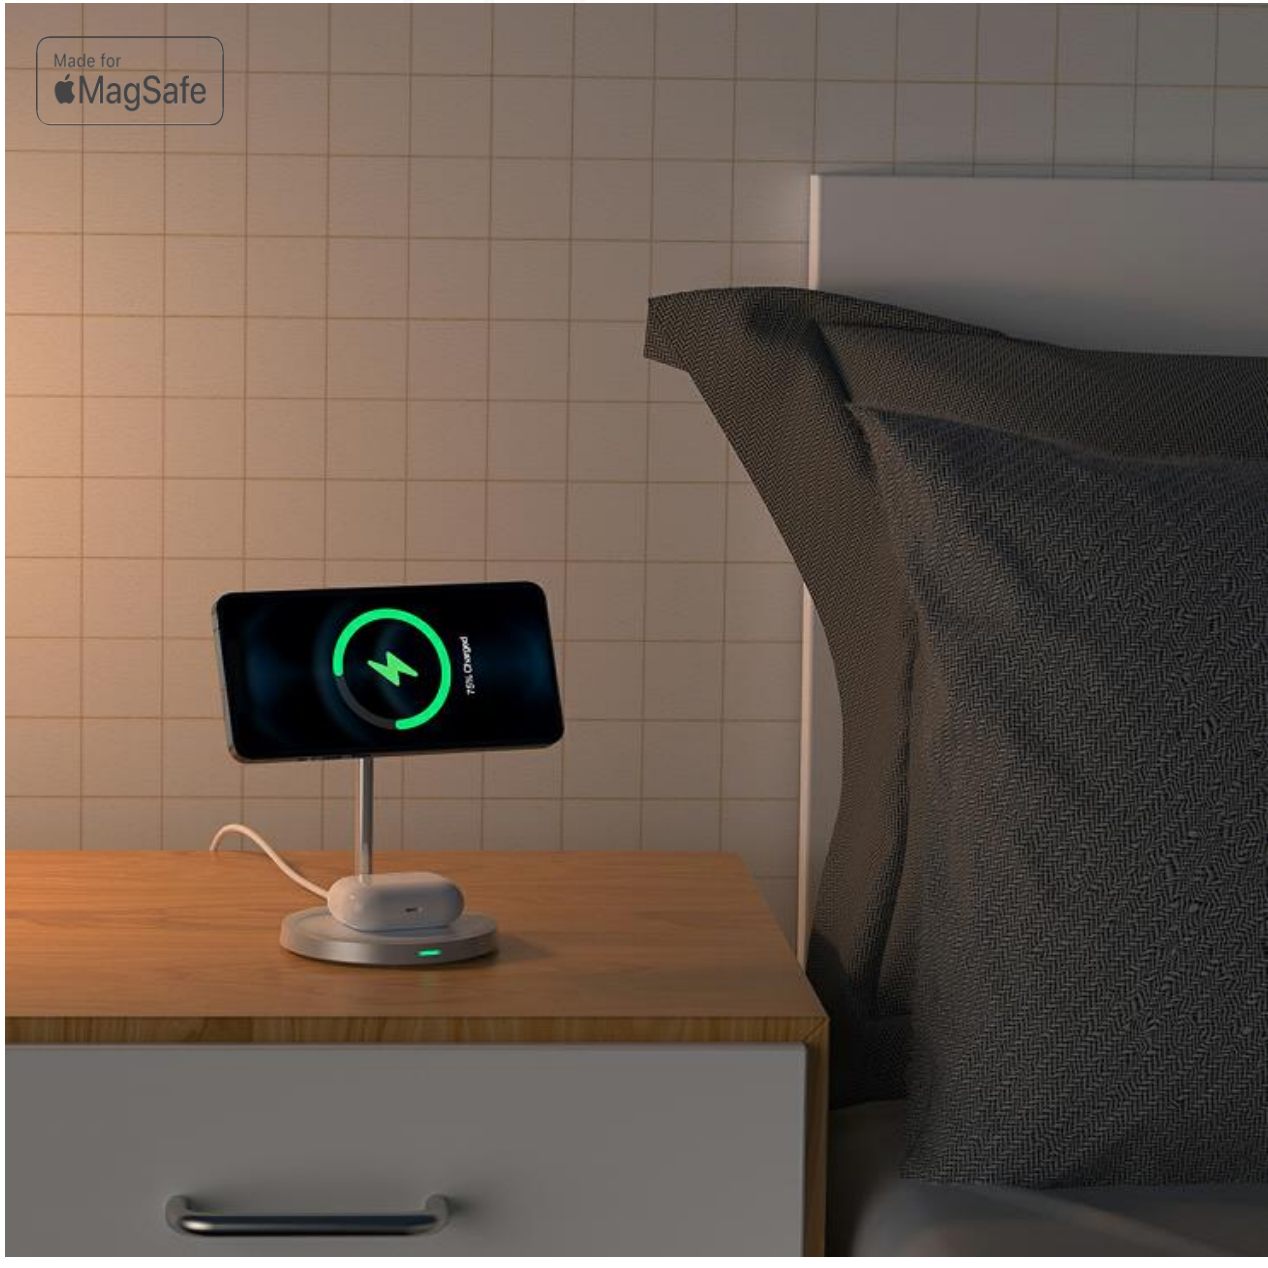

choetech **Best Seller**

4 in 1 Holder Magnetic Wireless Charger for Iphone 12,13,14/15 series



Product Parameters:

Model	T583-F
Material	Aluminum alloy + PC
Interface	USB-C
Input	5V-9V/2A (Max)
Output1	Airpods 2.5W (Max)
Output 2	iPhone 10W (Max)
Output 3	Apple watch 2w(max)
Output 4	Stylus pen 0.5w(max)
Available Color	black
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

Magnetic charging for Iphone 12,13 series | 4 in 1 holder magnetic wireless charger | mobile+watch+airpods +stylus pen charging



choetech **Best Seller**

Choetech 3in1 Magnetic wireless charger station for iPhone 12/13/14/15 series,AirPods Pro and iwatch holder



Product Parameters:

Model Name: T586-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max)
Color: white
Material: zinc alloy+PC+ABS+Silica gel
Product Size: 105* height 146mm

3in1 Wireless Charger | iWatch holder | 15W Max



choetech **Best Seller**

2 in 1 Holder Magnetic Wireless Charger for Iphone 12,13,14/15 series



Product Parameters:

Model	T581-F-102
Material	Aluminum alloy + PC
Interface	USB-C
Input	5V-9V/3A (Max)
Output	Airpods 5W (Max) + iPhone 15W (Max)
Available Color	white
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | 2 in 1 holder magnetic wireless charger | Magnetic charging for Iphone 12,13 series



choetech **Best Seller**

Choetech 3in1 Magnetic wireless charger station for iPhone 12/13/14/15 series,AirPods Pro and iWatch charger



Product Parameters:

Model Name: T585-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: white
Material: zinc alloy+PC+ABS+Silica gel
Product Size: 105* height 146mm




choetech **Best Seller**

Choetech 3in1 Magnetic wireless charger station for iPhone 12/13/14/15 series,AirPods Pro and iWatch charger



Product Parameters:

Model Name: T585-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: Black
Material: zinc alloy+PC+ABS+Silica gel
Product Size: 105* height 146mm

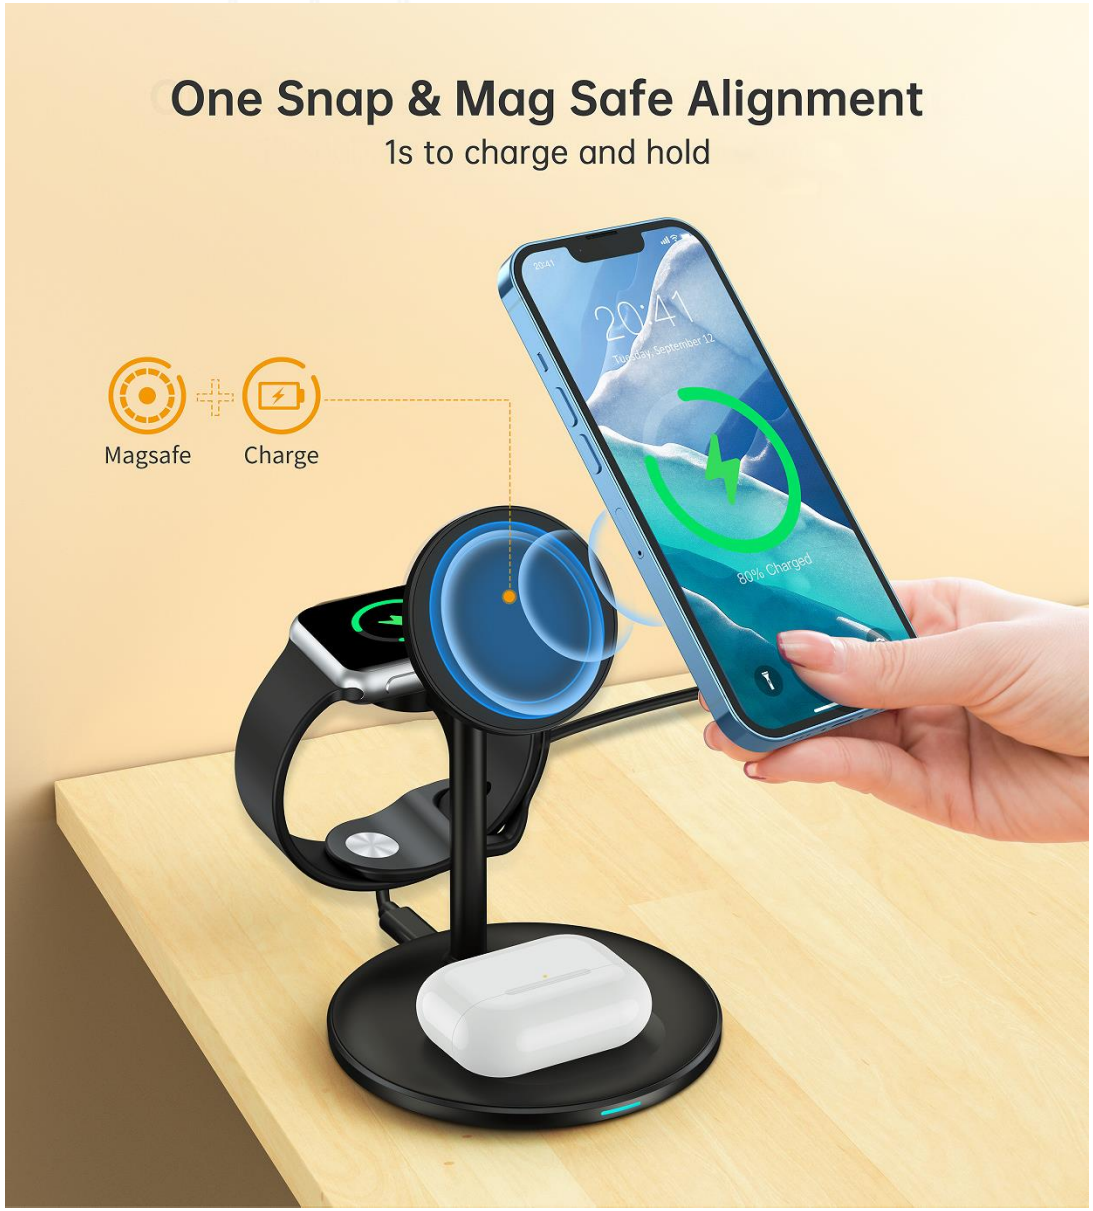

choetech

Choetech 3in1 Magnetic wireless charger station for iPhone 12/13/14/15 series,AirPods Pro and iwatch charger







Product Parameters:

Model Name: T587-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: White, Black
Material: zinc alloy+PC+ABS+Silica gel
Product Size: 105* height 146mm

choetech

15W 3-in-1 Magnetic Wireless Charger



Product Parameters:

Model	T602-F
Coil	Single coil
Material	Aluminium alloy+PC
Interface	USB-C cable, 1M
Input	5-12V/2A(Max)
Mobile Output	15W (Max)
Applewatch output	3W
Net Weight	150g
Available Color	White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | charging for mobile and Apple watch sync | stand design

choetech

15W 3-in-1 Magnetic Wireless Charger





Product Parameters:

Model	T603-F
Coil	Single coil
Material	Aluminium alloy+PC
Interface	USB-C cable, 1M
Input	5-12V/2A(Max)
Mobile Output	15W (Max)
Applewatch output	3W
Net Weight	150g
Available Color	White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | charging for mobile and Iwatch | stand design

choetech **New Arrivals**

Qi 2 Choetech 15W Magnetic wireless charger station for iPhone 12/13/14/15 series with Holder



Product Parameters:

Model Name: T519-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max)
Color: Black
Material: ABS

15W output | charging for mobile | stand design

choetech **Best Seller**

Choetech 3 in1 Foldable Magnetic wireless charger station for iPhone 12/13/14/15 series,AirPods Pro and iWatch charger





Product Parameters:

Model Name: T588-F
Interface: Type-C
Input: 5V-9V/3A (Max)
Output: 15W for iphone (Max) + TWS headset 5W (Max) +iwatch 5W（max） 15W max
Color: White
Material: PU

15W output | 3 in1 magnetic wireless charger | For iPhone12/13/14 series

choetech

2in1 Holder Magnetic Wireless Charger for iPhone12/13 Series





Product Parameters:

Model	T581-F
Material	PC+ABS+ aluminium alloy
Interface	Typc C
Input	5v-9v /3A (MAX)
Output	15W MAX for iPhone 12/13,/5w max for TWS);
Product Size	105mm diameter*height146mm
Available Color	Siilver/ Black

Certification: FCC, CE, ROHS, PSE, RCM, UKCA, UKNI

15W output | 2in1 holder magnetic wireless charger | For iPhone12/13 series

choetech **Best Seller**

15W Removable Wireless Magenetic Charger for iPhone12/13/14/15 series





Product Parameters:

Model	T518-F
Interface	C port with cable
Input	5V-12V/2A(Max)
Output	15W(Max)
Color	Multi colors choice, white, blue, golden, pink
Material	Aluminum alloy + silicone
Size	56*5.5mm (magsafe size)
Net Weight	90g

15w magnetic charging | PCBA in Cable design | Multi colors chosen

choetech

15W Removable Wireless Magenetic Holder Charger for iPhone12/13/14 series



Product Parameters:

Model	H047
Interface	C port with cable
Input	5V-12V/2A(Max)
Output	15W(Max)
Color	silver white
Material	Aluminum alloy + silicone
Size	129.4*75.7*74.6mm
Net Weight	110g

Aluminium-alloy material | The holder for Choetech T517-F | Silicone antislip



choetech

2in1 10W&15W Phone Mount & Fast Wireless Charger



Product Parameters:

Model	T548-S & T584-S
Material	ABS chuck, PC, silica gel, electrical components, aluminum alloy support rod, PVC, PU leather
Interface	USB-A
Input	5V/2A, 9V/1.8A
Output	10W & 15W (Max)
Compatible Phone Size	4.7-7"
Available Color	White
Certifications	CE, RoHS, FCC, ETL, RCM

2in1 phone&holder wireless charger | 360 degree rotation | 10W max



choetech

10W Fast Wireless Charging Stand



Product Parameters:

Model	T555-S & T555-F
Material	Anti-fire ABS
Interface	Typc-C
Input	5V-12V/2A
Output	10W & 15W (Compatible with 10W/7.5W/5W)
Product Size	118*82*76mm
Available Color	Black/Blue/Yellow
Certifications	CE, RoHS, FCC, ETL, RCM

10W&15W output | Stand wireless charger (holder+charging) | Two coils



choetech


15W Fast Wireless Charging Stand



Product Parameters:

Model Name: T524-S
Material: Anti-fire ABS+PC
Interface Input : Typc c
Output: 5V-12V/2A 10W & 15W (Compatible with 10W/7.5W/5W)75.5×82×121mm \
Available Color: Black

10W & 15W output | Support Multiple Fast Charge Protocols | Qi certificates

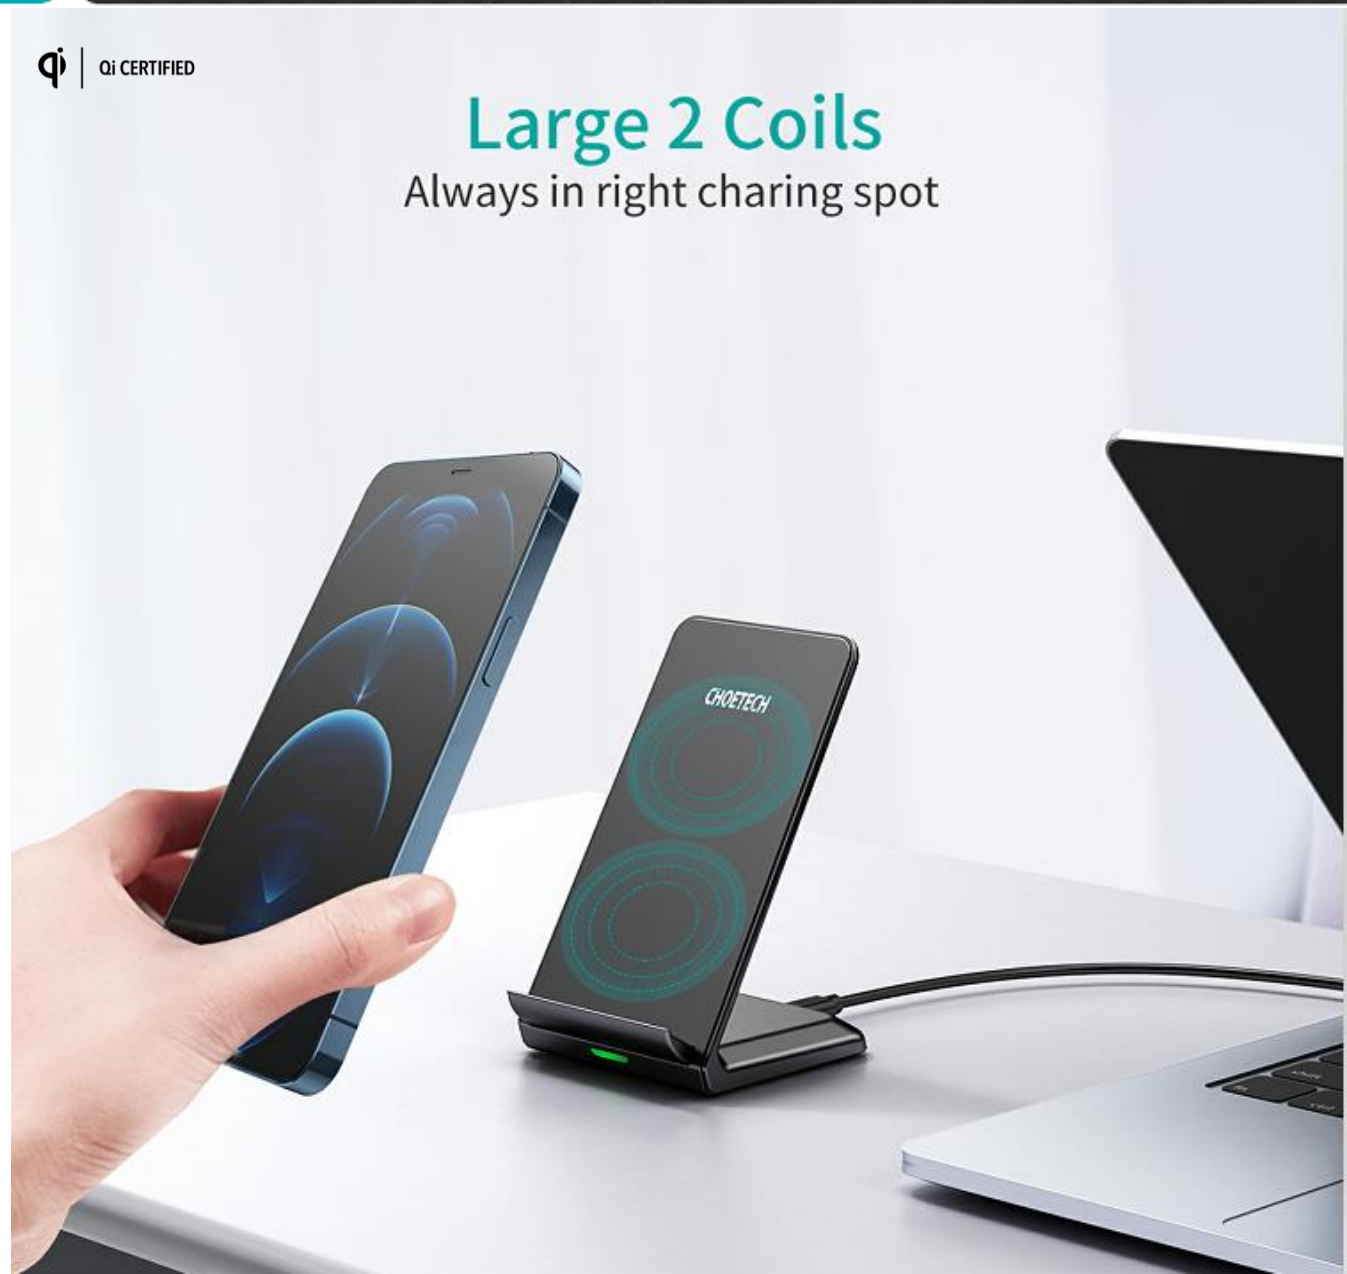

choetech

Choetech 10W Invisible 30mm Desktop Wireless Charging



Product Parameters:

Model name: T590-F
Input voltage range: 7.5-13.1Vdc (type C)
Rated input voltage: 12Vdc
Working distance: 13mm-30mm
Standby loss: <0.5W
Rated input current: 0.73A@30mm 5W (fixture)
Input efficiency: >65% @30mm 5W (fixture) >75% @20mm 10W (fixture)
Working frequency: 12OkHz-175kHz
Input current protection value (not in power transmission mode): 0.5Adc
Input current protection value (has entered power transmission mode): 1.7Adc
Coil voltage protection value (has entered the power transmission mode): 250V (peak value)
Working temperature protection value: 85℃
Input undervoltage value: 7.5V

Remote wireless charger | 10W Max | Simple tech lifestyle



choetech

MFi Magnetic Iwatch Charging Cable



Product Parameters:

Model	T319
Material	ABS + braid cable
Interface	Type-c
Input	5V/1A (Max)
Output	5W (Max)
Cable Length	100mm/3.3ft
Available Color	Black
Certifications	MFi, CE, FCC & RoHS

Made for
Apple Watch

Designed for iwatch | 1m length | MFi certificates



choetech

15W 2 in 1 Fast Wireless Charger with Stand for Apple Watch



Product Parameters:

Model	T317
Material	Zinc Alloy; Anti-fire PC; TPE
Interface	USB-C
Input	5V-2A, 9V-2A
Output	Apple Watch 5W (max) + iPhone 10W (max)
Product Size	180*92*12.5mm
Available Color	White
Certifications	MFI, QI, FCC, CE, RoHS

15W output | 2 IN 1 wireless charger | MFi&Qi ceritificate



choetech


30W 3in1 Magnetic Fast Wireless Charger Pad For iPhone 12/13/14 Series



Product Parameters:

Model	T569-S
Material	ABS + PC + Silicone + PU + Metal Weighted Base
Interface	USB-C
Coil	Three Coils
Input	12V/4A (Max)
Output	Total Output 30W (Max)
Product Size	244.8 x 89.8 x 22.1mm
Color	Fiber green, water green, light wooden-grain
Certification	ETL, RCM, FCC, CE, RoHS, PSE

2*10W output | 3 in 1 wireless charger | The first multiple magnetic charger

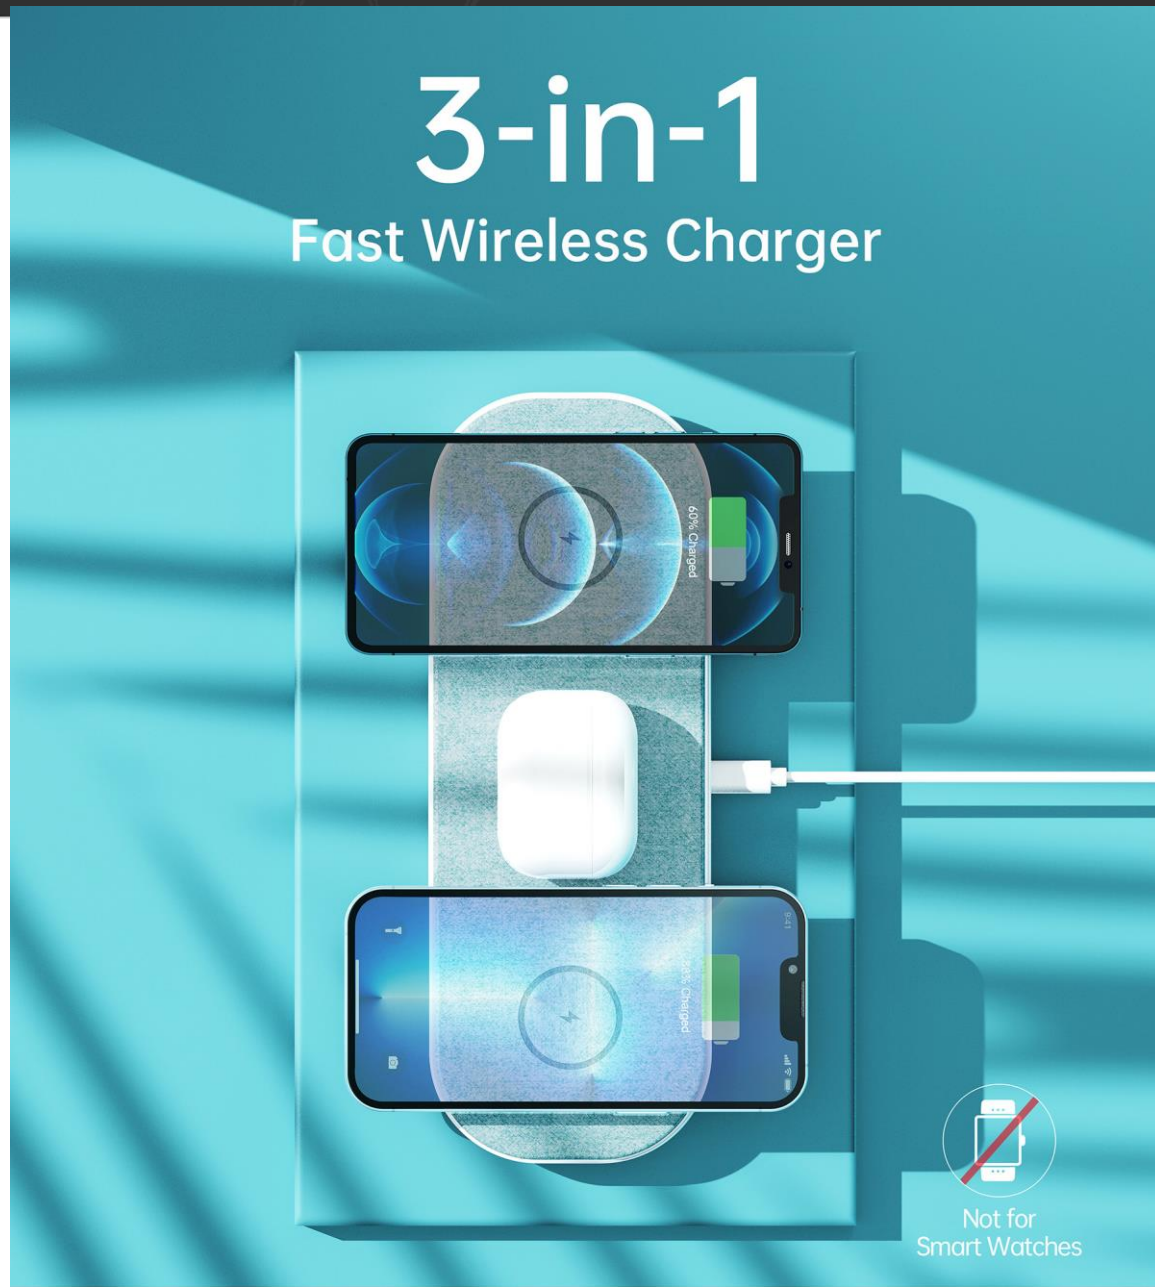

choetech

Refrigeration magnetic Wireless Charger for Iphone12/13/14 series



Product Parameters:

Model	T593-F
Material	PC+ABS+PU
Interface	Typc C
Input	5v-12v /2A (MAX)
Output	15w
Product Size	63 * 23.05mm
Available Color	white/black/ Rose Gold
Certification;	FCC, CE, ROHS, PSE, RCM, UKCA, UKNI

Magnetic wireless charger | 15W Max | Refrigeration system



choetech

15w Samsung watch Fast Wireless Charging Pad



Product Parameters:

Model	T570-S
Material	Anti-fire ABS + PC + Silicone
Interface	USB C
Input	15W (Max)
Output	15W (Max)
Product Size	180*80*12.6mm
Avilable Color	Black, White
Certifications	ETL, RCM, FCC, CE, RoHS

10W output | 2 in 1 phone&Galaxy watch charger | Qi certificates



choetech

10W Fast Wireless Charging Pad



Product Parameters:

Model	T526-S
Material	ABS+Silica gel
Interface	Micro USB
Input	5V-2A , 9V-1.8A
Output	10W (max)
Certifications	FCC, CE, RoHS

Fashion round shape | Silicone antislip | QI certified



choetech

15W Fast Wireless Charging Pad





Product Parameters:

Model	T527-F
Material	Anti-fire ABS
Interface	Micro USB
Input	5V-12V/2A
Output	15W (Compatible with 10W/7.5W/5W)
Product Size	87*87*9mm
Available Color	Black
Certifications	CE, RoHS, FCC, ETL, RCM, PSE

15W output | Support Multiple Fast Charge Protocols | Qi certificates

choetech

15W Fast Wireless Charging Pad



Product Parameters:

Model	T550-F
Material	ABS + PC + Silicone
Interface	USB-C
Coil	Single Coil
Input	5V-12V/2A
Output	15W (Max)
Product Size	99.5*75.5*12.8mm
Available Color	White/Black
Certifications	ETL, RCM, FCC, CE, RoHS

15W output | The middle silicone perfect for airpods | ABS material



choetech

15W Fast Wireless Charging Pad



Product Parameters:

Model	T559-F
Material	zinc-alloy & tempered glass
Interface	USB-C
Input	5V-12V/2A
Output	15W (Compatible with 10W/7.5W/5W)
Product Size	100*100*6.6mm
Available Color	Black
Certifications	ETL, RCM, FCC, CE, RoHS

15W output | zinc-alloy material | Ultra-thin feel



choetech

15W Magnetic Wireless Charger for iPhone 12/13/14 Series



Product Parameters:

Model	T580-F
Coil	Single coil
Material	Aluminium alloy+PC
Interface	USB-C cable, 1M
Input	9V-2.22A(Max)
Output	15W (Max)
Product Size	63*5.9mm
Net Weight	150g
Available Color	Black/White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | Supper thin design | Charging for Iphone 12/13



choetech

15W Magnetic Wireless Charger for iPhone 12/13/14 Series





Product Parameters:

Model	T517-F
Coil	Single coil
Material	Aluminium alloy+PC
Interface	USB-C cable, 1M
Input	9V-2.22A(Max)
Output	15W (Max)
Product Size	60*6mm
Net Weight	150g
Available Color	White
Certifications	ETL, RCM, FCC, CE, RoHS, PSE

15W output | Magnetic Wireless Charger | Charging for iphone 12/13 series

choetech

5-Coils Dual Fast Wireless Charger



Product Parameters:

Model	T535-S ABS + PU
Material	USB-C
Interface	5V/3A, 9V/3A (Max)
Input Output	Total 18W Max


Product Size 170*80*12.4mm
Available Color Black/White/Red/Coral/Blue/Yellow Certifications CE, FCC, RoHS, ETL, RCM, Qi , PSE

5-Coil Dual Fast Charging | Compatible for 2 deivces | Qi certificates



choetech

10W Fast Wireless Charging Pad with 3 Coils

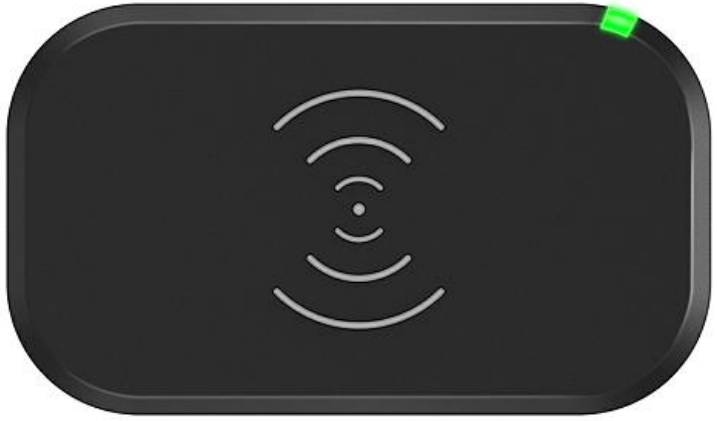

Product Parameters:

Model	T513-S
Material	Plastic
Interface	Micro USB
Input	5V/2A, 9V/1.8A
Output	10W (Compatible with 7.5W/5W)
Product Size	120*70*10.6mm
Available Color	Black/White/Blue/Gold/Red
Certifications	Qi, CE, RoHS, FCC, ETL, RCM, PSE

10W output | 3 coins wireless charger | Qi certificates



choetech


10W Fast Wireless Charging Pad



Product Parameters:

Model	T511-S
Material	Plastic
Interface	Micro USB
Input	5V/2A, 9V/1.8A
Output	10W (Compatible with 7.5W/5W)
Product Size	91*91*8.5mm
Available Color	Black/Red/White/Gold
Certifications	CE, RoHS, FCC, Qi, ETL, RCM, PSE

10W output | Best seller of choetech(sold more than 10k pcs per day) | Qi certificates

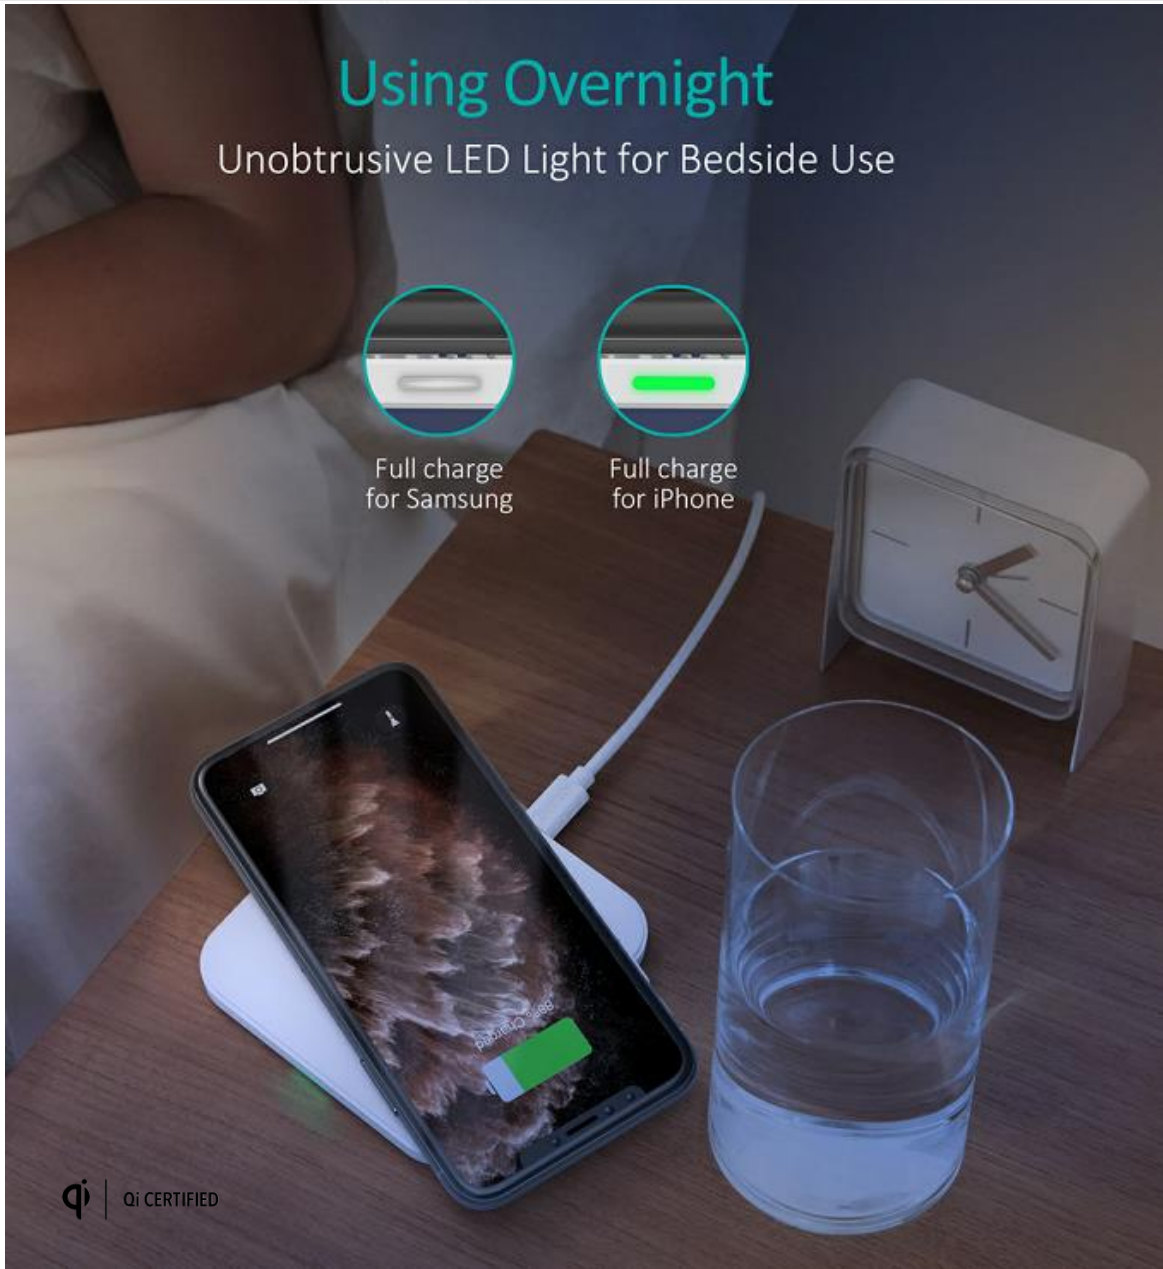

choetech **Best Seller**

15w Magnetic wireless car charger holder



Product Parameters:

Model Name: T200-F
Material: Anti-fire ABS + PC + Silicone
Interface: Type-C
Input : 15W(Max)
Output: 15W(Max)
Avilable Color: Black

Magnetic Wireless car charger | 15W Max | Compatible for new iphone series



choetech **Best Seller**


Choetech 15W Automatic Wireless car charger holder with 3 magnetic replacable heads



Product Parameters:

Model Name: T201-F
Material: PC+ABS
Size: 75*55*124mm
Wireless charging power: 15W/10/7.5W/5W
Inductor: FOD coil induction
Charging distance: ≤6mm
Output support: 5V/1A, 9V/1.2A 9V/1.67A
Input support: 9V 1.67A, 9V 2A
Wireless charging conversion efficiency: 75%-80%
Charging port: Type C
Super capacitor: *1
*FOD version, touch switch

wireless chargering type	15W Max	cable charging type

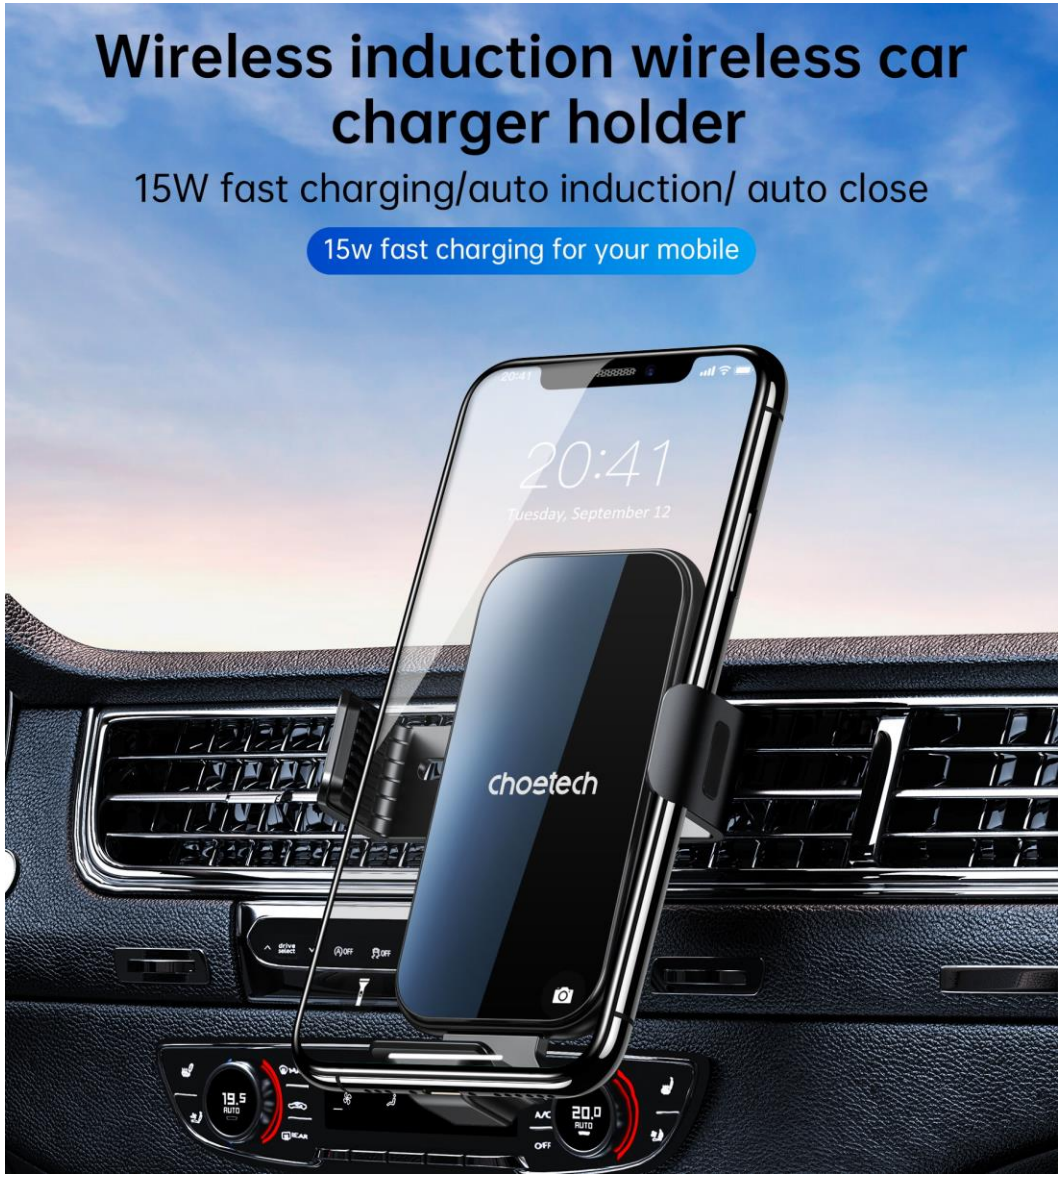

choetech


Choetech 15W Automatic Wireless car charger holder without 3 magnetic replacable heads



Product Parameters:

Model Name: T202-F
Material: PC+ABS
Size: 75*55*124mm
Wireless charging power: 15W/10/7.5W/5W
Inductor: FOD coil induction
Charging distance: ≤6mm
Output support: 5V/1A, 9V/1.2A 9V/1.67A
Input support: 9V 1.67A, 9V 2A
Wireless charging conversion efficiency: 75%-80%
Charging port: Type C
Super capacitor: *1
*FOD version, touch switch

wireless chargering type	15W Max	cable charging type

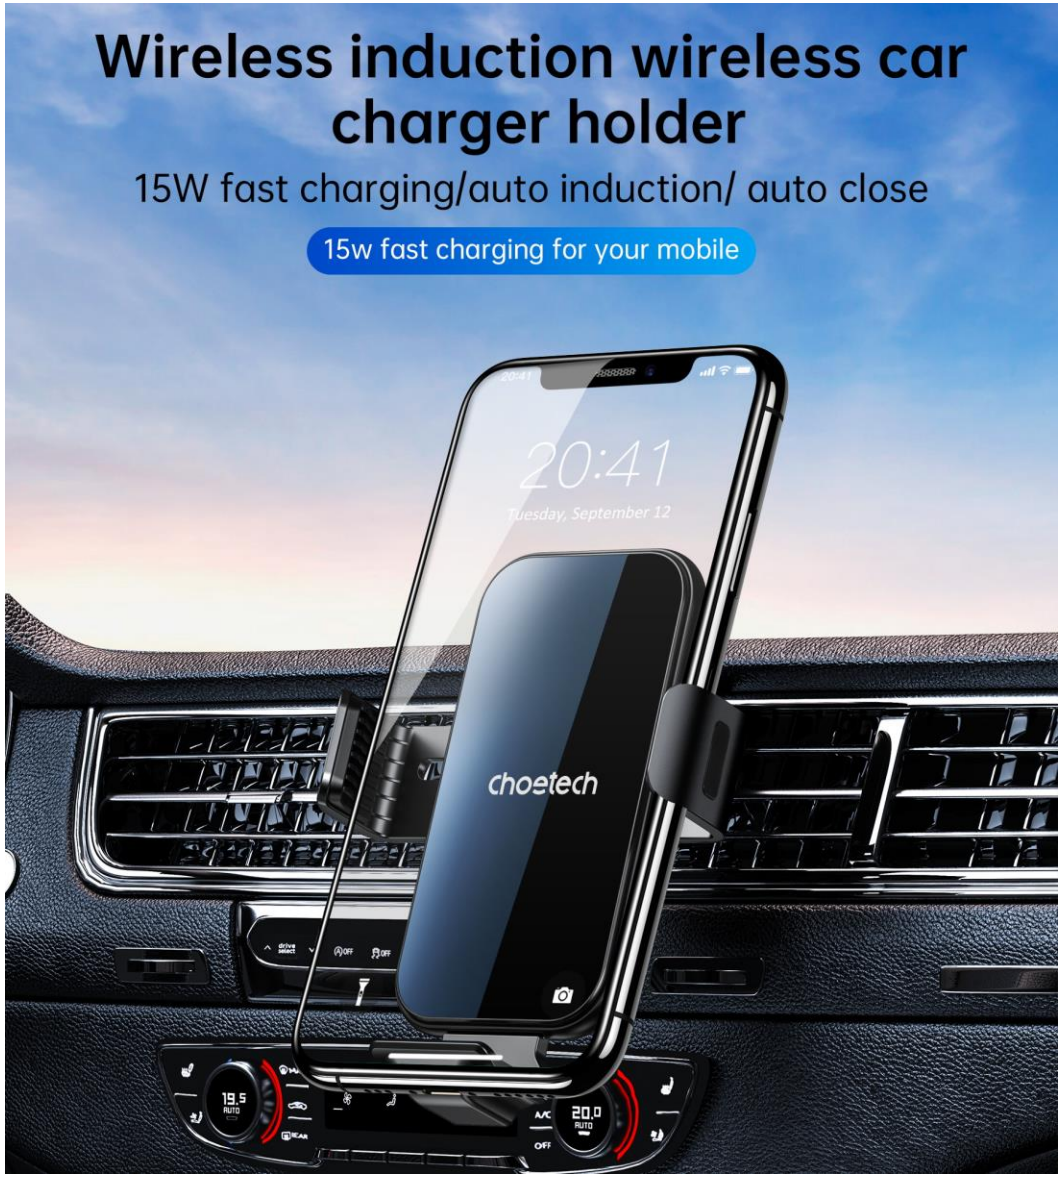

choetech **Best Seller**

Choetech 15W Gravity car charger holder



Product Parameters:

Model T203-F
Material Anti-fire ABS + PC + Silicone
Interface USB C
Input 5-12V/2A
Output15W (Max)
Avilable Color Black
Certifications ETL, RCM, FCC, CE, RoHS
Accessories 15w charger+ air vent clamp+1m type-c cable
Product dimension: 117.2*101*50.4mm

wireless chargering type	15W Max	LED display

choetech **Best Seller**

Choetech 15W Magnetic car charger holder



Product Parameters:

Model T204-F
Material Alluminium alloy+tempered glass+PC
Interface USB C
Input 5-12V/2A
Output15W (Max)
Avilable Color Black
Certifications FCC, CE, RoHS
Accessories 15w charger+ air vent clamp+1m type-c cable

wireless chargering type	15W Max	Breathing green light



choetech **Best Seller**

Choetech 15W Magnetic car charger holder



Product Parameters:

Model T205-F
Material PC+ABS
Interface USB C
Input 5-12V/2A
Output15W (Max)
Avilable Color Black
Certifications FCC, CE, RoHS
Accessories 15w charger+ air vent clamp+1m type-c cable

wireless chargering type	15W Max	Breathing blue light



choetech **Best Seller**

Choetech 15W Magnetic car charger holder



Product Parameters:

Model T206-F
Material PC+ Silicone
Interface USB C
Input 5-12V/2A
Output15W (Max)
Avilable Color Black
Certifications FCC, CE, RoHS
Accessories 15w charger+ air vent clamp+1m type-c cable

wireless chargering type	15W Max	Strong magnetic

choetech **Best Seller**

Choetech 15W Magnetic car charger holder



Product Parameters:

Model T208-F
Magnetic Car Wireless Charger
Material: ABS+ PC
Interface: USB-C
Input: 5-12V/3A (Max)
Output: iPhone 15W (Max)
Available Color: Black White
Certifications: FCC, CE, RoHS
Accessories 15w charger+ air vent clamp+1m type-c cable

wireless chargering type	15W Max	Strong magnetic

choetech

10W Fast Wireless Car Charger







Product Parameters:

Model	T521-S & T521-F
Material	PC + ABS
Interface	Type-C
Input	5V/2A, 9V/1.8A
Output	10W & 15W (Compatible with 10W/7.5W/5W)
Phone Clamp Range	60-102mm
Available Color	Black
Certifications	CE, FCC, RoHS, ETL, RCM

10W output | Good shockproof effect | Air vent mount or suction cup dock

choetech

10W Gravity Wireless Car Charger



Product Parameters:

Model	T536-S
Material	Anti-fire ABS
Interface	Micro USB
Input	5V/2A, 9V/1.8A
Output	10W (Compatible with 7.5W/5W)
Phone Clamp Range	65-90mm
Available Color	Black + Silver, Black + Red
Certifications	CE, FCC, RoHS, ETL, RCM, PSE

10W output | Gravity linkage design | Air vent mount or suction cup dock

One Hand Operation Gravity Linkage & Auto Lock



4 Convenient Ways to Mount










choetech

Solar Series

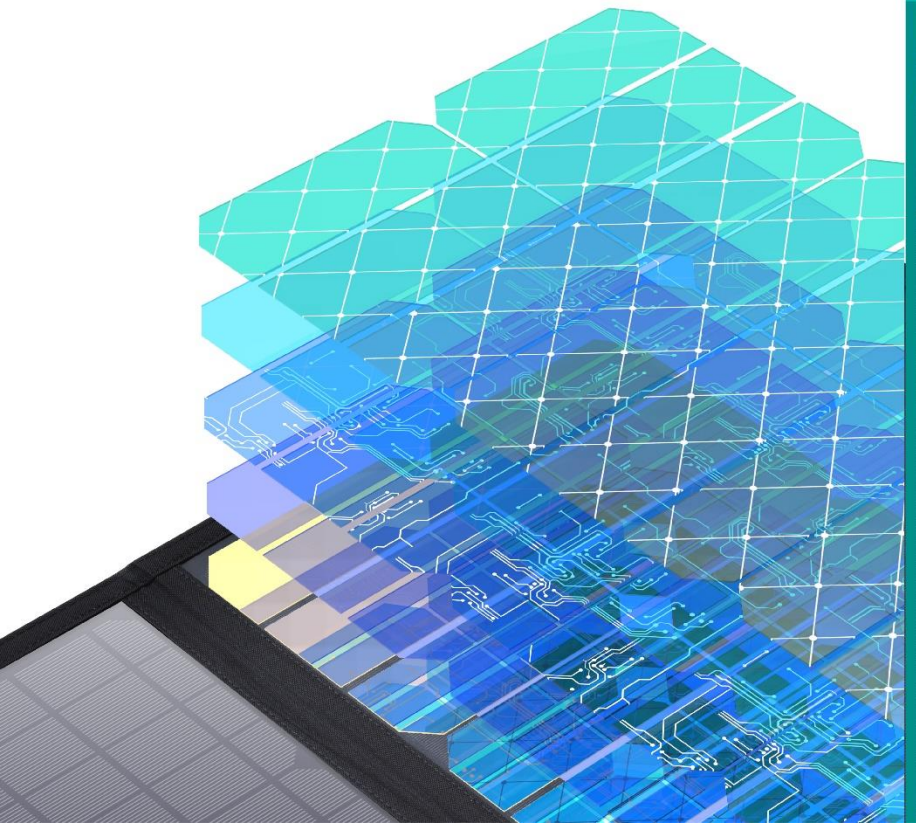



choetech **Bestseller**

14W Foldable Solar Charger



Product Parameters:

Model	SC004
Material	Waterproof Nylon + Sunpower Solar Panel
Interface	1*USB-A
Output	5V/2.4A(Max)
Total Power	14W
Opened Size	660*148*31mm
Closed Size	148*153*54mm
Certification	CE, FCC, RoHs

Mini easy to carry | 14W Single Output | Waterproof material



choetech **Bestseller**

19W Foldable Solar Charger



Product Parameters:

Model	SC001
Material	Polyester canvas + Sunpower Solar Panel
Interface	2*USB-A
Output	5V/2.4A
Total Power	19W
Opened Size	530*260mm
Closed Size	260*160*mm
Certification	CE, RoHs, PSE

Mini easy to carry | 19W Dual USB-A Output | Waterproof material



choetech **Bestseller**

22W Foldable Solar Charger



Product Parameters:

Model SC005-V5
Material: PET+EVA
Conversion Efficiency: 21%-24%
USB1 Output 5V/2.4A(Max)
USB2 Output 5V/2.4A(Max)
Total Output 22W(Max)
Certification CE, FCC, RoHs




Mini easy to carry | 22W Dual USB-A Output | Waterproof bag

choetech **Bestseller**

36W Foldable Solar Charger





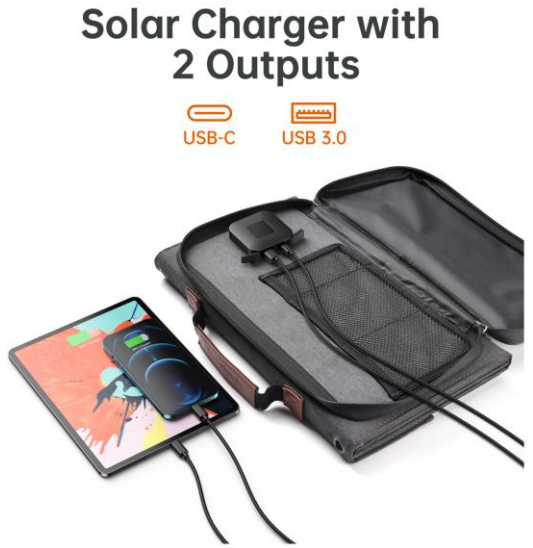

Product Parameters:


Model	SC006-V5
Material	Material PET Solar Panels + Built-in EVA + Solar Cell + TPT + Waterproof Cloth
Interface:	2*USB-A
Output	USB-C:20W Max (PD3.0、FCP、AFC、QC3.0、Apple2.4) USB-A:QC 18W Max（FCP、AFC、SCP、QC3.0、Apple2.4） USB-A&USB-C share 5V-4.8A(MAX)
Total Power	36W(Max)
Opened Size	948*360*5mm
Closed Size	360*195*35mm(folded size)
Certification	CE, FCC, RoHs

Mini easy to carry | 36W 1C+1A Output | Waterproof bag



choetech

80W Foldable Solar Charger

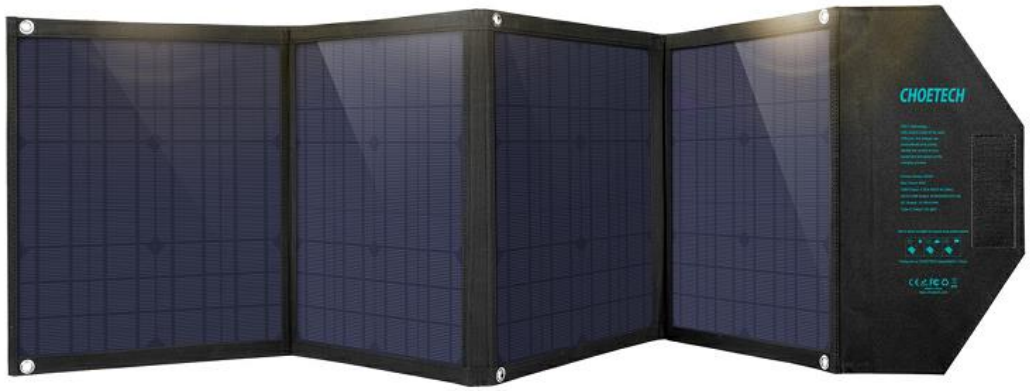

Product Parameters:

Model	SC007
Material	PET Solar Panels + Built-in EVA + Solar Cell + TPT + Waterproof Cloth
Interface	2*USB-A, 1*USB-C, 1*DC
Output	DC: 12-18V/4.44A; USB-C: PD30W; USB-A1: QC3.0 18W; USB-A2: 5V-2.4A
Total Power	80W(Max)
Opened Size	410*360*2.7mm
Closed Size	1580*410*4.6mm
Certification	CE, FCC, RoHs

Easy to carry | 80W 2A+1C+1DC Output | IPX4 Waterproof



choetech

100W Foldable Solar Charger



Product Parameters:

Model	SC009
Material	Waterproof nylon
Interface	2*USB-A, 1*USB-C, 1*DC
Output	DC: 12-18V/5.55A (Max) USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A (Max) USB-A1: 5V/3A, 9V/2A, 12V/1.5A (Max); USB-A2: 5V-2.4A(Max)
Total Output	100W
Opened Size	505 x 370 x 37mm
Closed Size	1700 x 370 x 4.7mm
N.W	4.15KG
Certification	CE, FCC, RoHs

Easy to carry | 100W 2A+1C+1DC Output | IPX4 Waterproof Material



choetech

Integrated laminated 40% off 100W Lightweight




Product Parameters:

Model SC009-V5
Open circuit voltage (@STC): 24.5V ±5%
Standard operating voltage (@STC): 19.4V ±5%
Standard operating current (@STC): 5.4A ±5%
Short circuit current (@STC): 5.8A ±5%
Note: STC: Standard Tested Condition: AM=1.5, 25℃, 1000W/㎡
(2) Controller electrical performance parameters
4. Dimensions and specifications of finished solar panels (cutting process: machine cutting)
Expanded size: 1740×426×27±1mm
Folding size: 475×426×42±1mm
Solar panel weight (including adapter cable): 3.46±0.10kg
1. Packing contents: solar panel, color box, outer box (pack of three)
2. Packaging size specifications
Product size: 475×426×42mm Weight: 3.46±0.10kg
Color box size: mm Weight: ±0.03kg
Outer box size: mm Weight: ±0.03kg

Easy to carry | 100W 2A+1C+1DC Output | IPX4 Waterproof Material

choetech

120W Foldable Solar Charger

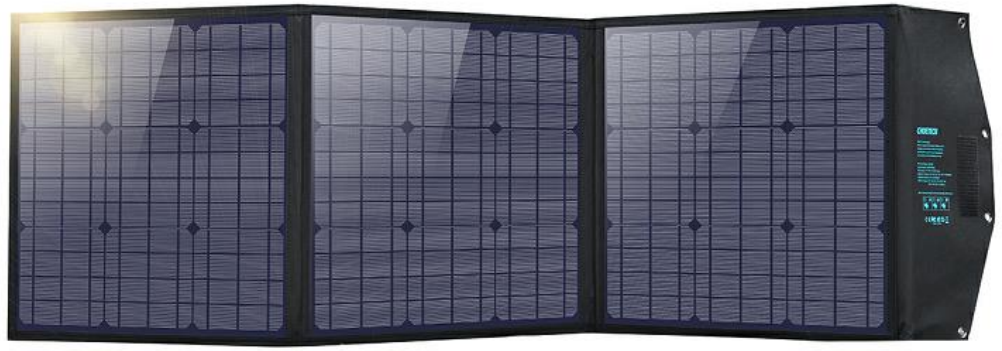

Product Parameters:

Model	SC008
Material	Monocrystalline silicon, solar energy conversion efficiency 21-23% Oxford PVC waterproof fabric, waterproof grade IPX4
Interface	2*USB-A, 1*USB-C, 1*DC
Output	DC: 12-18V/6.66A (120W Max) USB-C: 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-3A(60W Max); USB-A1: 5V-3A, 9V-2A, 12V-1.5A(18W Max); USB-A2: 5V-2.4A(12W Max)
Opened Size	53x52x1.9cm
Closed Size	177x53x0.54cm
Protocol	PD3.0/QC3.0/QC2.0/Apple-2.4A/ Samsung-AFC-9V/HUAWEI-FCP-9V/Apple-2.4A
Certification	CE, FCC, RoHs

Easy to carry | 100W 2A+1C+1DC Output | 23% Energy conversion efficiency



choetech

Choetech 160W Foldable Solar Charger



Product Parameters:

Model SC010

Product Specifications Rated Power: 150W

Tolerance: ±5%

Working voltage: 18V

Working current: 8.33A

Folded size: 545×351×20mm

Expanded size: 1965x545X4mm

Weight: 6600g

Easy to carry | 160W Output Max | 23% Energy conversion efficiency



choetech

Choetech 200W Foldable Solar Charger



Product Parameters:

Model SC011

Product Specifications Rated Power: 200W

Tolerance: ±5%

Working voltage: 18V

Working current: 11.11A

Folding size: 600×527×20mm

Expanded size: 3000x527×4mm

Weight: 8800gCertification CE, FCC, RoHs

Easy to carry | 200W 1DC Output | 23% Energy conversion efficiency



Choetech 200W Foldable Solar Charger

Product Parameters:

Model SC011-V5

Expanded size: 2240×610×27±1mm

Folded size: 610×597×42±1mm

Finished product weight: 5.4±0.10kg

Output power (@STC) 210.0W ±5%

Open circuit voltage (@STC): 24.48V ±5%

Standard operating voltage (@STC): 19.44V ±5%

Standard operating current (@STC): 10.802A ±5%

Short circuit current (@STC): 11.666A ±5%

1. Packing contents: solar panels, color box, outer carton (pack of four)

2. Packaging size specifications

Product size: 610×597×42mm Weight: 5.4±0.10kg

Color box size: 650×645×86mm Weight: 0.8±0.03kg


Outer box size: 660×655×360mm



Easy to carry | 200W 1DC Output | 23% Energy conversion efficiency

choetech

Choetech 400W 4 panels Solar Charger

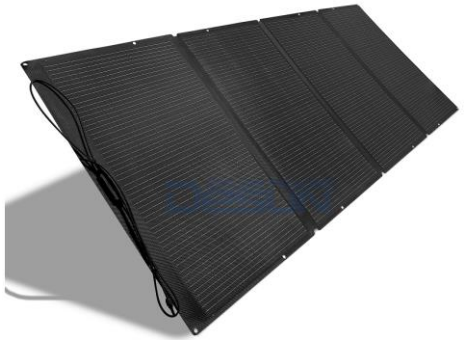

Product Parameters:

Model SC012

Product Specifications Rated Power: 400W

Interface : MC4

Output: 400w max (MC4 power to the portable station)

Optimal operating voltage (Vmp): 36 V.

Optimal operating current (Imp): 11.1A.

Open voltage (Voc): 43.2 V.

Short circuit current (Isc): 12A

Folding size: 652*535*60mm ; Expanded size: 2430*535*30mm Weight: 15.43Kg

Certification CE, FCC, RoHs

Accessories: 2meter MC4 cable

charge for Portable station | 400W Output | 23% Energy conversion efficiency



choetech

Choetech 200w 4panels Solar Charger

Light weight



Product Parameters:

Model	SC014
Material	1200D Waterproof nylon
Interface	MC4
Output	DC: 20V/10A ; 39V/5.12A
Total Output	200W
Opened Size	237x 56x 2.5mm
Closed Size	56 x 63x 4.5mm
N.W	5.15KG
Certification	CE, FCC, RoHs

5.15kg light weight | 200W Output | charge for portable station



choetech

Choetech 250w 5panels Solar Charger



Light weight



Product Parameters:

Model	SC015
Material	1200D Waterproof nylon
Interface	MC4
Output	DC: 20V/12.5A ; 39V/5.12A
Total Output	250W
Opened Size	237x 56x 2.5mm
Closed Size	56 x 63x 4.5mm
N.W	5.15KG
Certification	CE, FCC, RoHs


5.15kg light weight | 250W Output | charge for portable station

choetech

Choetech 300w 4panels Solar Charger

Light weight



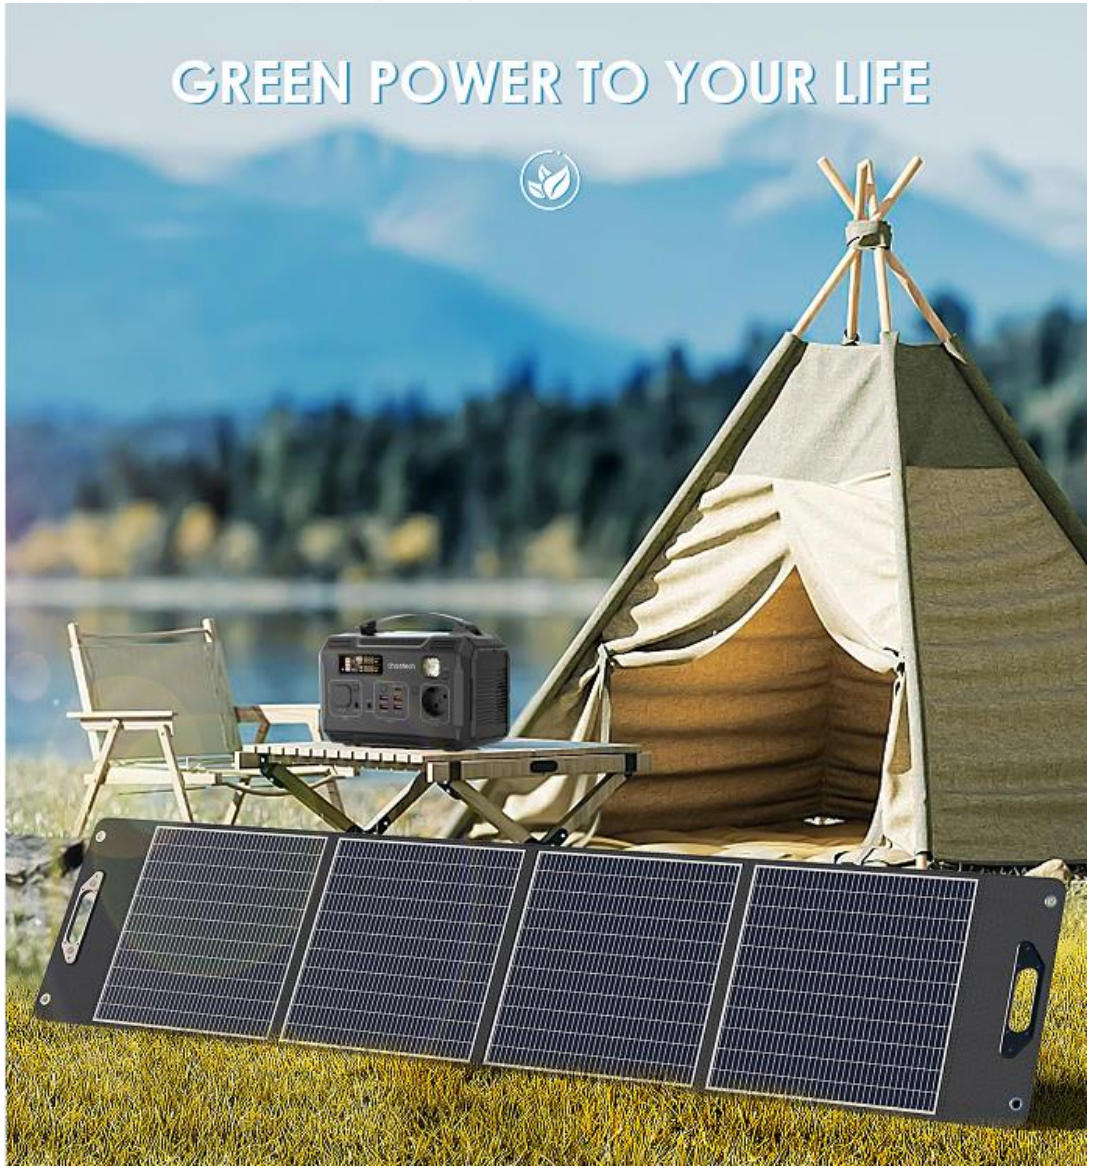

Product Parameters:

Model	SC016
Material	1200D Waterproof nylon
Interface	MC4
Output	DC: 20V/15A ; 39V/7.69A
Total Output	300W
Opened Size	235.5x 72x 2.5mm
Closed Size	72x 63x 5mm
N.W	6.35KG
Certification	CE, FCC, RoHs


6.35kg light weight | 300W Output | charge for portable station

choetech

Choetech 400w 4panels Solar Charger



Light weight

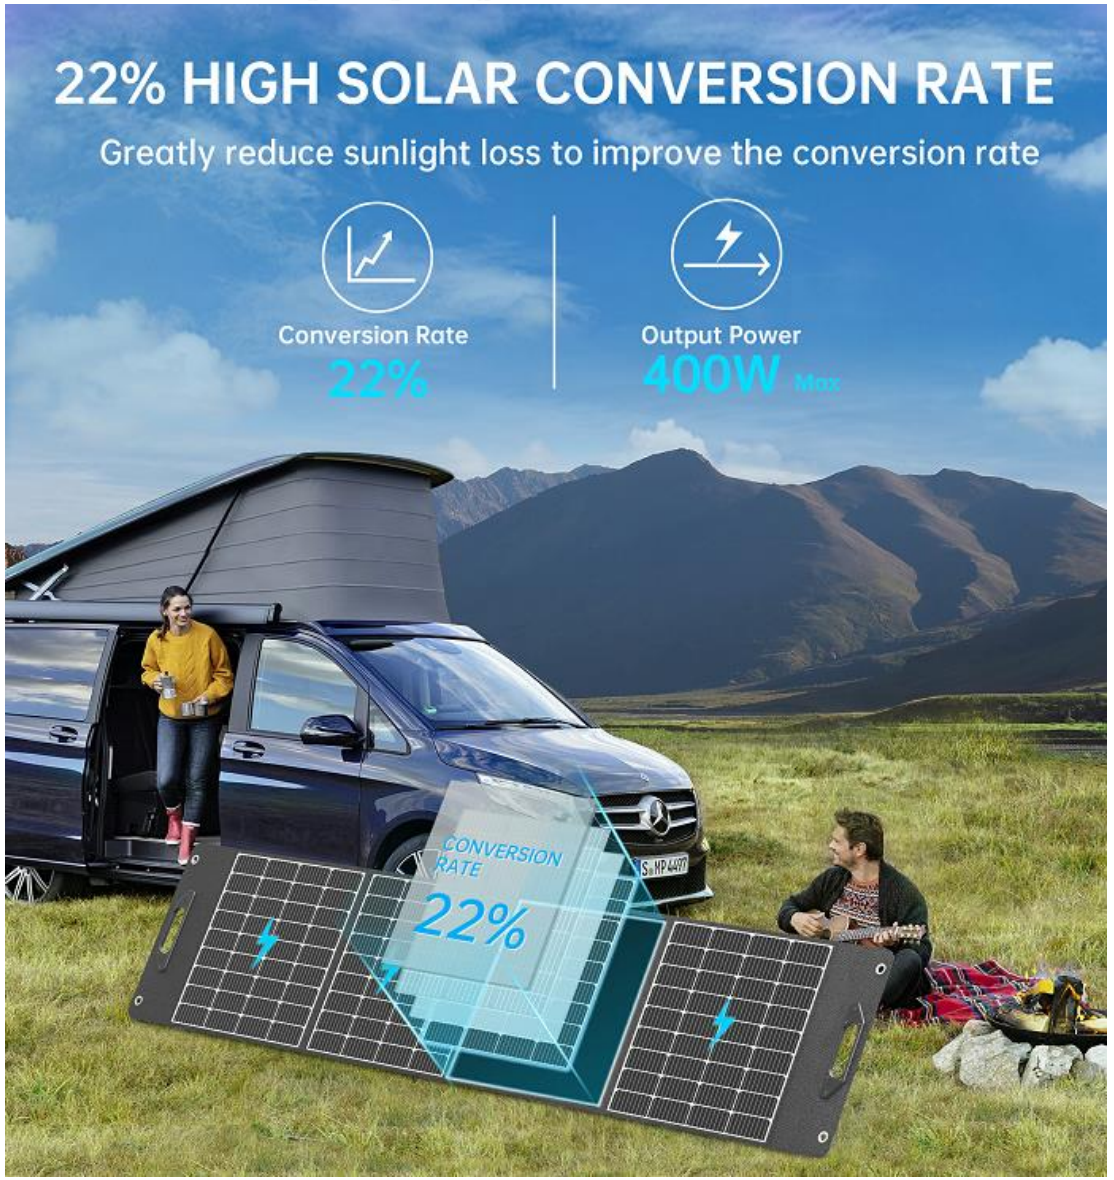

Product Parameters:

Model	SC017
Material	1200D Waterproof nylon
Interface	MC4
Output	DC: 39V/10.25A
Total Output	400W
Opened Size	3030x 800x 25mm
Closed Size	800x 79.5x 45mm
N.W	10KG
Certification	CE, FCC, RoHs

10kg light weight | 400W Output | charge for portable station

choetech

Choetech 100W Lightweight One piece laminationFoldable Solar Charger

Lightweight



Product Parameters:


Model	SC019
Material	Polyester canvas + Sunpower Solar Panel
Interface	1*MC4
Output	12-19.4V/6.2A
Total Power	100W (Max)
Opened Size	1110×610×31±1mm
Closed Size	610×597×31±1mm
N.W	2.9±0.10kg
Certification	CE, RoHs,

easy to carry | 100W Output | Waterproof material

choetech

Choetech 200W lightweight One piece lamination Foldable Solar Charger

Lightweight

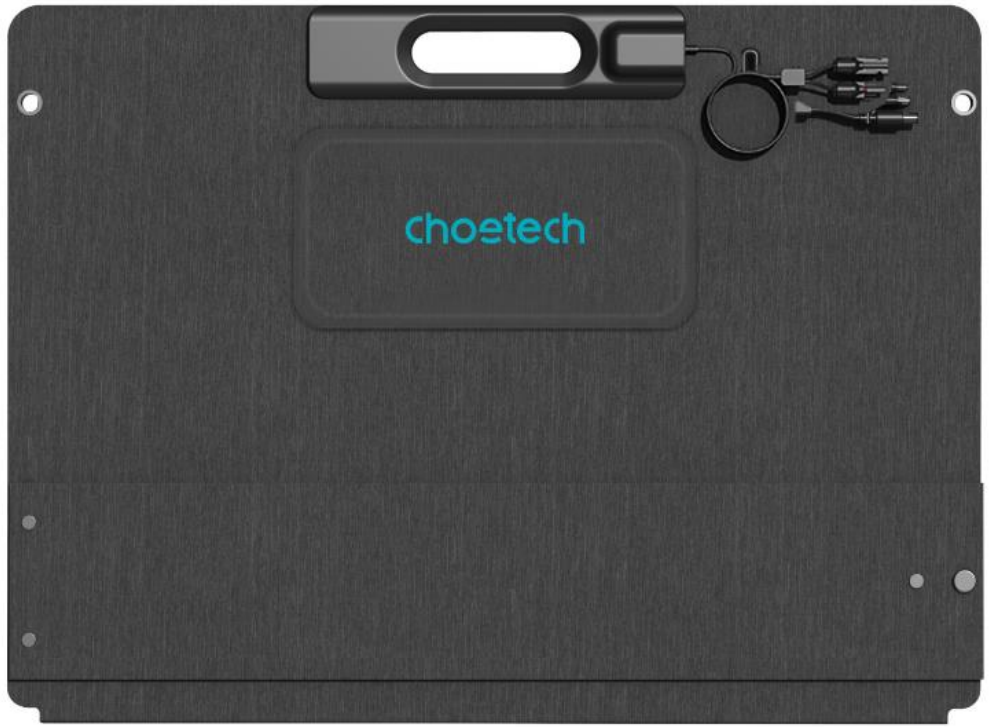

Product Parameters:

Model	SC020
Material	Polyester canvas + Sunpower Solar Panel
Interface	1*MC4
Output	12-19.4V/10.8A
Total Power	200W (Max)
Opened Size	2240×610×27±1mm
Closed Size	610×597×42±1mm
N.W	5.4±0.10kg
Certification	CE, RoHs,

easy to carry | 200W Output | Waterproof material

choetech

40% off 100W
Lightweight integrated laminate





Product Parameters:

Model:SC031
USB-C: 45W.(5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A).
* USB-A: Qc3.018W (5V/3A 9V/2A 12V/1.5A).
DC5521 Output 3. Solar panel output electrical performance parameters
(1) Electrical performance parameters of bare plate
Output power (@STC) 60.0W ±5%
Open circuit voltage (@STC) : 24.48V ±5%
Standard operating voltage (@STC) : 19.44V ±5%
Standard operating current (@STC) : 3.086A ±5%
Short circuit current (@STC) : 3.333A ±5%





lightweight | mini size | Waterproof bag

choetech

40% off 200W
Lightweight integrated laminate



Product Parameters:

Model:SC020
Battery: Tunway 182
Expansion size: 2240×610×27±1mm
Folding size: 610×597×42±1mm
Finished weight: 5.4±0.10kg
Output power (@STC) 210.0W ±5%
Open circuit voltage (@STC) : 24.48V ±5%
Standard operating voltage (@STC) : 19.44V ±5%
Standard operating current (@STC) : 10.802A ±5%
Short circuit current (@STC) : 11.666A ±5%






lightweight | mini size | Waterproof bag

choetech

200W Flexible solar energy

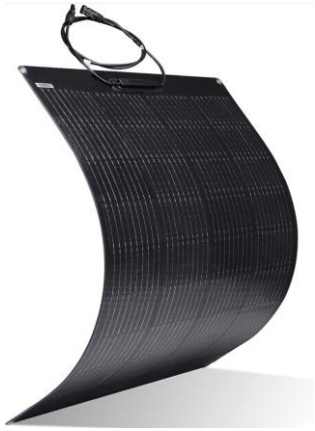



Product Parameters:


Model	SC040
Material	Polyester canvas + Sunpower Solar Panel
Interface	1*MC4

Max.Power(Pmax)：200W
Open Circuit Voltage(Voc)：24.5V
Short Circuit Current(Isc)：11.1A
Voltage at Pmax (Vmp)：19.4V
Current at Pmax (Imp)：10.3A
Dimensions：1150x970x17.5mm
Weight：4kg
Solar Cell：72.8x182 Mono

360 degree flexible | 200W Output | 4KG light weight

choetech

100W Flexible solar energy

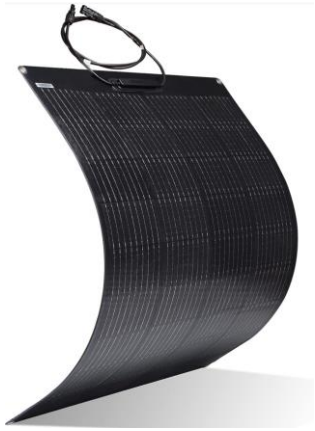

Product Parameters:

Model	SC041
Material	Polyester canvas + Sunpower Solar Panel
Interface	1*MC4
Max.Power(Pmax)：	100W
Open Circuit Voltage(Voc)：	19.8V
Short Circuit Current(Isc)：	6.16A
Voltage at Pmax (Vmp)：	17.1V
Current at Pmax (Imp)：	5.84A
Dimensions：	1055*612*2.1mm
Weight：	4kg



360 degree flexible | 100W Output | 4KG light weight

choetech

Choetech Solar TWS sports waterproof with 2500mAh powerbank



Product Parameters:

Bluetooth version: V5.0
Bluetooth operating frequency: 2.402GHz-2.480GHz
Receiving distance: ≤15 m
Audio S/N:≥95dB
Battery: Lithium battery 3.7V/ 55mAh
Microphone: digital silicon microphone 38dB
Charging time: earbuds 1.5H, charging case about 2H
Talking/playing time: about 6-8 hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: A2DP、AVRCP、SPPP、HFP、HSP

Solar charging TWS | 2500mAh powerbank | Hifi sound



choetech

Choetech Solar TWS







Product Parameters:

Model: BH-T09

Bluetooth version: V5.0

Frequency: 2.402GHz-2.480GHz

Transmission distance: ≥10mm

Impedance: 16Ω±15%

Headphone battery capacity: 40mAh/3.7V

Charging compartment battery capacity: 300mAh/3.7V

Compatible devices: HSP,HFP,A2DP,AVRCP

Talking/listening time: 4-5hour

Material: PC+Metal

Properties: Headphone IPX7 Waterproof

Colour: Black

choetech

Choetech 20000mAh PD20W+QC18W Wireless Charging Qi 10W Solar PowerBank

Product Parameters:



Model Number: B657

Product Type: 6W High Power Flashlight Solar Wireless Charging Power Bank

Solar power: single crystal 2W (300mah)

Product color: black blue, all black, black orange, black green,

Cell: polymer cell

Capacity: 20000mAh (standard 33600mAh)

Input: "Type-C (PD18W): 5V/3A 9V/2A

Micro: 5V/2A 9V/2A

Output: USB (A1): 5V/3A 9V/2A 12V/1.5A

USB (A2/A3): 5V/3A Type-C (PD20W) 9V/2.2A 12V/1.67A QI: 10W

Product size: 178*90*30mm

Packing size: 200*130*32mm (color box)

Shell material: plastic ABS+PC+aluminum alloy+silicone

Packing information: "41*35*22 (30 units/19.3KG)

48*22*15CM (14 units/9.3kg)

Weight: Product (530g) + Package (85g)

Accessories: Micro cord, Velcro cord, packaging

Other features: Large capacity, 10W wireless charging, 6W high-brightness dual LED flashlight, waterproof for life



choetech

Choetech 10000mAh Solar PowerBank without wireless charging function

Product Parameters:



Model Number: B658

Solar power: single crystal 1.8W

Product color: black blue, all black, black orange, black green

Cell: polymer cell

Capacity: 10000mah standard

Input: TYPE-C: 5V/2A

Output: USBA1: 5V/2.1A

Product size: 171*84*22mm

Packing size: 191*117*25mm

Shell material: plastic ABS+TPU

Packing information: 29.5*37*20.5CM (30 units/12.8kg)

Weight: Product (328g) + Package (82g)

Accessories: Micro cord, Velcro cord, packaging

Other features: large capacity, high-brightness flashlight, fully waterproof



choetech

Choetech 10000mAh Qi 5W Wireless Charging Solar PowerBank

Product Parameters:



Model Number: B659

Solar power: single crystal 1.8W

Product color: black blue, all black, black orange, black green

Cell: polymer cell

Capacity: 10000mah standard

Input: TYPE-C: 5V/2A

Output: USBA1: 5V/2.1A

USBA2: 5V/2.1A QI: 5W

Product size: 171*84*22mm

Packing size: 191*117*25mm

Shell material: plastic ABS+TPU

Packing information: 29.5*37*20.5CM (30 units/12.8kg)

Weight: Product (328g) + Package (82g)

Accessories: Micro cord, Velcro cord, packaging

Other features: large capacity, high-brightness flashlight, fully waterproof



choetech

Outdoor Wireless Solar Security Camera System With 18000mAh Rechargeable Battery

Product Parameters:




APP operating system Android, IOS
Sensor 1/2.7″ Image Sensor
Compression format H.264+/H.265
Pixel 1920*1080 1080P
WIFI 2.4GHz WIFI
Detection mode: PIR human body sensor + Ai human body detection
Detection distance 0-12M
Detection angle 95°
Alarm mode Real-time call to mobile phone or information push
PTZ angle horizontal 355 ° vertical 100 °
Speed Horizontal 55°/sec Vertical 40°/sec
Full color night vision illumination 0.001LUX
Infrared light Infrared LED distance 30M
White light LED distance 30M
Built-in speaker 3W
Built-in microphone monitor range 20M
Focal length 3.6mm
Angle 95°
Cloud storage Cloud storage (alarm recording)
Local storage TF card (maximum 128G)
Power supply mode: solar panel + battery
Solar battery power 8W
Battery capacity Maximum support 6 18650 batteries
Maximum working power 4W
Standby power 0.003W
Working environment indoor/outdoor
Working temperature -30°~+60°
Working humidity 0%~90%RH



Solar charging camera | 18000mAh rechargeable battery | Support APP remote control

choetech

Choetech APP operating system Android, IOS 8W Solar Camera

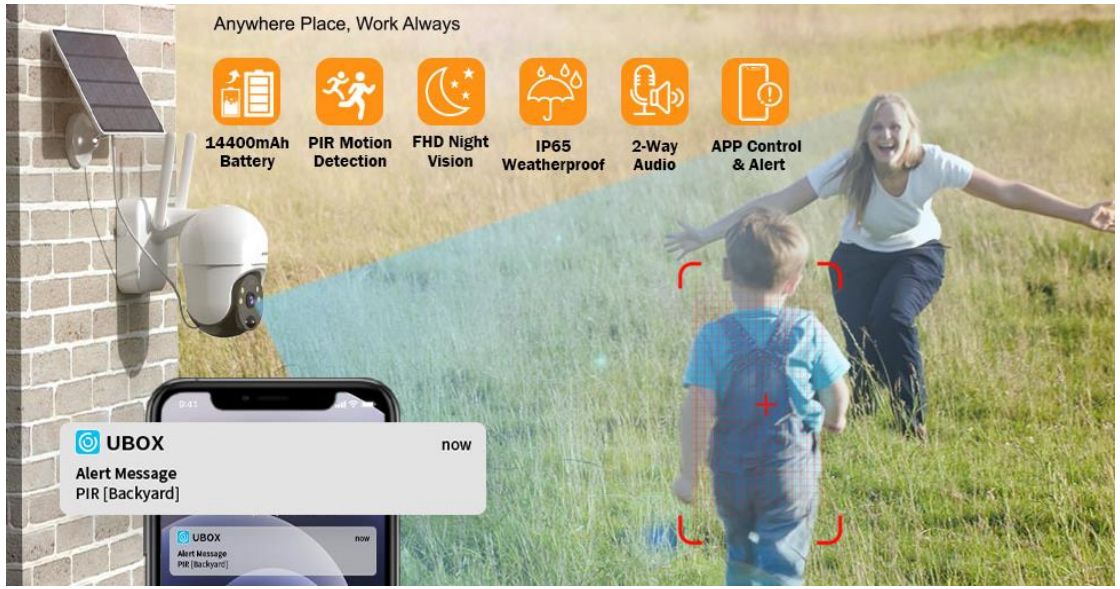





Sensor 1/2.7″ Image Sensor

Compression format H.264+/H.265

Pixel 1920*1080 1080P

Detection mode: PIR human body sensor + Ai human body detection

Detection distance 0-12M

Detection angle 95°

Alarm mode Real-time call to mobile phone or information push

PTZ angle horizontal 355 ° vertical 100 °

Speed Horizontal 55°/sec Vertical 40°/sec

Full color night vision illumination 0.001LUX

Infrared light Infrared LED distance 30M

White light LED distance 30M

Built-in speaker 3W

Built-in microphone monitor range 20M

Focal length 3.6mm

Angle 95°

Cloud storage Cloud storage (alarm recording)

Local storage TF card (maximum 128G)

Power supply mode: solar panel + battery

Solar battery power 8W

Maximum working power 4W

Working temperature -30°~+60°

Working humidity 0%~90%RH

Choetech APP operating system Solar Power Alert PTZ Camera-4G General Resolution 3MP 4MP





2048*1536 2592*1520

Main processor Ingenic-T31ZL Ingenic-T31ZX

Image Senor GC2063 GC4653

Compression H.264+/H.265

Internet Connection 4G TD-LTE,TD-LTE / LTE FDD TD-LTE / LTE-FDD

4G Version CN/ AU/ EU/ JP/ US/ ASEAN (Optional)

Alarm Detection Mode PIR Human detection + AI Human shape detection

Detection Distance 0~12M

Detect Angle 105°

Alarm Mode Realtime calling or push message

PTZ PTZ Angle Horizontal 355° Vertica 100°

Speed Horizontal 55°/S Vertical 40°/S

Night Vision Full color night vision 0.001 Lux

IR LED infrared LED 20M IR distance

White light LED white light LED 20M distance

Audio Built-in speaker (input) 3W

Built-in microphone (output) voice monitoring distance 20M

Lens Lens 2.8mm

Lens Angle 105°

Storage Cloud Storage Cloud storage, storage when alarm recording

Local Storage TF Card Max 128G

Power Power Supply Mode Solar Panel+ Build in Batteries

Panel Material monocrystalline silicon

Solar Energy Power 5W

Battery Capacity 4pcs 18650

Operating power consumption Max 3W

Standby consumption 0.003W

Others Working Environment Indoor/outdoor

Operation Temperature -30°~+60°

Humidity 0%~90%RH



EV Charger

Choetch 5M single phase 240V 16A 3.5KW EV Charger



Model Name: 01.01.03.XX-ACG11-DS16AD-EU5-WH
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V
Current:6A Min-10A Min-16A Min Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 3.5KW

3.5KW Max	250V EU standard	16A charging current



Choetech 5M single phase 240V 32A 7KW EV Charger



Model Name: 01.01.03.XX-ACG11-DS32AD-EU5-WH
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V
Current:6A Min-10A Min-16A Min 32AMax
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 7KW

7KW Max | 240V EU standard | 32A charging current



Choetch 5M three phases 380V 16A 11KW EV Charger



Model Name: 01.01.03.XX-ACG11-DT16AD-EU5-WH
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V/380V
Current:6A Min-10A Min-16A Min Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 11KW

11KW Max | 380V EU standard | 16A charging current



Choetch 5M three phases 380V 32A 22KW EV Charger



Model Name: 01.01.03.XX-ACG11-DT32AD-EU5-WH
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V/380V
Current:6A Min-10A Min-16A Min 32A Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 22KW

22KW Max | 380V EU standard | 32A charging current



Choetch 5M model 2 single phase 240V 16A 3.5kw EV Charger



Model Name: 01.01.03.XX-ACG12-PS16AX-EU5-WH
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V
Current:6A Min-10A Min-16A Min Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 3.5KW
Adaptor cable length: 0.9meter
EV charger cable: 5meter



3.5KW Max	240V EU adaptor	6A,10A,13A,16A adjustable

choetech

Choetech Portable LCD Display plug and play EV Charging Cable 32A 7KW

LCD

Plug and play 7KW

Portable, plug and play



Product Parameters:

Model: 01.01.03.XX-ACG12-PS32AX-EU5-WH
Install： Portable, plug and play
Power Supply： AC power supply socket
Voltage(choose one only)： AC 240V
Current： 6A Min-10A Min-13A Min-16A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
MTBF： 100,000 hours 100,000hrs

plug and play | LCD | 7KW

choetech

Choetech Portable LED Display plug and play EV Charging Cable 16A 3.5KW

LED

Plug and play 3.5KW

Portable, plug and play




Product Parameters:

Model: 01.01.03.XX-ACG13-PS16AX-EU5-WH
Install： Portable, plug and play
Power Supply： AC power supply socket
Voltage(choose one only)： AC 240V
Current： 6A Min-10A Min-13A Min-16A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
MTBF： 100,000 hours 100,000hrs

plug and play | LED | 3.5KW

choetech

Choetech Portable LED Display plug and play EV Charging Cable 32A 7KW

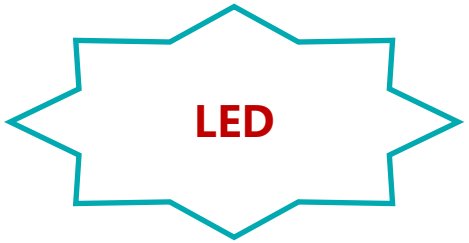

Plug and play 7KW

Portable, plug and play



Product Parameters:

Model: 01.01.03.XX-ACG13-PS32AX-EU5-WH
Install： Portable, plug and play
Power Supply： AC power supply socket
Voltage(choose one only)： AC 240V
Current： 6A Min-10A Min-13A Min-16A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
MTBF： 100,000 hours 100,000hrs

plug and play | LED | 7KW

Choetch 5M model 2 single phase 240V 32A 7kw

LCD screen EV Charger station

Model Name: EV006
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/240V
Current:6A Min-10A Min-16A Min Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,groundin
protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 7KW
Adaptor cable length: 0.9meter
EV charger cable: 5meter



7KW Max	240V EU adaptor	8A,10A,13A,16A,32A adjustable

Choetch 5M model 2 single phase 250V 32A 7kw

LED EV Charger

Model Name: EV007
Dimension(L*M*H):Control Box:185*90*49mm,Device cable:5M or customized
Install: Portable,plug and play
Power supply: AC power supply socket
Voltage(chooes one only):AX220V/120V/208V/250V
Current:6A Min-10A Min-16A Min Max
Frequency:50Hz or 60Hz
Safety Protection: Leakage current,under and over voltage,frequency ,current,high temperature,grounding protection and lightning protection
Enclosure:IP65
Operating temperature: -30°C-+50°C
Stroage temperature: -40°C-+80°C
MTBF:100000H
Standers(choose only one): GB/T20234.2-2015,GB/T 18487.1-2015 or EVSE J1772 oR iec61851-1 2010
Control Principle
Output power: 7KW
Adaptor cable length: 0.9meter
EV charger cable: 5meter



7KW Max	250V EU adaptor	32A

choetech

Choetech Smart home Electric Vehicle (EV) Charger 220V single phase 7KW 32A

Plug and play 7KW



Product Parameters:

Model: EV010
Install： wall mounting type
Power Supply： AC power supply socket
Voltage(choose one only)： AC 220V
Current： 6A Min-10A Min-13A Min-32A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
Cavity size: 369*238*135MM

32A | support Wifi and APP | 7KW

Choetech Smart home Electric Vehicle (EV) Charger 380V three phases 11KW 16A

Plug and play 11KW



Product Parameters:

Model: EV011
Install： wall mounting type
Power Supply： AC power supply socket
Voltage(choose one only)： AC 380V
Current： 6A Min-10A Min-13A Min-16A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
Cavity size: 369*238*135MM

three phases | support Wifi and APP | 11KW

Choetech Smart home Electric Vehicle (EV) Charger 380V three phases 22KW 32A

Plug and play 22KW



Product Parameters:

Model: EV012
Install： wall mounting type
Power Supply： AC power supply socket
Voltage(choose one only)： AC 380V
Current： 6A Min-10A Min-13A Min-32A Min Max
Frequency： 50Hz Or 60Hz
Safety Protection:Leakage current; under and over voltage, frequency, current; high temperature; grounding protection and lightning protection
Enclosure： IP55
Operating Temperature： -30℃~+50℃
Storage Temperature： -40℃~+80℃
Cavity size: 369*238*135MM

three phases | support Wifi and APP | 22KW

choetech

Choetech 12V car emergency start power supply supports 5.0 displacement gasoline vehicles and 3.0 displacement diesel vehicles



Product Parameters:

Model: TC0016

Capacity: 8000mAh

Charging voltage: 5V/3A (type-C)

Output voltage: 5V/3A/9V/2A/12V/1.5A 12V car start

Starting current/peak current: 300A-600A

Charging time: 3 hours

Product size: 230*52*75mm

Product weight: 530g

Product packaging size: 270*140*95mm

Ambient temperature: -20℃～80℃/-4℉~120℉

Cycle life: more than 1000 times

Protection circuit: anti-overcharge, anti-overdischarge, 30mV quiescent current, to ensure the lowest self-consumption of the machine

powerful ability

Supports 5V tablet computer charging

12V/10A DC port supports car refrigerator power supply

choetech

Choetech Car emergency start power supply



Product Parameters:

Model: TC0017

Capacity: 8000mAh

Charging voltage: 5V/3A (type-C)

Output voltage: 5V/3A/9V/2A/12V/1.5A 12V car start

Starting current/peak current: 300A-600A

Charging time: 3 hours

Product size: 195*45*110mm

Product weight: 830g

Package size: 220mm X 180mm X 87mm

Ambient temperature: 20℃～80℃/-4℉~120℉

Cycle life: more than 1000 times

Protection circuit: anti-overcharge, anti-overdischarge, 30mV quiescent current, to ensure the lowest self-consumption of the machine

powerful ability

Supports 5V tablet computer charging

Built-in air pump function, support real-time inflation of car tires

choetech


7200mAh car jump starter



Product Parameters:

Model	TC0018
Interface	type-c
Capacity	7200mAh(26.64wh)
Battery Type	Polymer Batteries
Input (type-c)	5V/2A
Output(USB-A1)	5V/2.1A
Output (USB-A2)	5V/1A
Jump current	400A, peak current 800A max
Material/Color	V0 Anti-fire PC/Black
Dimension	145.7*85*26mm
Certification	FCC, CE, RoHS, PSE

car jump starter | outdoor type goods | 7200mah capacity

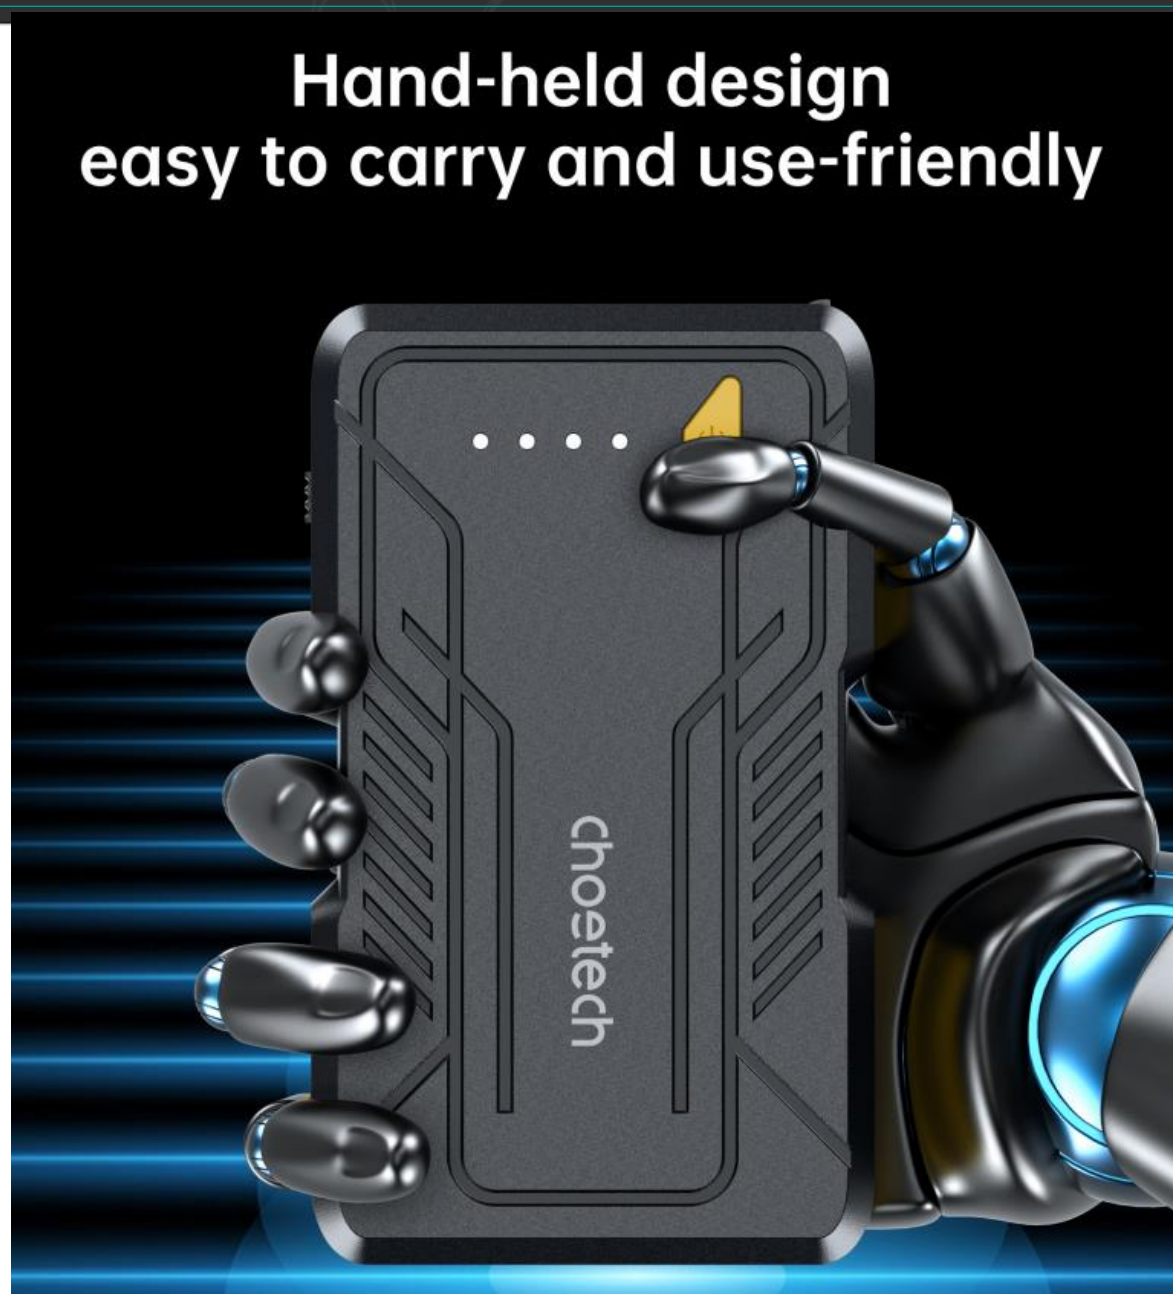

choetech

Wall Charger





choetech

USB-A 12W Charger



Product Parameters:

Model	Q5002
Material	Anti-fire ABS + PC, Fire rating V0
Interface	USB-A
Input	AC 100-240V, 50/60Hz, 0.5A
Output	5V/2.4A
Total Power	12W (Max)
Plug Available	CN, US, JP, EU, AU, UK
Certifications	CE, ETL, FCC, ROHS, RCM, PSE, 3C
Color: black/ white	

stable charging | USB-A port | 12w fast charging for mobile



choetech

QC3.0 18W USB Charger



Product Parameters:

Model	Q5003
Material	Anti-fire ABS + PC, Fire rating V0
Interface	USB-A
Input	AC 100-240V, 50/60Hz, 0.5A
Output	3.6-6V~3A, 6-9V~2A, 9-12V~1.5A
Total Power	18W (Max)
Plug Available	CN, US, JP, EU, AU, UK
Certifications	CE, ETL, FCC, ROHS, RCM, PSE, 3C

Qualcomm Technology | USB-A port | 18w fast charging for mobile



choetech **Best Seller**

PD20W charger for iphone12/13 series



Product Parameters:

Model	Q5004
Material	Anti-fire ABS + PC, Fire rating V0
Interface	Type-C
Input	AC 100-240V, 50/60Hz, 0.5A Max
Output	5V~3A; 9V~2.22A; 12V~1.67A
Total Power	20W (Max)
Plug Available	CN, US, JP, EU, AU, UK
Certifications	CE, ETL, FCC, ROHS, DOE VI, CCC, PSE, SAA

PD technology | Tyepe-c PD 20w output | Fast charging for Iphone 12/13 series



choetech

PD20W charger for iphone12/13 series





Product Parameters:

Model	PD2008
Material	Anti-fire ABS + PC, Fire rating V0
Interface	Type-C
Input	AC 100-240V, 50/60Hz, 0.5A Max
Output	5V~3A; 9V~2.22A; 12V~1.67A
Total Power	20W (Max)
Plug Available	KR
Certifications	CE, ETL, FCC, ROHS, DOE VI, CCC, PSE, SAA

PD technology | Tyepe-c PD 20W output | Fast charging for Iphone 12/13 series

choetech **Best Seller**

Dual A+C PPS PD33W For iPhone12/13/14.15 Samsung serise





Product Parameters:

Model Name: PD5006
Product specifications-output：
USB: 5V4.5A/5V3A/9V3A/12V 2.5A/15V 2A/20V 1.5A 30W Max
TPYE C: 5V3A/9V3A/10V 2.25A/12V 2.5A/15V 2A/20V 1.5A PD30W Max
TYPE C+USB: 5V4.5A
USB A: PPS 3.3V-11V=3A(Max 33W)
Power 33W; A+C
Product pins China; America; Europe; British regulations
Existing certification CE; FCC; CCC; ROHS

Single A or Single C 30W Max | GaN Tech | PPS 33W Max

choetech **Best Seller**

Choetech Single Type-C PD30W For iPhone12/13/14



Product Parameters:

Model Name: PD5007

input 100-240v 50/60HZ 0.8A

output 5V3A/9V3A/12V 2.5A/15V 2A/20V 1.5A


Power 30W; Single C

Existing certification CE; FCC; CCC; ROHS

Single A or Single C
30W Max

GaN Tech

Super mini

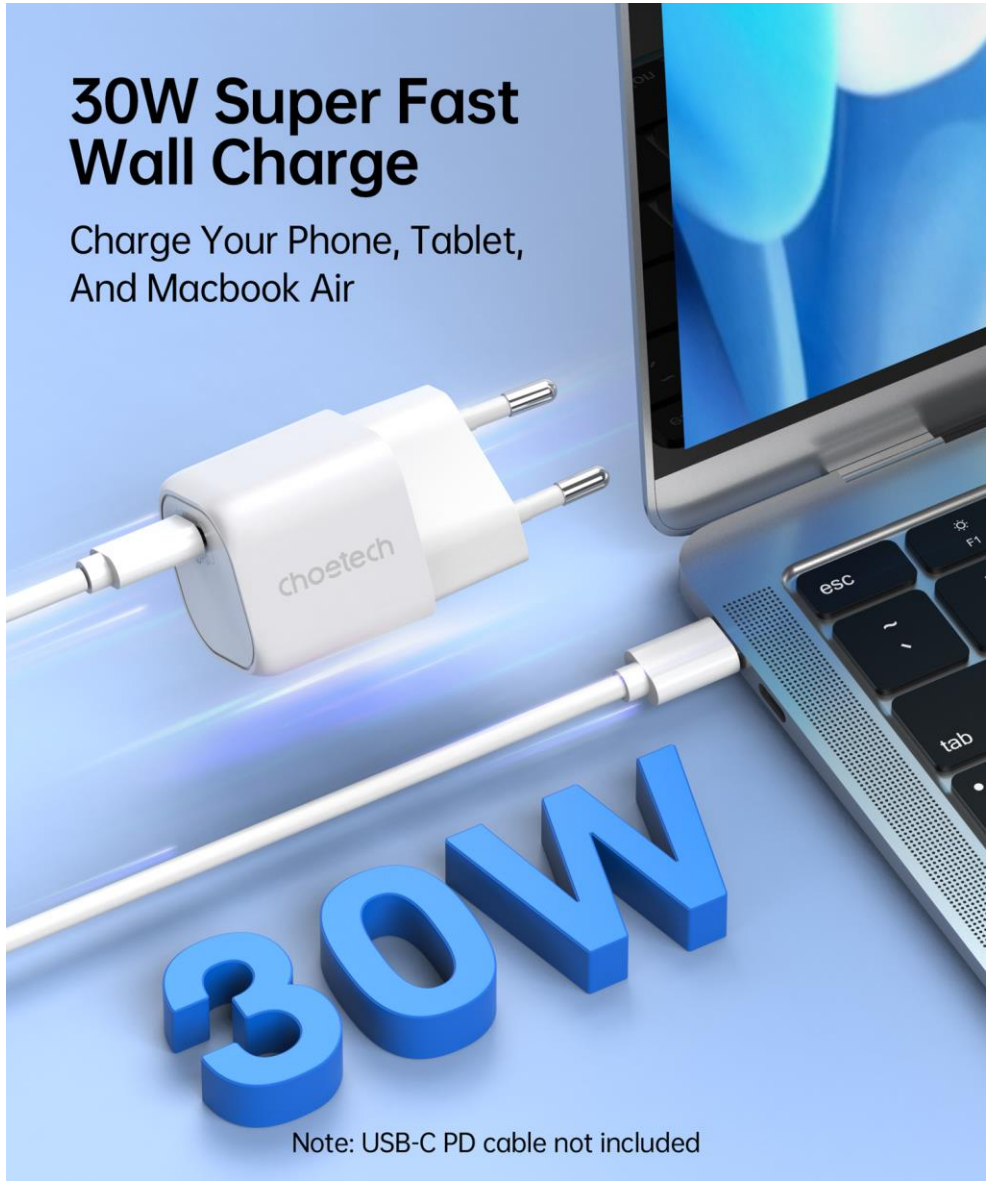

choetech **Best Seller**

Mini PD20W GAN USB-C Wall Charger





Product Parameters:

Model Name: PD5010
Material: ABS
Interface: type-c
output: DC 5V=3A, 9V=2.22A, 12V=1.67A
Power 20W
Existing certification CE; FCC; CCC; ROHS
Version: US, JP, EU, UK, AU, KR

PD20W charging | mini size | PPS 20W, PD20w charging

choetech **New Arrivals**

Mini PD20W GAN USB-C Wall Charger

Product Parameters:

Model Name: PD5010-V2
Material: ABS
Interface: type-c
output： DC 5V=3A, 9V=2.22A, 12V=1.67A
Power 20W
Existing certification CE; FCC; CCC; ROHS
Version: US, JP, EU, UK, AU, KR



PD20W charging | mini size | GaN 3.0

choetech **New Arrivals**

Mini PD30W GAN USB-C Wall Charger

Product Parameters:

Model Name: PD5010-V3

Input 100-240v 50/60HZ 0.8A

output 5V3A/9V3A/12V 2.5A/15V 2A/20V 1.5A

Power 30W; Single C

Existing certification CE; FCC; CCC; ROHS



PD30W charging | mini size | GaN 3.0

choetech **New Arrival**

GaN PD3.0 2C 45W wall charger





Product Parameters:

Model:PD5011
Input voltage:AC100-240V; 50-60Hz,1A Max
PD Output 45W*2: 5V/3A, 9V/3A,12V/3A/15V 3A/20V 2.25A
C1+C2=25W+20W
Size:50.5*50.5*31.5MM

PD45W charging | mini size | PPS 45W, PD45W charging

choetech **Best Seller**

Dual type-c PD35W wall Charger





Product Parameters:

Model Name: Q5008
Material: ABS
Interface: type-c*2
Input: AC 100-240V, 50-60Hz, 1.0A max
output C1, C2： DC 20V=1.75A, 15V=2.33A,12v=2.29A; 9V=3A, 5v=3A
Total Power 35W
Existing certification CE; FCC; CCC; ROHS
Version: US, JP, EU, UK, AU, KR
Portoel: PD, QC, AFC

PD35W charging	dual type-c	PPS 20W, PD20w charging

choetech **Best Seller**

Choetech Dual Type-c PD40W wall Charger



Product Parameters:

Model Name: Q5006
Output: USB-C1/2: 40W (5V3A 9V3A 12V3A 15V2.5A 20V2.0A
PPS:3.3-11V3A PPS:3.3V-21V2.0A)
C1+C2 dual port: intelligent distribution 35+5 or 20+20 or 25+15W

Single PD40W charging	Dual type-c	PPS 20W, PD20w charging



choetech

Choetech Dual Type-c GaN PD65W wall Charger



Product Parameters:

Model：PD6013
1. Input: AC 100~240V, 50/60Hz 1.5A max
2.C1/C2 Output:PD 65W 5V 3A,9V 3A,12V 3A,15V 3A,20V 3.25A
C1+C2=45W+20W

Single PD65W charging	Dual type-c	C1+C2=45W+20W



choetech

Choetech GaN 130W 1A+3C 4-Ports Wall Charger





Product Parameters:

Model: PD6001
Interface: USB-C
Input: 100-240V;50-60Hz AC 2.0A Max
Output: 130W (max) 3USB-C+USB-A
Color : White
Size: 70*86*31mm
Material: PC VO
Certificate: TUV, CE, FCC, ROHS, PSE, RCM

Choetech Exclusive model

3C+1A output ports | GaN Tech 130W | LED lighting display

choetech **Best Seller**

Choetech GaN 140W 2C+2A GaN Wall Charger



Product Parameters:

Model:PD6005

USB-C1：5V/3A，9V/3A，15V/5A，20V/5A，28V/5A（140W Max）；

USB-C2：5V/3A，9V/3A，15V/5A，20V/5A，28V/5A（140W Max）；

USB-A1:5V/3A，9V/2A，12V/1.5A（18W Max）；

USB-A2:5V/3A，9V/2A，12V/1.5A（18W Max）；

USB-C1+USB-C2：65W+65W （130W Max）；

USB-C1/USB-C2+USB-A1:100W+18W（Max);

USB-C1/USB-C2+USB-A2:100W+18W（Max);

USB-A1+USB-A2:12W+12W（Max)

USB-C1+USB-C2+USB-A1+USB-A2:65W+45W+12W+12W(Max）；

Total Output:140W(Max)

140W Max | 2C+2A | GaN Tech



choetech **New Arrival**

CHOETECH 3C1A 140W GaN wall charger

Product Parameters:


Model:PD3016
1.Input: AC 100-240V,50-60Hz,3A Max
2.Output: Type-C1/C2:5V3A, 9V3A, 12V3A, 15V3A, 20V5A,28V5A(Max140W)
3.Type-C3:5V3A,9V3A,12V2.5A, 15V2A ,20V1.5A(Max 30W)
4.USB-A:5V3A ,9V3A 12V2.5A ,15V2A ,20V/1.5A(Max 30W)
Type:C1+C2:70W+70W
Type:C1+C3:100W+30W
Type:C1+C2+C3:65W+45W+30W
Type:C1+USB-A:100W+30W
Type:C2+(C3+USB-A):100W+18W
Type:C1+C2+(C3+USB-A):65W+45W+18W
Total:140WMax
Size:67*64*31mm(US Plug)



PD140W charging | 3C1A | PPS 140W, PD140w charging

choetech

6-Port 1C+5A 68W Charing Station

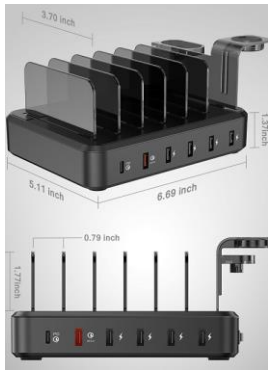

Product Parameters:

Model	Q3008
Material	Anti-fire ABS + PC
Interface	6*USB, 1*DC
Input	AC 100V~240V, 50-60Hz
Output	Type-c: DC 5V=3A, 9V=2.22A, 12V=1.67A PD20W QC3.0: 5V/3A, 9V/2A, 12V/1.5A, 18W Another 4 USB Port Output: DC5V 9A, 45W Total 68W
Product Size	160*122*70mm
Color	Black
Length	Power Charging Cable Length: 1.5m; USB Cable Length: 175mm

6*USB-A ports | 45w output power | perfect mobile/ipad slot design

68W

PD20w+QC18W+4USB



choetech **New Arrival**

7-Port 4C+2A 120W Charing Station

Power Delivery 3.0 + Qualcomm Quick Charge 3.0





Product Parameters:

Model	Q3009
Material	Anti-fire ABS + PC
Interface	2*USB, 4*DC
Input	AC 100V~240V, 50-60Hz
Output	Type-c1,2: PD65W Type-c 3, 4: PD45w USB-A 4,5: 5V/3A
Total	120W
Color	Black
Length	Power Charging Cable Length: 1.5m; USB Cable Length: 175mm

7 ports | 120w output power | perfect mobile/ipad slot design

choetech

2*USB-A Ports Wall Charger with Digital Display



Product Parameters:

Model	C0028
Material	Anti-fire PC
Interface	2*USB-A
Input	100-240V/0.3A
Output	Single Port Output: 5V/2.2A (Max)
Total Power	5V/3A
Protocol	
Certification	CE, FCC, ROHS
Plug Available	EU/US

2*USB-A ports | charging current display | 5V/3A output

Dual USB Ports

Equipped with 2 USB output ports, it simultaneously recharges your phone, table, power bank etc.



choetech

5V/2A USB Wall Charger



Product Parameters:

Model	C0029
Material	Anti-fire ABS+PC
Interface	2*USB-A
Input	AC 100-240V - 50/60Hz 0.3A Max
Output	5V/2A (Max)
Total Power	10W(Max)
Protocol	
Certification	US: FCC, UL, RoHS & VI EU: CE, RoHS & VI
Plug Available	EU/US

USB-A ports | carry easier | 5V/2A output



choetech

2*5V/2A USB Wall Charger



Product Parameters:

Model	C0030
Material	Anti-fire ABS+PC
Interface	2*USB-A
Input	AC 100-240V - 50/60Hz 0.3A Max
Output	5V/2A (Max)
Total Power	10W(Max)
Protocol	
Certification	US: FCC, UL, RoHS & VI EU: CE, RoHS & VI
Plug Available	EU/US

2*USB-A ports | carry easier | 5V/2A output



choetech

PD20W+QC18W Charger for iPhone12/13 Series



Product Parameters:

Model	PD5002
Material	Anti-fire ABS + PC, Fire rating V0
Interface	Dual Type-C port
Input	AC 100-240V 50/60Hz 1.0A MAX
Output	USB-C Output1: DC 5V=3A, 9V=2.22A, 12V=1.67A USB-A Output 2: 5V/3A, 9V/2A, 12V,1.5A
Total Power	38W (Max)
Compatible protocol	PD3.0 QC3.0 Apple-2.4A, AFC,FCP
Plug Available	US, JP, EU, AU, UK, KR
Certifications	TUV（UL62368）, CE, FCC, ROHS, PSE,CB

A+C ports | Iphone fast charging adaptor | Samsung fast charging adaptor



choetech

PD100W GaN dual USB-C Charger



Product Parameters:

Model	PD6008
Material	Anti-fire ABS + PC
Interface	2 x USB-C
Input	AC 100-240V 50/60Hz 2.5A（Max）
Output	USB-C 1: DC 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-5A (100W Max)
USB-C 2: DC 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-5A (100W Max)	
Total Power	100W (Max)
Protocol	PD3.0, QC3.0, Apple-2.4A
Certifications	TUV, CE, FCC, ROHS, PSE, DOC IV
Available Plug US/JP/CN/EU/UK/AU	

GAN technology | 100w signle port high power | Support charging for tablet



choetech

Dual PD20W USB-C Charger for iPhone 12



Product Parameters:

Model	PD6009
Material	Anti-fire ABS + PC, Fire rating V0
Interface	Dual Type-C port
Input	AC 100-240V 50/60Hz 1.0A MAX
Output	USB-C Output1/2: DC 5V=3A, 9V=2.22A, 12V=1.67A（20W）
Total Power	40W (Max)
Compatible protocol	PD3.0 QC3.0 Apple-2.4A, AFC,FCP
Plug Available	US, JP, EU, AU, UK, KR
Certifications	TUV（UL62368）, CE, FCC, ROHS, PSE,CB

Dual type-c ports | 2*PD20w design | iPhone 12 fast charging adaptor



choetech **Best Seller**

PD65W GAN mini A+C wall charger



Product Parameters:

Model	PD6011
Material	Anti-fire ABS + PC
Interface	1 x USB-C; 1-USB-A
Input	AC 100-240V 50/60Hz 1.4A (Max)
Output	Type-C：PD 65W output:5V 3A,9V 3A,12V 3A,15V 3A,20V 3.25A USB-A: 5V/3A 9V/3A 12V/3A 20V/2.25A A+C: 45W+ 10.5W
Total Power	65W (Max)
Protocol	PD3.0, PPS, QC3.0, Apple-2.4A
Dimension	88*45*14.2*13.5mm
Available Plug	US/JP/CN/EU/UK/AU
Certifications	UL, CE, FCC, ROHS, PSE, DOC IV

PD65w output | Ultra thin | Replacable plugs



choetech **Best Seller**

PD35W GAN Dual type-C Display wall charger





Product Parameters:

Model	PD6051
Material	Anti-fire ABS + PC
Interface	1 x USB-C; 1-USB-A
Input	AC 100-240V 50/60Hz 1.2A (Max)
Output	Type-C1/C2： 5V/3A,9V/3A,12V/2.91A,15/2.33A,20V/1.75A C1+C2: 5V/3.4A
Total Power	35W (Max)
Protocol	PD3.0, PPS, QC3.0, Apple-2.4A
Dimension	43*40*32mm
Available Plug	US/JP/CN/EU/UK/AU
Certifications	UL, CE, FCC, ROHS, PSE, DOC IV

PD35w output | Dual type-c | display function

choetech **Best Seller**

PD35W GAN A+C Display wall charger



Product Parameters:

Model	PD6052
Material	Anti-fire ABS + PC
Interface	1 x USB-C; 1-USB-A
Input	AC 100-240V 50/60Hz 1.2A (Max)
Output	Type-C： 5V/3A,9V/3A,12V/2.91A,15/2.33A,20V/1.75A,35W USB-A: 30W C+A: 5V/3.4A
Total Power	35W (Max)
Protocol	PD3.0, PPS, QC3.0, Apple-2.4A
Dimension	43*40*32mm
Available Plug	US/JP/CN/EU/UK/AU
Certifications	UL, CE, FCC, ROHS, PSE, DOC IV



PD35w output | A+C ports | display function

choetech

PD65W GaN Mini Fast Charger



Product Parameters:

Model	PD8002
Material	Anti-fire ABS + PC
Interface	1 x USB-C; 1 x USB –A
Input	AC 100-240V 50/60Hz 1.4A (Max)
Output	USB-C: DC 5V-2.4A, 9V-3A, 12V-3A, 15V-3A, 20V-3.25A (65W Max) USB-A: DC 5V-2.4A (12W Max)
Total Power	65W (Max)
Protocol	PD3.0, QC3.0, Apple-2.4A
Available Plug	US/JP/CN/EU/UK/AU
Certifications	TUV, CE, FCC, ROHS, PSE, DOC IV

A+C ports | GAN technology | Support charging for tablet



Choetech PD45W Wall Charger



Product Parameters:

Model: PD8007
Input: 100-240V ~ 50/60Hz 1.1A Max
Output: 5.0V- 2.4A(12.0W) or 9.0V- 3.0A(27.0W) or
12.0V -3.0A(36.0W) or 15.0V-3.0A(45.0W) or
20.0V- 2.25A (45.0W Max)
PPS : 3.3-11.0V-4.05A(45.0W Max)
Total:45.0W Max

GAN technology | Type-c 45w output | Support charging for tablets



choetech

Choetech PPS PD100W Charger Dual Type-C+ Single USB-A



Product Parameters:

Model: PD8005
USB-C port: PD3.0, PPS, QC2.0, QC3.0, FCP, AFC, AP2.4, BC1.2;
(C1:PPS3.3-21V5A; C2:PPS3.3-21V3A)
USB-A port: QC3.0-Class-B, SCP, AFC, FCP, AP2.4, BC1.2
Total:100W Max

GAN Technology | Type-c 100w output | Support charging for tablets



choetech

PD60W USB-C Charger



Product Parameters:

Model	Q4004
Material	Anti-fire ABS + PC, Fire rating V0
Interface	Type-C
Input	AC 100-240V, 50/60Hz, 1.5A Max
Output	DC 5V~3A, 9V~3A, 12V~3A, 15V~3A, 20V~3A
Total Power	60W (Max)
Certifications	CE, ETL, FCC, ROHS, DOE VI, CCC, PSE, SAA
Plug Available	CN, US, JP, EU, AU, UK

Adjustable plugs | Single type-c 60w output | Support charging for tablet



choetech

3 Port USB wall charger with digital display



Product Parameters:

Model	Q5009
Material	Anti-fire ABS + PC, Fire rating V0
Interface	3 x USB-A
Input	100~240V, 50/60Hz, 0.4A Max
Each USB Output	5V/2.4A Max
Total Output	5V/3.4A Max
Plug Available	UK/EU/US
Certifications	CE, FCC, RoHS

3*USB-A ports | Charging current display | 5V/3.4A output



choetech

PD61W USB-C Mini GaN Charger



Product Parameters:

Model	Q6006
Material	Anti-fire ABS + PC
Interface	USB-C
Input	AC 100-240V; 50/60Hz; 1.5A
Output	DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A, 20.3V/3A
Total Power	61W (Max)
Protocol	PD3.0 QC3.0 Apple-2.4A
Certification	TUV, CE, FCC, ROHS, PSE
Plug Available	US/EU/UK/JP

GAN technology | Type-c 61w output | Support charging for tablets



choetech **New Arrival**

GaN 70W 4 Ports Desktop Charger



Product Parameters:

Model：PD8019
100W Desktop GaN charger
Input: AC 100V-240V, 50/60 hz, 1.8A Max
Output:
USB-C1/C2: 5V3A 9V3A 12V3A 15V3A 20V3.5A
USB-A1/A2: 5V3A 9V3A 12V3A 15V3A 20V3.5A
C1+C2: 45W+20W
C1+A1/A2：45W+18W
C2+A1/A2: 5V3.6A
C1+ (C2+A1+A2): 45W+5V3.6A
Power total: 100W Max

GAN technology | 70W output | Desktop version



choetech **New Arrival**

GaN 100W 4 Ports Desktop Charger



Product Parameters:

Model：PD8008
100W Desktop GaN charger
Input: AC 100V-240V, 50/60 hz, 1.8A Max
Output: USB-C1 20V=5.0A
USB-C2 USB-C1 20V=5.0A
USB-A1 12V=1.5A
USB-A1 12V=1.5A
Power total: 100W Max

GAN technology | 100W output | Desktop version



choetech **New Arrival**

GaN 167W 6 Ports Desktop Charger

Product Parameters:

Model：PD8030
Input / Input:100-240V~50/60Hz 2.0A Max.
Output:C1 5V=3A, 9V=3A, 12V=3A, 15V=3A, 28V=5A
Output:C2 5V=3A, 9V=3A, 12V=3A, 15V=3A, 28V=5A
Output:C3 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A
Output:C4 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A
Output:A1 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Output:A2 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Total Output:47W+30W+30W+30W
Size: 140*84*32mm
Safety certification / Safety: CB, CCC, ETL, PSE, FCC, CE, UKCA, SAA, BSMI, ERP, DOE



GAN technology | 167W output | Desktop version

choetech **New Arrival**

GaN 207W 6 Ports Desktop Charger

Product Parameters:

Model：PD8031
Input / Input:100-240V~50/60Hz 2.5A Max.
Output / Output:C1 5V=3A, 9V=3A, 12V=3A, 15V=3A, 28V=5A
Output / Output:C2 5V=3A, 9V=3A, 12V=3A, 15V=3A, 28V=5A
Output / Output:C3 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A
Output / Output:C4 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A
Output / Output:A1 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Output / Output:A2 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Total Output:67W+47W+30W+30W+5V=4.5A
Size / Size:140*84*32mm



GAN technology | 207W output | Desktop version

choetech **Best Seller**

Chotech PD30W 3A+C Travel Travel Wall Charger





Product Parameters:

Model Name: PD5008
Single Output :
USB-C:5V-3A, 9V-3A, 12V-25A/15V-2A, 20V-1.5A
Dautle Output:
US8-C : 5V-3A, 9V-2A, 12V-1.5A
US8-A:5V-2.4A
Compatible version: US, EU, UK, AU

PD30W Max	AU+US+EU+UK	Multi-gauge charger

choetech **Best Seller**

Chotech PD65W 2C+A Travel Travel Wall Charger



Product Parameters:

Model Name: PD5009
Output: 11V/3A,5V/9V/12V/15V-3A,20V-3.25A(65W Max)
USB-C2 Out:3.3-11V/3A,5V/9v/12V/15V-3A,20V-3.25A(65W Max)
USB-A Out:4.5V/5A,5V/4.5A,9V/3A,12V/2.5A,20V/1.5A(30W Max)
USB-C1+USB-C2:45W+18W(63W Max)
USB-C2+USB-A:5V/3A(15W Max)
USB-C1+USB-C2+USB-A:45W+5V/3A(60W Max)
Total Out:65W Max

PD65W Max | AU+US+EU+UK | Multi-gauge charger



choetech

Chotech PD100W 2C+2A Travel Wall Charger





Product Parameters:

Model Name: PD6028
Output:
USB-C1/C2: 5.0V-3.0A,9.0V-3.0A,15.0V-3.0A,20.0V-5.0A(100W Max)
USB-A1/A2: 5.0V-3A,9.0V-2.0A,12.0V-1.5A（18W Max）
USB-C1+USB-C2:65W+35W(100W Max)
USB-A1+USB-A2:5.0V-3.0A(15W Max)
USB-C1+USB-A1/A2：65W+18W（83W Max）
USB-C2+USB-A1/A2：20W+18W（38W Max）
USB-C1+USB-C2+USB-A1/USB-A2：65W+20W+18W103W Max）
USB-C1+(USB-A1+USB-A2)： 65W+15W (80W Max）
USB-C2+(USB-A1+USB-A2)： 20W+15W (35W Max）
USB-C1+USB-C2+(USB-A1+USB-A2)：65W+20W+15W（100W Max）
Total Output/:100W(Max）
Product Size: 93.5*55*54mm

PD100W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech PD20W C+A Travel Wall Charger



Product Parameters:

Model Name: PD6040
Input: 100-240v@50-60Hz, 0.8A
Material: Anti-PC
Output:
Max Power：10A 250V 2500W
USB output：20W max
USB-A:5V-3A,9V-2.22A,12V-1.67A
USB-C:5V-3A,9V-2.22A,12V-1.67A
USB output：5V~3A max
Total Output/:20W(Max）
Product Size: 38.4x46.4x64.8mm

PD20W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech PD30W C+2A Travel Wall Charger



Product Parameters:

Model Name: PD6041
Input: 100-240v@50-60Hz, 0.8A
Material: Anti-PC
Output:
USB output：30W MAX
USB-C Output:3.3~11V-2.5A
5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A
USB-A Out:5V-3A/9V-3A/12V-2.5A
USB-C+USB-A Out:5V-3A Max
MAX.Power：880W at 110V~ , 1840W at 230V~
Product Size: 54.7×74x52.7mm

PD30W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech PD35W 2C+3A Travel Wall Charger



Product Parameters:

Model Name: PD6042
Conversion socket: 2USB-A+2type-c
Material: high quality flame retardant PC
USB output: 35.5W max
PD35 output:3.3-16V~2.2A
PD35 output:5V/9V~3A,12V-.91A,15V~2.33A,20V~1.75A
USB-C output:5V~3AMAX,
Single USB-A:5V~2.4A,MAX 3.1A
MAX.Power: 880W at 110V~, 1840W at 230V~
Size:54.7×76x52.7mm

PD35W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech PD20W 1C+1A Travel Wall Charger



Product Parameters:

Model Name: PD6043
Max Power：10A 250V 2500W
USB output：20W max
USB-A:5V-3A,9V-2.22A,12V-1.67A
USB-C:5V-3A,9V-2.22A,12V-1.67A
USB output：5V~3A max
Size:38.4x46.4x64.8mm
1.5x1.8×2.6in

PD20W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech PD20W 1C+1A Travel Wall Charger





Product Parameters:

Model Name: PD6044
USB output：20W max
USB-A:5V-3A,9V-2.22A,12V-1.67A
USB-C:5V-3A,9V-2.22A,12V-1.67A
USB output：5V~3A max
Size: 25x42x70mm
1×1.7x2.8in

PD20W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech PD45W 2C+2A Travel Wall Charger



Product Parameters:

Model Name: PD6045
Input: 100-240v@50-60Hz, 0.8A
Material: Anti-PC
Output:
Max Power:880W at 110V~ , 1840W at 230V~
USB output：45W max
Single Output:PD:5V-3A/9V-3A/12V-3A/15V-3A/20V-2.25A
Double Output:PD:5V-3A/9V-3A/12V-2.5A/15V-2A/20V-1.5A
USB-C:5V-3A/USB-A:5V-2.4A
Product Size: 54.7×78.2x52.7mm

PD45W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech 17W 2C+2A Travel Wall Charger





Product Parameters:

Model Name: PD5026
Travel Adapter with 2 USB + 2Type-C
MaxPower:1000W at 100V~,2400W at240V~
USB-C Output 5V-3A
USB-AOutput 5V-2.4A
Total Output: 5V-3.4A Max

PD17W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech 35.5W Travel Wall Charger





Product Parameters:

Model Name: PD5027
PD 35 Output:3.3-16V-2.2A
PD 35 Output:5V/9V-3A12V-2.91A,15V-2.33A,20V-1.75A
USB-C Output:5V-3A MAX,Single USB-A:5V-2.4A,MAX 3.1A
Total Output:35.5W MAX
MAX Power:1100Wat100V~ 2400W at 240V~

PD35.5W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech 70W Travel Wall Charger



Product Parameters:

Model Name: PD5028
70W GaN TRAVEL ADAPTER
Max Power:1000W at100V-2400W at 240V~
USB-C1 Out:3.3-11V-5A(PPS)/5V/9V/2V/15V-3A,20V-3.5A
USB-C2/C3 Out-5V-3A(15W Max),USB-A1/A2 Out-5V-2.4A
USB-C1+USB-C2/C3/A1/A2 Out:45W+15W(60W Max)
USB-C2+USB-C3/A1/A2 Out-5V-3A(15W Max)

PD70W Max | AU+US+EU+UK | Multi-gauge charger



choetech **New Arrival**

Chotech 35W Travel Wall Charger with inside cable





Product Parameters:

Model Name: PD5020
35W GaN Universal travel charger
with USB-C cable
Input:100-240V~50/60Hz　0.8A Max.
C1 Output：5V/3A,9V/3A,12V/2.91A,15V/2.33A,20V/1.75A
C2 Output：5V/3A
A1/A2 Output：5V/2.4A
Total Output：35W（Max)

PD35W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech 45W Travel Wall Charger with inside cable





Product Parameters:

Model Name: PD5021
45W GaN Universal travel charger
with USB-C cable
Input:100-240V~50/60Hz　0.8A Max.
C1 Output：5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A
C2 Output：5V/3A
A1/A2 Output：5V/2.4A
Total Output：45W（Max)

PD45W Max | AU+US+EU+UK | Multi-gauge charger

choetech **New Arrival**

Chotech 70W Travel Wall Charger with inside cable






Product Parameters:

Model Name: PD5022
input:100-240V~50/60Hz　1.2A Max.
C1 Output：5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A
C2 Output：5V/3A,9V/3A,12V/3A,15V/3A,20V/3.5A
A1Output：5V/3A,9V/3A,12V/2.5A,15V/2A,20V/1.5A
A2 Output：5V/1A
Total Output：70W（Max)

PD70W Max | AU+US+EU+UK | Multi-gauge charger

choetech

Car Charger

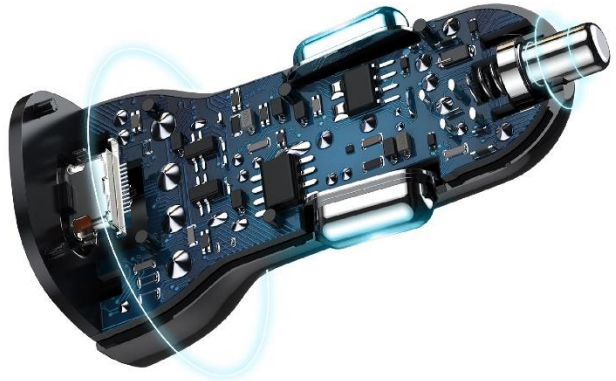



choetech **Best Seller**

QC3.0 18W + PD20W Car Charger



Product Parameters:

Model	TC0005-V2
Material	Anti-fire PC+Fire rating V0
Interface	1*USB-A 1*USB-C
Input	DC 12V-24V
Output	USB-C(PD3.0): 5.0V/3A, 9V/2.22A, 12V/1.67A USB-A(QC3.0):3.6V-6.5V/3A,6.5V-9V/2A,9-12V/1.5A
Total Power	38W(Max)
Protocol	PD3.0, QC3.0, QC2.0,APPLE 2.4A
Certification	CE, FCC, RoHs, ETL

A+C ports | PD20W + QC18W | Support fast charging for Iphone 12/13 series



choetech **Best Seller**

30W PD +QC Fast Car Charger with Hook



Product Parameters:

Model	TC0006
Material	Aluminium Alloy
Interface	1*USB-C; 1*Type-c
Input	DC 12V-24V
Output	USB-A: 4.5V/5A, 5V/4.5A, 9V/3A, 12V/2.5A Type-C: 5V//3A, 9V/3A, 12V/2.5A, 15V/2A. 20V/1.5A
Total Power	5V/5A
Protocol	USB-A: Apple-2.4A/QC3.0/QC2.0/Samsung-AFC-9V/Huawei-FCP-9V/Huawei-SCP-4.5V-5A Type-C: PD3.0/Apple-2.4A/QC3.0/QC2.0/Samsung-AFC-9V/Huawei-FCP-9V
Certification	CE, FCC, RoHs, ETL

A+C ports | USB-A 30w for Huawei fast charging | Metal housing



choetech **Best Seller**

40W Dual USB-C Fast Car Charger



Product Parameters:

Model	TC0008
Material	Anti-fire PC+Fire rating V0
Interface	2*USB-C
Input	DC 12V-24V
Output	USB-C(PD3.0)x2: 5V/3A, 9V/2.22A, 12V/1.67A
Total Power	40W
Protocol	Type-C: PD3.0/Apple-2.4A/QC3.0/QC2.0/Samsung-AFC-9V/Huawei-FCP-9V
Certification	CE, FCC, RoHs, ETL

Dual type-c ports | Dual PD20w | Support fast charging for Iphone 12/13 series



choetech

QC 3.0 Dual Ports 36W Car Charger



Product Parameters:

Model	C0051-V5
Material	Anti-fire PC+Fire rating V0
Interface	2*USB-A
Input	DC 12V-24V
Output	USB-A (QC3.0) x 2: 3.6-6V/3A
Total Power	36W(Max)
Protocol	QC3.0/Apple-2.4A/QC2.0/Samsung-AFC-9V/HUAWEI-FCP-9V
Certification	CE, FCC, RoHs, ETL

Dual USB-A ports | Dual QC3.0 output | 36W Max



choetech

24W Dual Ports Car Charger



Product Parameters:

Model	C0053
Material	Anti-fire PC+Fire rating V0
Interface	2*USB-A
Input	DC 12V-24V
Output	USB-A 1: 5V-2.4A (Max); USB-A 2: 5V-2.4A (Max)
Total Power	5V3.1A
Protocol	Apple-2.4A
Certification	CE, FCC, RoHs, ETL

Dual USB-A ports | Dual QC3.0 output | 24W Max



choetech

Dual PD 40W Car Charger



Product Parameters:

Model	C0054
Material	Zinc alloy
Interface	2*USB-C
Input	DC 12V-24V
Output	5V=2.4A, 9V=2A, 12V=1.5A; 5V=2.4A, 9V=2.2A, 12V=1.5A
Total Power	40W
Protocol	Type-C: PD3.0/Apple-2.4A/QC3.0/QC2.0/Samsung-AFC-9V/Huawei-FCP-9V
Certification	CE, FCC, RoHs

Dual type-c ports | zinc alloy material | 40w output



choetech **Best Seller**

63W Dual USB-C 45w+ USB-A18w Fast Car Charger



Product Parameters:

Model TC0010
Material: aluminium alloy+silicone
Input: DC12-24V
Output: (A1 QC3.0 18W): 3.6-6.5V/3A, 6.5-9V/2A, and 9-12V/1.5A
Output: (USB-C PD3.0 45W): 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/2.25A
Total 63W output
Color: Black
Housing Material:aluminium alloy for body case plus Matte plastic pc fireproof for back case Product Size: 70*31mm
N.W.: 55gN.W.: 55g

dual type-c + A ports | 63w output | support tablet and laptop charging



choetech **Best Seller**

130W Dual USB-C+ USB-A Fast Car Charger



Product Parameters:

Model TC0011
Input: DC12-24V
Output: (A1 QC3.0 30W): 5V3A 9V3A 12V2.5A
Output: (USB-C#C2 PD3.0 30W): 5V3A 9V3A 12V2.5A
PPS(33W): 3.3-11V/3A
Output: (USB-C #C1 PD3.0 100W): 5V/3A 9V/3A,12V/3A, 15V/3A 20V/5A
PPS: (105W) 3.3-11V/3A, 3.3-21V/5A
C1+A1=100W+30W=130W
C1+C2=100W+30W=130W
A1+C2=24W Max A1+C2+C1=24W+100W=124W max Color: Black
Housing Material:aluminium alloy for body case plus Matte plastic pc fireproof for back case Product Size: 75*34*34mm
N.W.: 55g

dual type-c + A ports | 130w output | support tablet and laptop charging



choetech **Best Seller**

60W Dual USB-C+ USB-A Fast Car Charger



Product Parameters:

Model: TC0014
Input: DC12-24V
Output: (USB-C #1 30W): 5V3A 9V3A 12V2.5A
PPS<33W>: 3.3-11V3A
USB-A #2 30W: 5V3A 9V3A 12V2.5A
SCP4/5V 5A/5V 4.5A
Total Output: 60W (MAX)
Color: Black
Material: aluminium alloy+PC plastic PD30W:PPS/PD3.0/PD2.0 /QC4+/QC4/QC3.0/QC2.0/AFC/FCP/
Product Size: 62*33.5*35.5mm
N.W.: 28g

dual type-c + A ports | 60w output | support tablet and laptop charging



choetech

2 Sockets 2C+1A Cigarette Lighter Splitter



Product Parameters:

Model TC0020
Material: aluminium alloy+silicone
Input: DC12-24V/10A
Output: USB-C1 :5V⎓ 3A,9V⎓3A,12V⎓2.5A （30W Max）;
PPS:3.3-11V⎓3A
USB-C2:5V⎓3A,9V⎓2.22A,12V⎓1.67A （20W Max）;
USB-A: 5V⎓3A,9V⎓2A,12V⎓1.5A （18W Max）;
USB-C2+USB-A:5V⎓ 3A Max;
USB-C1+(USB-C2+USB-A):30W+15W (45W Max)
Car socket output*2:12-24V⎓108W-200W Max
Total 12-24V⎓108W-200W Max
Color: Black
Compatoible: PPS/PD3.0/PD2.0/QC3.0/FCP/SCP/Apple2.4A
Certification: CE、FCC 、ROHS

A+2C ports combination

2 Cigarette lighter splitter

support tablet and laptop charging

choetech

3 Sockets 2C+1A Cigarette Lighter Splitter





Product Parameters:

Model TC0021
Material: aluminium alloy+silicone
Input: DC12-24V/10A
Output: USB-C1 :5V⎓ 3A,9V⎓3A,12V⎓2.5A （30W Max）;
PPS:3.3-11V⎓3A
USB-A: 5V⎓3A,9V⎓2A,12V⎓1.5A （18W Max）;
USB-C2:5V⎓ 3A,9V⎓3A,12V⎓2.5A （30W Max）;
PPS:3.3-11V⎓3A
USB-C1+USB-C2+USB-A:30W+30W+18W （78W Max)
Car socket output*2:12-24V⎓108W-200W Max
Total 12-24V⎓108W-200W Max
Color: Black
Compatoible: PPS/PD3.0/PD2.0/QC3.0/FCP/SCP/Apple2.4A
Certification: CE、FCC 、ROHS

A+2C ports combination | 3 Cigarette lighter splitter | support tablet and laptop charging

choetech

160W PD3.1 Dual USB-C+ USB-A Fast Car Charger



Product Parameters:

Model TC0024
Input: DC12-24V
Output: (A1 QC3.0 30W): 5V3A 9V3A 12V2.5A
Output: TYPE-C1:5V/3A,9V/3A,12V/3A,15V/3A,20V/5A,28V/5A 140W (MAX)
TYPE-C2:5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A 65W(MAX)
USB-A: 5V/3A,9V/3A,12V/3A 36W (MAX)
Total output: 160W
Color: Black
Housing Material:aluminium alloy for body case plus Matte plastic pc fireproof for back case Product Size: 75*34*34mm
N.W.: 55g

2* USB-C and 1* USB-A | 140w PD3.1 charging | support tablet and laptop charging

choetech

PowerBank





choetech **New Arrival**

2000mAh Thinnest Power Bank



Product Parameters:

Model	B708
Capacity: 2000mAh	
Type-C Input: 5V/2A	
Wireless Charger:5W (Max)	
Total Output: 5W (Max)	
Material: aluminum alloy+ABS+PC	
Size: 95*65.5*5.5mm	
Available Color	Black
Certifications	FCC, CE, RoHS

Thinnest Size	2000 mah Capacity	5W



choetech **New Arrival**

5000mAh Thinnest Power Bank

Product Parameters:

Model	B709
Input USB-C: 5V=3A, 9V=2A, 12V=1.5A	
Output USB-C: 5V=3A, 9V=2.22A, 12V=1.67A	
Wireless output 15W Max	
Size: 145*68*11mm	
Bare metal: 123.5g	
Available Color	Black
Certifications	FCC, CE, RoHS



Thinnest Size	5000 mah Capacity	15W

choetech New Arrival

Thinnest PD20W Magnetic Fast Charging Power Bank 5000mah

Product Prameter:

Model: B706
Material: Aluminium alloy+ PC
Battery type: Polymer 5000mAh*1pcs
USB ports：Type-C *1
USB-C Input: 5V/3A 9V/2A 12V/1.5A(18W)
Type-C Output：5V/3A 9V/2.22A 12V/1.67A(20W)
Wireless Output：15w
Color：Black, white
Size: 102.8*65.8*8.8mm



5000 mah capacity | magentic charging for new iphone series | 8.8mm thin

choetech New Arrival

Thinnest PD20W Magnetic Fast Charging Power Bank 10000mah

Product Prameter:

Model: B707
Material: Aluminium alloy+ PC
Battery type: Polymer 10000mAh*1pcs
USB ports：Type-C *1
USB-C Input: 5V/3A 9V/2A 12V/1.5A(18W)
Type-C Output：5V/3A 9V/2.22A 12V/1.67A(20W)
Wireless Output：15w
Color：Black, white
Size: 102.8*65.8*14.3mm



10000 mah capacity | magentic charging for new iphone series | 14.3mm thin

choetech

MFi 5000mAh Power Bank for Apple Watch



Product Parameters:

Model	T315
Material	ABS + PC
Interface	Micro-USB, USB
Capacity	5000mAh
Input	5V/2A
Output	5V/1A (for Apple Watch); 5V/2.1A (for USB devices)
Product Size	100*80*60mm
Available Color	Black
Certifications	MFi, FCC, CE, RoHS, PSE

Can charge for 6 times | 2 in 1 power bank (iwatch and phone) | MFi certificates



choetech

MFi Wireless Charger for Apple Watch



Product Parameters:

Model	T313
Material	ABS + PC
Interface	Micro USB
Capacity	900mAh
Input	5V/1A
Output	5V/0.4A
Product Size	55*55*15mm
Available Color	White
Certifications	MFi (PPID: 211915-0192) CE, FCC, RoHS PSE

Charge for 2-3 times | Compatible with Apple Watch series | MFi certificates



choetech **Best Seller**

PD20W Magnetic Fast Charging Power Bank 5000mah



Product Prameter:

Model: B662
Status：Mass production
Battery type: Polymer 5000mAh*1pcs
USB ports：Type-C *1
USB-C Input: DC5V/2A
Type-C Output：DC 5V/2.4A
Wireless Output：5V/1A, 9V/1.1A（10W）
Color：Black, white or others OEM color
Materials：ABS+PC
Size: 94*64.5*14.8mm

10000 mah capacity | 20w max output, fast charging | Magnetic



choetech **Best Seller**

PD20W Magnetic Fast Charging Power Bank 10000mah

Prameter:

Model: B663
Capacity: 10000mah (Huami)
USB1: Compatible with QC3.0, AFC, FCP
4.75-5V/3A, 6.5-9V/2A, 9-12V/1.5A
FCP fast charge: 9V/2A
AFC fast charge: 9V/2A
Type C: compatible with PD3.0, QC3.0, AFC, FCP
5-6.5V/3.0A, 6.5-9V/2A, 9-12V/1.5A
FCP fast charge: 9V/2A
PD: 5V/3A /9V/2.2A/ 12V/1.5A
Wireless charging: 5W/7.5W/10W
USB1+Type C: 5V/3A max (two ports output at the same time, the output is 5V/3.0A)
When any two channels output at the same time, the output voltage drops to 5V standard output.
Product size: 112.2*68.5*18.2mm
Weight weight: about 211g



10000 mah capacity | 20w max output, fast charging | Magnetic

choetech

10000mAh MFI PD18W Power Bank(with cable)



Product Parameters:

Model	B688
Interface	1xUSB-C Input,1x USB-C Output,1 x Lightning Output
Capacity	10000mAh
Battery Type	1 x lithium polymer battery
Input	USB-C (QC3.0 18W): 5V-3A, 9V-2A
Output	USB-C (QC3.0/FCP/AFC 18W): 5V-3A, 9V-2A, 12V-1.5A
Lightning (PD3.0 18W)	5V-3A, 9V-2A
USB-C + Lightning	5V-3A Max
Protocol	PD3.0 QC3.0 Apple-2.4A FCP AFC
Material	ABS + PC, V0 Anti-fire
Color	Black
Certifications	ETL, CE, FCC, ROHS, PSE, MFI

10000 mah capacity | Lighting and type c output cable | MFi certificated



choetech **Best Seller**

Choetech PD45W 20000mAh power bank



Product Parameters:

Model B653
1) Material: ABS plastic + PC
2) Size: 80*22*185mm
3) Battery Type: 8*18650 battery
4) Capacity: 20000 mAh
5) Input:: Micro- 5V/2A
Type C: 5V/3A; 9V/2A; 15V/2A; 20V/1.5A, 30W max
Output: USB A: 5V/2.4A * 2, 5V/3.4A max
Type C: 5V/3A, 9V/3A, 15V/3A, 20V/2.25A, 45W max
Total 62W output
6) Color: Black
7) Certification: CE, FCC, Rohs, TUV

Multi charging por | 45w fast charging output | 20000 mah capacity



choetech **Best Seller**

22.5W Fast Charging Power Bank with Cable

Product Prameter:

Model: B654
Capacity：10000mAh
Input Micro：5V⎓2A、9V⎓2A
Input Type-C：5V⎓3A、9V⎓2A
Output USB-A1/Type-C：5V⎓4.5A、4.5V⎓5A、5V⎓3A、9V⎓2A、12V⎓1.5A
Output Type-C Cable：5V⎓3A、9V⎓2.2A、12V⎓1.5A
Output lighting Cable：5V-2A
Total Output：5V-3A
Net Weight：242g
Size：148*68*17.2mm





2 pcs of Cable Attached | 22.5W PD Fast Charging | 10000 mah capacity

choetech **Best Seller**

69600mAh PD + QC 70W with 10W Wireless Charging Power Bank



Product Parameters:

Model: B661
Capacity: 69600mah 253.08Wh
Input : 1-Solar 80W Max; 2-DC18-24V/4A ; 3-USB-C:5v/3A 9v/3A 12V/3A 15v/3A 20v/3A
Output: 1-DC: 12V/5A 16.5V/4A 20V/3.5A 24V/2A; 2-USB-C-1: 5V/3A 9V/3A 12V/3A 15V/3A 20V/3V; 3-USB-C -2: 5V/3A 9V/3A 12V/2.25A (pps:3.3v-11V/3A); 4-USB-A: 4.5V/5A 9V/2A 12V/1.5A; 5- Cigarette holder: 12V/15A ; 6-wireless charging: 10W"
Size(mm): 228*125*44mm
Weight: 1600g
Packing: 38.5*25.7*30CM 5pcs 11kg
color black
Battery type: ternary lithium
Material: high-strength ABS+PC fireproof material
LED light: constant white light, flashing orange light
Power display: 8 indicator lights
Power charging time: about 4.2 hours

PD+QC 18W | Fast charging output | 10000 mah capacity



choetech **Best Seller**

50000mAh PD + QC 65W Power Bank



Product Parameters:

Model: B664
Product name: 50000mAh 65W digital display fast charging power bank
Batteries: Polymer Batteries
Lithium battery energy: 50000mAh 185Wh
Input Micro: 5V-2A, 9V-2A, 12V-1.5A
Input Type-C: 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-3.25A
Output Type-C: 5V-3A, 9V-3A, 12V-3A, 15V-3A, 20V-3.25A
Output OUT1: 5V-3.4A
Output OUT2/OUT3: 5V-3A, 5V-4.5A, 4.5V-5A, 9V-2A, 12V-1.5A
Output OUT1+OUT2+OUT3+Type-C: 5V-4A
LED lights: three levels of dimming brightness
Net weight: 1119.7g
Product size: 75*75*138.6mm
Packing quantity: 20pcs/outer box; 10pcs/inner box
Outer box size: 510*510*225mm
Inner box size: 490*242*225mm

PD+QC 65W | Fast charging output | 500000 mah capacity



choetech **New Arrival**

5000mAh PD20W AC Input power bank



Product Parameters:

Model	B676
Material	ABS + PC, V0 Anti-fire
Capacity	5000mAh/3.6V
Interface	USB-C port+ usb-C cable
AC input	100~240V 50/60Hz 0.3A
Type-C input	PD 18W max (5V/2.5A、9V/2A、12V/1.5A)
USB-C port Output	PD 20W max (5V/3A、9V/2.22A、12V/1.67A).
USB-C cable Output	PD22.5W (max) (5V/4.5A，5V/3A、9V/2A、12V/1.5A)
Dimension	31.5*37.5*106m
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL， CB

support AC input | Type-C cable output | small size

choetech **New Arrival**

5000mAh PD20W AC Input power bank



Product Parameters:

Model	B677
Material	ABS + PC, V0 Anti-fire
Capacity	5000mAh/3.6V
Interface	USB-C port+ Lightning cable
AC input	100~240V 50/60Hz 0.3A
Type-C input	PD 18W max （5V/2.5A、9V/2A、12V/1.5A)
USB-C port Output	PD 20W max （5V/3A、9V/2.22A、12V/1.67A).
Lightning cable Output	PD 20W max （5V/2.4A、9V/2.22A、12V/1.67A)
Dimension	31.5*37.5*106m
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL， CB

support AC input | Lightning cable output | small size

choetech **New Arrival**

15000mAh PD30W AC Input power bank

Product Parameters:

Model	B678
Material	ABS + PC, V0 Anti-fire
Capacity	15000mAh/3.85V
Interface	USB-C +USB-A port; Lightning+type-C cable
AC input	100~240V 50/60Hz 0.3A
Type-C cable/port input	5V3A,9V3A, 27W(Max)
USB-C port Output	5V3A,9V3A，12V/2.92A，15V2.33A，20V1.75A， 35W(Max)
USB-A port output	5V3A,9V2A，10V2.25A，12V1.5A，22.5W(Max)
Type-c cable output	5V3A,9V3A，12V/2.92A，15V2.33A，20V1.75A， 35W(Max).
Lightning cable Output	5V2.4A,9V3A,27W(Max)
Dimension	85.2*85.2*32.8mm
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL， CB



support AC input | Lightning+type-C cable output | small size

choetech New Arrival

9600mAh PD20W AC Input power bank

Product Parameters:

Model	B679
Material	ABS + PC, V0 Anti-fire
Capacity	9600mAh/3.85V
Interface	USB-C +USB-A port; type-C cable
AC input	100~240V 50/60Hz 0.3A
Type-C input	5V/2.5A,9V/2A,12V/1.5A，18W(MAX)
USB-C port Output	5V/3A,9V/2.22A,12V/1.67A；20W(MAX)
USB-A port output	5V3A,9V2A，10V2.25A，12V1.5A，22.5W(Max)
Type-c cable output	5V2.4A，9V/2.22A,12V/1.67A；20W(MAX)
Dimension	55*110*30mm
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL， CB



support AC input | Type-C cable output | small size

choetech **New Arrival**

9600mAh 2-in-1 PD20W AC Input power bank



Product Parameters:

Model	B680
Material	ABS + PC, V0 Anti-fire
Capacity	9600mAh/3.85V
Interface	USB-C +USB-A port
AC input	100~240V 50/60Hz 0.3A
Type-C input	5V/2.5A,9V/2A,12V/1.5A，18W(MAX)
USB-C port Output	5V/3A,9V/2.22A,12V/1.67A；20W(MAX)
USB-A port output	5V3A,9V2A，10V2.25A，12V1.5A，22.5W(Max)
Apple watch output	1.5W max
Dimension	55*110*30mm
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL， CB

support AC input | Type-C cable output | Apple watch Magnetic charging

choetech **New Arrival**

20000mAh PD30W AC Input power bank

Product Parameters:

Model	B681
Material	ABS + PC, V0 Anti-fire
Capacity	20000mAh/3.85V
Interface	USB-C port; Lightning+type-C cable
AC input	100~240V 50/60Hz 0.3A
Type-C port input	5V3A,9V3A, 27W(Max)
USB-C port Output	5V/2.4A; 9V/3A; 27W Max
Type-c cable output	4.5V/5A, 5V/2.4A, 9V/2A, 12V/1.5A 22.5W Max.
Lightning cable Output	5V2.4A,9V3A,27W(Max)
Dimension	99.2*85.3*33.5mm
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL, CB



support AC input | Lightning+type-C cable output | small size

choetech **New Arrival**

15000mAh PD45W AC Input power bank



Product Parameters:

Model	B682
Material	ABS + PC, V0 Anti-fire
Capacity	20000mAh/3.85V
Interface	USB-C port; Lightning+type-C cable
AC input	100~240V 50/60Hz 0.3A
Type-C port input	5V3A,9V3A,12V3A 15V3A 20V2.25A 45W(Max)
USB-C port Output	5V2.4A,9V2A,12V1.5A 18W(Max)
Type-c cable output	5V3A,9V3A,12V3A 15V3A 20V2.25A 45W(Max)
Lightning cable Output	5V2.4A,9V3A,27W(Max)
Dimension	100*85.2*33mm
Color	White,Black
Certification	FCC, CE, RoHS, PSE,UL, CB

support AC input | Lightning+type-C cable output | small size

choetech **New Arrival**

25200mAh PD140W power bank





Product Parameters:

Model	B670
Capacity	25200mAh/3.6V
Interface	2xUSB-C ,1*USB-A
USB-C Input	PD100W
USB-C1 Output	PD140W 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A,28V 5A
USB-C2 Output	PD140W 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A,28V 5A
USB-A Output	22.5W 4.5V5A,5V4.5A,5V3A,9V2A,12V1.5A
Material	ABS + PC, V0 Anti-fire
Color	White,Black
Material/Color	V0 Anti-fire PC+ aluminium /Black
Certification	FCC, CE, RoHS, PSE,UL, CB

PD140W ports | LED display | 25200mah capacity

choetech **New Arrival**

10,000mAh PD30W Power Bank



Product Parameters:

Model	B701
Capacity: 10000mAh/3.85V	
Input Type-C1/C2: 5V3A, 9V2A, 12V1.5, 18W	
Output: Type-C/C2: 5V3A, 9V3A, 12V2.5A, 15V2A, 30W	
Output USBA: 5V3A, 9V2A, 10V2.25A, 12V1.5A, 22.5W	
Material	ABS + PC, V0 Anti-fire
Color	Black
Certification	FCC, CE, RoHS

PD30W ports | LED display | 10,000mah capacity

choetech **New Arrival**

20000mAh PD100W 2C1A power bank



Product Parameters:

Model	B702
Capacity	20000mAh/3.85V
Interface	2xUSB-C ,1*USB-A
Material	Alluminium alloy+PC
USB-C1/C2 Input	5V3A、9V3A、12V3A、15V3A、20V3.25A、65W
USB-C2 input	5V3A、9V3A、12V3A、15V3A、20V3A、60W

Output
USB-C1: 5V3A、9V3A、12V3A、15V3A、20V5A、100W
USB-C2: 5V3A、9V3A、12V3A、15V3A、20V3A、60W
TYPE-C1+USBA:100W+30W ; TYPE-C2+USBA:60W+30W
TYPE-C1+TYPE-C2:20W; TYPE-C1+TYPE-C2+USBA:20W+30W
Total 130W max
Color: Black
Certification: CE, ROHS, FCC, CB

PD100W output ports | LED display | small size

choetech **Best Seller**

CHOETECH 10000mAh LED display power bank for Mobile and Apple watch



Product Parameters:

Model	B695
Interface	Type-C+USB-A female port; type-c+lightning cable interface
Capacity	10000mAh/4.35V
Battery Type	Polymer Batteries
Input	Type-c：5V/3A, 9V/2A, 12V/1.5A PD18w
Output	Type-C: 5V/3A, 9V/2.23A, 12V/1.67A PD20w USB: 5V/3A, 9V/2A, 12V/1.5A QC3.0
Cable output	type-c/lightning: 5V/3A, 9V/2.23A, 12V/1.67A PD20w
Mobile magnetic output: 15W max	
Apple watch output: 2.5W max	
Material/Color	V0 Anti-fire PC/white, Black
Certification	FCC, CE, RoHS, PSE
Dimension	L113*W68.5*H17mm

2-in-1 for mobile and Apple watch | output cables | 10000mah capacity

choetech **New Arrival**

CHOETECH 20000mAh LED display power bank for Mobile and Apple watch



Product Parameters:

Model	B696
Interface	Type-C+USB-A+lightning female port; type-c+lightning cable interface
Capacity	10000mAh*2/4.35V
Battery Type	Polymer Batteries
Input	Type-c: 5V/3A, 9V/2A, 12V/1.5A PD18w Lightning: 5V/2.4A
Output	Type-C: 5V/3A, 9V/2.23A, 12V/1.67A PD20w USB: 5V/3A, 9V/2A, 12V/1.5A QC3.0
Cable output	type-c/lightning: 5V/3A, 9V/2.23A, 12V/1.67A PD20w
Mobile magnetic output: 15W max	
Apple watch output: 2.5W max	
Material/Color	V0 Anti-fire PC/white
Certification	FCC, CE, RoHS, PSE

2-in-1 for mobile and Apple watch | output cables | 20000mah capacity

choetech **New Arrival**

27000mAh 2*PD100W power bank



Product Parameters:

Model	B635
Interface	2*USB-A,2* type-c
Capacity	27000mAh (185wh)
Battery Type	Polymer Batteries: Grinder 5000mAh
Input (type-c)	5V3A,9V3A,12V3A,15V3A,20V5A; PD100w
Output 1 (type-c)	PD100w
Output2 (Type-c)	PD100W
Output A1,A2	5V/4.5A、9V/3A、12V/1.5A (22.5W max)
Total output	PD222.5W
Material/Color	V0 Anti-fire PC+ aluminium /Black
Certification	FCC, CE, RoHS, PSE,UL， CB

2*PD100W ports | LED display | 27000mah capacity

choetech **New Arrival**

Choetech PD22.5W Power bank 10000mAh





Product Parameters:

Model	B728
Material	ABS + PC
Interface	USB1, USB2, Type-C
Capacity	10000mAh
Input	Type-c： 5V/2.4A、9V/2.0A、12/1.5A
Output	USB1&USB2：5V/4.5A、9V/2.0A、12V/1.5A
	Type-c： 5V/3.0A、9V/2.22A、12V/1.67A
Available Color	Black
Product Size	149.5*67.4*15.5mm
Certifications	FCC, CE, RoHS

PD22.5W | Fast charging | 10,000 mah Capacity

choetech **New Arrival**

Choetech PD22.5W Power bank 20000mAh





Product Parameters:

Model	B729
Material	ABS + PC
Interface	USB1, USB2, Type-C
Capacity	20000mAh
Input	Type-c： 5V/2.4A、9V/2.0A、12/1.5A
Output	USB1&USB2：5V/4.5A、9V/2.0A、12V/1.5A
	Type-c： 5V/3.0A、9V/2.22A、12V/1.67A
Available Color	Black
Product Size	150*68*28mm
Certifications	FCC, CE, RoHS

PD22.5W | Fast charging | 20,000 mah Capacity

choetech **New Arrival**

Choetech PD22.5W Power bank 30000mAh

Product Parameters:

Model	B730
Material	ABS + PC
Interface	USB1, USB2, Type-C
Capacity	30000mAh
Input	Type-c： 5V/2.4A、9V/2.0A、12/1.5A
Output	USB1&USB2: 5V/4.5A、9V/2.0A、12V/1.5A
	Type-c： 5V/3.0A、9V/2.22A、12V/1.67A
Available Color	Black
Product Size	150*68*40mm
Certifications	FCC, CE, RoHS





PD22.5W | Fast charging | 30,000 mah Capacity

choetech **New Arrival**

Choetech PD22.5W Power bank 40000mAh





Product Parameters:

Model	B731
Material	ABS + PC
Interface	USB1, USB2, Type-C
Capacity	40000mAh
Input	Type-c： 5V/2.4A、9V/2.0A、12/1.5A
Output	USB1&USB2: 5V/4.5A、9V/2.0A、12V/1.5A
	Type-c： 5V/3.0A、9V/2.22A、12V/1.67A
Available Color	Black
Product Size	150*68.1*52.6mm
Certifications	FCC, CE, RoHS, PSE

PD22.5W | Fast charging | 40,000 mah Capacity

choetech **New Arrival**

Choetech PD65W Power bank 50000mAh





Product Parameters:

Model	B732
Material	ABS + PC
Interface	USB1, USB2, Type-C
Capacity	50000mAh
Input	overvoltage protection :13.87V
Static current :	65uA
Output	USB: 5V/4.5A, 9W/2.0A, 12V/1.5
Type-C:	5V/3.0A, 9V/2.22A, 127/1.67A
Available Color	Black
Product Size	150*68.1*64.6mm
Certifications	FCC, CE, RoHS, PSE

PD65W | Fast charging | 40,000 mah Capacity

choetech **New Arrival**

3-in-1 magnetic charger holder with 10000mAh battery



Product Parameters:

Model	B750
Battery Capacity:	10000mAh
Type-C Input:	5V/3A、9V/2A、12V/1.5A（18W）
Type-C output:	5V/3A,9V/2.22A,12V/1.67A, 20W
Wireless charger output:	15W Max
iwatch Wireless :	3W (Max)
Total Output：	15 Max



Power bank+wireless | ,mobile+Apple watch charging | foldable design

choetech **New Arrival**

3-in-1 magnetic charger holder with 10000mAh battery

Product Parameters:

Model	B751
Battery Capacity:	10000mAh
Type-C Input:	5V/3A、9V/2A、12V/1.5A（18W）
Type-C output:	5V/3A,9V/2.22A,12V/1.67A, 20w
Wireless charger output:	15W Max
Total Output：	15 Max





Power bank+wireless | ,mobile+Apple watch charging | 10,000 mah Capacity

choetech **New Arrival**

3-in-1 magnetic charger holder with 10000mAh battery

Product Parameters:

Model	B752
Battery Capacity:	8000mAh
Type-C Input:	5V/3A、9V/2A、12V/1.5A（18W）
Lightning Input:	5V/3A、9V/2A
Type-C/C cable output:	5V/3A,9V/2.22A,12V/1.67A
L cable output:	5V/3A,9V/2.22A
Wireless charger output:	15W Max
iwatch Wireless :	3W (Max)
Total Output：	15 Max



Power bank+wireless | mobile+Apple watch charging | Type-c+Lightning cable output

choetech **New Arrival**

3-in-1 magnetic charger holder with 10000mAh battery

Product Parameters:

Model	B753
Battery Capacity: 10000mAh	
Type-C Input: 5V/3A、9V/2A、12V/1.5A（18W）	
L Input:5V/3A、9V/2A	
Type-C/C cable output:5V/3A,9V/2.22A,12V/1.67A	
L cable output:5V/3A,9V/2.22A	
Wireless charger output:15W Max	
iwatch Wireless :3W (Max)	
Total Output： 15 Max	



Power bank+wireless | mobile+Apple watch charging | Type-c+Lightning cable output

choetech **New Arrivals**

Choetech 3-in-1 detachable magnetic wireless power bank



Product Parameters:

Model Name: B800 Plus
Item name: 5000mAh 3in1 Magnetic power bank
Capacity: 5000mAh
Type-C Input: 5V/3A、9V/2A、12V/1.5A
（18W)
Type-C output:5V/3A,9V/2.22A,12V/1.67A
Wireless charger output:15W Max
Earbud output：3W（Max）
Total Output：15 Max

choetech New Arrival

5000mAh magnetic charging power bank

Product Parameters:

Model Name: B802
Item name: 5000mAh 3in1 Magnetic power bank
Capacity: 5000mAh
Type-C Input: 5V/3A、9V/2A、12V/1.5A（18W）
Type-C output:5V/3A,9V/2.22A,12V/1.67A
Wireless charger output:15W Max
Total Output：15W Max



Power bank+wireless | mobile magnetic charging | 5000mAh small size

choetech **New Arrival**

3-in-1 5000mAh magnetic charging power bank



Product Parameters:

Model Name: B802 plus
Capacity: 5000mAh
Type-C Input: 5V/3A、9V/2A、12V/1.5A（18W)
Type-C output:5V/3A,9V/2.22A,12V/1.67A
Wireless charger output:15W Max
Earbud output：3W（Max）
watch output：2.5W（Max）
Total Output：15 Max



Power bank+wireless | mobile +Apple watch+earbuds charging | 5000mAh small size

choetech **New Arrival**

3-in-1 5000mAh magnetic charging power bank

Product Parameters:

Model Name: B803
Capacity: 5000mAh
Type-C Input: 5V/3A、9V/2A、12V/1.5A
(18W)
Type-C output:5V/3A,9V/2.22A,12V/1.67A
Wireless charger output:15W Max
Color: Black
Certification: CE, ROHS, FCC



Power bank+wireless | mobile magnetic charging | power bank+holder design

choetech


Empower Your World With Our Showcase
choetech
choetech
choetech
HIGH CAPACITY
12V LiFePO4
LFP Battery

choetech **Best Seller**

300W Portable Power Station

Product Parameters:

Model BS002-V2
Battery type: ternary lithium battery
AC output mode: pure sine wave
Battery energy: 281Wh
Rated output power: 300w peak 60ow
AC output: 110V/230V
Charging time: about 1.6 hours (dual-channel fast charge)
Car charger output: 12V/10A Max
DC output: 12V/8A Max
USB*4: 5V/2.4A*2QC3.0*2
Type-C (PD): 100W Max
Product size: 248*164*169mm
Product weight: 3.7kg
Working temperature: -10℃-40℃



300w max output, power storage | Multi port output | Wide range of application scenarios

choetech **Best Seller**

Choetech 500W Powerstation

Product Parameters:

Model: BS004

Capacity: 484Wh (134400mAh)

Battery Life Cycles 4000+

DC Input (DC6530): 12-30V/5A

USB-A Output: QC3.0 18W Max

4xUSB-A Output: 5V/2.4A

USB-C Output: PD3.0 100W Max

Car Port Output: 12V/10A

DC 12V Output (DC5521): 12V/10A

AC Output: 110V~230V 50/60Hz 500W(1000W Peak)

LED: 1W

Battery Type: ternary lithium battery 18650

Product size: L276mm*W177mm*H238mm (including handle)

Weight: 5.6KGs

Operate Temperature: -10℃ ~45℃



choetech **Best Seller**

Choetech 1200Wh Bidirectional charging power station

Product Parameters:



Model: BS005

Battery capacity: 960Wh (lithium iron phosphate)

Charging input: 700W fast charge, Anderson interface input 500W*1

AC output: 1200W rated output*6.2400W peak power

DC output: 12V/3A*2

Cigarette port output: 12V/15A*1

XT60 interface: 12V/25A*1

Type-C output: PD 100W*2

USB output: 5V/2.4A*2, QC3.0/18W*2 Accessories: packaging/instructions/charging cable



1200w max output, power storage | Multi port output | Wide range of application scenarios

choetech **Best Seller**

Choetech 2000Wh Bidirectional charging power station

Product Parameters:

Model: BS006
Battery type: LiFePO4
AC output type: pure sine wave
Capacity: 1997Wh
Output: 2000W
AC output: 110V/230V
AC charging time: About 2 hours
MPPT INPUT: About 5 hours (400W) 500W max
Car charger output: 12V/10A
XT60 output: 12V/10A
DC output*2: 12V/3A*2
USB*4: 5V/2.4A*2 18W*2
Type-C (PD)*2: 5-20V/5A, 100W Max
Product size: 386*275*306mm
Product weight: 22KG





2000w max output, power storage | Multi port output | Wide range of application scenarios

choetech **Best Seller**

Choetech 2400Wh Bidirectional charging power station

Product Parameters:

Model: BS008
Battery type: 40135LiFePO4
AC output type: pure sine wave
Input interface AC, DC(MPPT), Cigarette port
Output Interface 4x Type-C, 2x USB-A, 2 x 5521dc, Cigarette port , XT60
6* EU AC ports ,
Capacity: 2048Wh Output: 2400W
Cigarette output: 13.6V/10A
XT60 output: 12V/25A
DC output*2: 12V/3A*2
AC output: 100-120V/50-60Hz
USB-A1, A2: 5V/3A, 9V/2A, 12V/1.5A,18w max
Type-C *3: pd20W Max
Type-C *1: PD100W
Product size: 392*279*323mm
Product weight: 22.5KG



2400w max output, power storage | Multi port output | Wide range of application scenarios

choetech **Best Seller**

Choetech 3600Wh Bidirectional charging power station





Product Parameters:

Model: BS009
Battery type: 40135LiFePO4
AC output type: pure sine wave
Input interface AC, DC(MPPT), Cigarette port
Output Interface 4x Type-C, 2x USB-A, 2 x 5521dc, Cigarette port , XT60
6* EU AC ports ,
Capacity: 9840Wh Output: 3600W
Cigarette output: 13.6V/10A
XT60 output: 13.6V/25A
DC output*2: 12V/3A*2
AC output: 100-120V/50-60Hz
USB-A1, A2: 5V/3A, 9V/2A, 12V/1.5A,18w max
Type-C *3: pd20W Max
Type-C *1: PD100W
LED output: 3W
Product size: 584*320*464mm
Product weight: 31KG

3600w max output, power storage | Multi port output | Wide range of application scenarios

choetech **Best Seller**

Choetech 300Wh Power Station

Product Parameters:

Model: BS020
Battery: Battery capacity: 230.4Wh (19.2V/12000mAh)
Battery Model: Woo-Power 32700 6000mAh LFP 6S2P
Input: TYPE-C1 Input: 5V3A/9V3A/15V3A/20V3A 60W(MAX)
Output: AC output mode: pure sine wave
AC Output: 300W Max (peak power 600W)
EU/UK/CH/ZA/AU: 220V-240V 50/60Hz
US/JP: 100V-120V 50/60Hz
2. DC port rated output: 13.3V10A, 133W Max. DC port rated output: 13.3V10A, 133W Max.
3. USB1/USB2 rated output: 5V2.4A; USB1/USB2 rated Output: 5V2.4A;
Type-C2 rated output: 5V3A; Type-C2 rated output: 5V3A;
USB1/USB2/Type-C2 Total Output: 5V6A; USB1/USB2/Type-C2 Total Output: 5V6A;
4. Type-C1 rated output: 5V3A/9V3A/12V3A/15V3A/20V3A, 60W;
Type-C1 rated Output: 5V3A/9V3A/12V3A/15V3A/20V3A, 60W;
5. LED lighting 1W supports three-level brightness adjustment and SOS function;
LED lighting 1W supports three-speed brightness adjustment and SOS function;



300w max output, power storage | Multi port output | Wide range of application scenarios

Choetech 600Wh Power Station



Product Parameters:

Model: BS021
Specification / Parameters: 12.8V, 25000mAh, 320Wh
Output / output:
USB-A*2: 5V3A / 9V2A / 12V1.5A(Max 18W)
Type-C 1: 5V3A / 9V3A / 12V2.5A / 15V2A / 20V1.5A (Max 30W)
Type-C 2: 5V3A / 9V3A / 12V3A / 15V3A / 20V3A (Max 60W)
DC*2: 12V/10A
Cigarette Lighter: 12V10A
AC: 110V~60Hz, 300W (Waveform: Pure Sine Wave)
Input / input:
DC10.8-23.5V3A (60W Max)
Type-C 2: 5V3A / 9V3A / 12V3A / 15V3A / 20V3A (Max 60W



600w max output, power storage | Multi port output | Wide range of application scenarios

Choetech 1000Wh Power Station



Product Parameters:

Model: BS022
Battery capacity: 1024Wh (25.6V/40000mAh)
Battery model: A41008J (cell: GreatPower IFR40135 20Ah 8S2P)
DC1 InputDC1 Input: 12-24V/0-10A 180W(MAX)
Type-C InputType-C Input: 5V3A/9V3A/12V3A/15V3A/20V3A 60W(MAX)
DC1/Type-C total input DC1/Type-C total input: 240W(MAX)
AC output mode: pure sine wave
AC Output: 1000W Max (peak power 2000W)
EU/UK/CH/ZA/AU: 220V-240V 50/60Hz
US/JP: 100V-120V 50/60Hz
DC2/DC3/ciger socket Output DC2/DC3/Ciger socket Output :13.3V/10A 133W(MAX)
USB-A1/USB-A2/USB-A3 Output USB-A1/USB-A2/USB-A3 Output: 5V2.4A total Output 5V7.2A(MAX)
USB-C Output USB-C Output: 5V3A/9V3A/12V3A/15V3A/20V3A 60W(MAX)
LED lighting output LED lighting output: 3W(MAX)

1000w max output, power storage | Multi port output | Wide range of application scenarios

Choetech 2000Wh Power Station

Product Parameters:

Model: BS023
Battery capacity: 1920Wh (48V/40000mAh)
Battery model: GreatPower IFR40135 20000mAh 15S2P
1. DC1/Anderson interface rated input DC1/Anderson interface rated input: 12-65Vdc 10A650W (Priority access to the charging port for charging priority)
2. AC1 Rated Input AC1 RatedInput: 200-240Vac 1800W±200W MAX
3. DC1/Anderson interface/AC1 rated total input DC1/Anderson interface/AC1 rated total input: 1800W (AC1 charging priority)
AC output mode: pure sine wave
AC Output: Pure sine wave 2000W (continuous power) 4000W (peak power)
EU/UK/CH/ZA/AU: 220V-240V 50/60Hz
US/JP: 100V-120V 50/60Hz
3. DC3/DC4/cigarette lighter rated output DC3/DC4/Cigarette lighter ratedOutput: 13.3V/10A 133W
4. USB1-USB4 individual rated output USB1-USB4 IndividualratedOutput: 5V3A/9V2A/12V1.5A 18W
USB1-USB4 simultaneous total output USB1-USB4Simultaneous totalrated Output 5V 8A 40W
5. Type-C1 rated output Type-C1 rated Output: 5V3A/9V3A/12V3A/15V3A/20V5A 100W
6. Type-C2 rated output Type-C2 rated Output: 5V3A/9V3A/12V3A/15V3A/20V5A 100W



2000w max output, power storage | Multi port output | Wide range of application scenarios

choetech **New Arrival**

Choetech 600Wh UPS Portable Power Station

Product Parameters:

Model: BS030
Construction - Material: Plastic
Battery Capacity Wh: 512Wh(25.6V 20,000mAh)
Battery Cell Type : Li-ion Battery, LFP
AC input directly: 180W
DC (5525) input /DC 5525 "12-24V/10A 180W max
Support MPPT Solar Charging (PWM Type)"
Anderson input/ Anderson "12-24V/10A ,180W max
Support MPPT Solar Charging"
Remark for Charging input 180W Max
USB-A Outputs: 2*USB-A QC18W each
TYPE-C Outputs: 2*USB-C PD100W each
DC (5525) Outputs: 2* 13.3V/10A
12V Car Cigarette Lighter Output: 1 x 13.3V/10A
AC Output : 3 X OUTLET
Pure Sine Wave (230V / 50Hz)"
AC Sockets: South Africa Socket
"AC Continuous Output Power - Per Outlet": 600W
"AC Peak Output Power -
per Outlet": 1200W
UPS (10ms) Function YES
LED Flashlight with SOS function Yes, 3W
Display Mode LCD Screen Display
Control Button Mode POWER-ON/OFF for each port
Working Temperature "Discharge -10~40℃; Recharge 0~40℃"
Product Size 400*250*210mm
Product net Weight TBD
Accessories 1* 1m AC Cable



600w max output, power storage | UPS function | Wide range of application scenarios

choetech **New Arrival**

Choetech 1200Wh UPS Portable Power Station

Product Parameters:

Model: BS031
Construction - Material Plastic
Battery Capacity Wh 1024Wh (25.6V 40,000mAh)
Battery Cell Type Li-ion Battery, LFP
AC input directly 1200W
DC (5525) input /DC 5525 "9-65V/10A ,400W max
Support MPPT Solar Charging"
Anderson input/ Anderson "9-65V/10A ,400W max
Support MPPT Solar Charging"
Remark for Charging input 1200W
USB-A Outputs 2*USB-A QC18W each
TYPE-C Outputs 2*USB-C PD100W each
DC (5525) Outputs 2* 13.3V/10A
12V Car Cigarette Lighter Output 1* 13.3V/10A
AC Output "3 X OUTLET
Pure Sine Wave (230V / 50Hz)"
AC Sockets South Africa Socket
"AC Continuous Output Power -
Per Outlet" 1200W
"AC Peak Output Power -
Per Outlet" 2400W
UPS (10ms) Function YES
LED Flashlight with SOS function Yes，3W
Display Mode LCD Screen Display
Control Button Mode POWER-ON/OFF for each port
Working Temperature "Discharge -10~40℃； Recharge 0~40℃"
Product Size 400*250*260mm



1200w max output, power storage | UPS function | Wide range of application scenarios

choetech **New Arrival**

Choetech 2000Wh UPS Portable Power Station

Product Parameters:

Model: BS032
Construction - Material Plastic
Battery Capacity Wh 2048Wh (51.2V 40,000mAh)
Battery Cell Type Li-ion Battery, LFP
AC input directly 1800W
DC (5525) input /DC 5525 "9-65V/10A ,650W max
Support MPPT Solar Charging"
Anderson input/ Anderson "9-65V/10A ,650W max
Support MPPT Solar Charging"
Remark for Charging input 2000W Max
USB-A Outputs 2*USB-A QC18W each
TYPE-C Outputs 2*USB-C PD100W each
DC (5525) Outputs 2* 13.3V/10A
12V Car Cigarette Lighter Output 1* 13.3V/10A
AC Output "3 X OUTLET
Pure Sine Wave (230V / 50Hz)"
AC Sockets South Africa Socket
"AC Continuous Output Power -
Per Outlet" 2000W
"AC Peak Output Power -
Per Outlet" 4000W
UPS (10ms) Function YES
LED Flashlight with SOS function Yes,3W
Display Mode LCD Screen Display
Control Button Mode Independent ON/OFF of each Button
Working Temperature "Discharge -10~40℃; Charge 0~40℃"
Product Size 400*250*260mm



2000w max output, power storage | UPS function | Wide range of application scenarios

choetech **New Arrival**

Choetech 3000Wh Power Station



Product Parameters:

Model: BS015
Rated Capacity 2560Wh
Battery Capacity: 800k mAh, 3.2V
Service Life: 2000+ charge/discharge cycles
AC Charging Oower: 2400W
MPPT Charge Power: 800W
Type-C1 Output: PD100W
Type-C2 Output: PD100W
4*USB Output: QC3.0/AFC/FCP/18W
Cigarette Lighter Output: 12V/10A
DC 5521 Output: 12V/10A
AC Output 110V or 220V
Operating temperature range: charging(0℃~40℃)； discharging(-20℃~45℃)
Size(L*W*H):403*297*426mm
Weight: 29kg
Size(L*W*H): 524*424*586mm
Weight: 34kg

3000w max output, power storage | Multi port output | Wide range of application scenarios

choetech **New Arrival**

Choetech 5000Wh Power Station



Product Parameters:

Model: BS015
Rated Capacity: 5120Wh
Battery Capacity: 1600k mAh, 3.2V
Service Life: 2000+ charge/discharge cycles
AC Charge Power: 4000W
MPPT Charge Power 1600W
Type-C1 Output: PD100W
Type-C2 Output: PD100W
4*USB Output: QC3.0/AFC/FCP/18W
Cigarette Lighter Output 12V/10A
DC 5521 Output DC 5521 Output 12V/10A
AC Output 110V or 220V
Operating temperature range: charging(0℃~40℃)； discharging(-20℃~45℃)
Shell Material: Sheet-metal Spray Paint
Size(L*W*H): 520*410*480mm
Weight:72kg
Size(L*W*H): 670*500*700mm
Weight: 85kg

5000w max output, power storage | Multi port output | Wide range of application scenarios

choetech **New Arrival**

Choetech 3600W solid state battery portable power station

Product Parameters:

Model: BS045
Battery type: Lead-acil cell
AC output type: 4, total output power 3200W
Input interface AC, type-C, DC(MPPT)
Output Interface 4x USB-A, 2*type-C, 1*DC, Cigarette port , 4*AC ports ,
Capacity: 3.6KWh Output: 3200W
Rated battery capacity: 62 AH
Type-C Input: PD60W
Input mains fast charge: about 1.2 hours /3000w(max, configurable) full
Car charging: about 36 hours full (DC12V)/ about 18 hours full (DC24V)
Solar charging :200W about 20 hours full, 200W*2 about 13 hours full
DC output: supporting 12V/200W cigarette lighter interface
AC output: total 3200W
USB-A*4: 5V/3A
USB-C *2output: Fast PD65W
Product size: 449*236*336mm
Net weight: 23 Kg
Gross weight: 26kg



solid state battery | battery detachable | Wide range of application scenarios

choetech **New Arrival**

Choetech 1800W portable power station

Product Parameters:

Model: BS065
Battery type: lithium iron phosphate
Input interface: XT60, AC
Output Interface: USB-A QC3.0*2, Cigarette port, USB-C*2, AC
Capacity: 1.8KWh
Rated battery capacity: 20 AH



BS065

1800W Portable Power Station
With 2 External Battery Modules(1536Wh)
Expand to 6144Wh LiFePO4 Battery Backup
Solar Generator for Home Backup and Emergency

With UPS | Can be combined battery pack | LFP battery

choetech

Choetech 3600W portable power station

Product Parameters:

Model: BS066
shell material: ABS+PC
Battery type: Lithium iron phosphate 40135
AC output type: 110v*4+1 220v*3
Input interface : AC, solar charging, cigarette port*3, parallel port*2
Output Interface: AC, PD*6, QC*4, USB-A*2, Cigarette port, XT60*1 DC*2, Bypass switching, UPS, recharge the car battery, parallel port*2
Capacity: 3.6KWh
Rated battery capacity: 20 AH
AC Input: five gears: 400W,800W,1200W, 1600W,2200W
AC Input: 8 hours
Solar charging: 2400W(max) about 6 hours full
AC+solar input: 3.2 hours
Cigarette port input: 10A(120W)*3
AC output: US/JP: 100V-120V 50Hz/60Hz EU/UK: 230V 50Hz CH: 220V 50Hz KR: 220V 60Hz AUS: 240V 50Hz
AC: 110v*4+1, 220v*3
PD output: 100W*3 20W*3
QC output: 18W*4
USB-A output: 5v/2.4A*2
Cigarette port output: 12v/10A
XT60 output: 12v/25A*1
DC output: 12v//3A*2
UPS: 10ms
Product size: 550*321*464mm
Net weight: 42+36.5*2 Kg
Gross weight: 50+44.5*2kg



BS066

3600W Portable Power Station
With 2 External Battery Modules(3810Wh)
Expand to 11520Wh LiFePO4 Battery Backup
Solar Generator for Home Backup and Emergency and Emergency
Sturdy Pull-Handle & Roller Design

Portable | Parallel operation | Constant output power

choetech **New Arrival**

Choetech 600w portable power station

Product Parameters:

Model: BS050
600W AC inverter output, satisfy 80% applications
Inverter and Backup Batteris are separated
Backup batteries can be optional for end users
UPS function : Prevent devices from balckout in 15ms
Any 12V Lead Acid Batteries can be used as backup battery
Floodlight for lighting



inverter+battery | battery detachable | Wide range of application scenarios

choetech

HUB & HDMI Cable





choetech **Best Seller**

7 in1 HUB stand for tablets



Product Parameters:

Model name: HUB-M48

Interface: 1*USB-C Female,1*USB-C PD, 1*USB-C Data, 1*SD, 1*TF, 2*USB- A, 1*HDMI

Input: Type-C

Output: TYPE-C(PD3.0,PD100W charging)

Type-C (5Gbps transfer speed)

HDMI(4K@30Hz)

2*USB A(3.1,5Gbps transfer speed)

SD/TF+USB-C2.0*1 (data transfer)

Dimension: 24.75*266.2*55mm

Material: Aluminium Housing

7 in1 HUB stand | PD100W charging | For professional IT & Designer



choetech

6 in1 TYPE-C TO PD+HDMI+USB 3.0A/F*3+RJ45 Steam Deck dock station



Product Parameters:

Model name: HUB-M50

Interface: 1*USB-C female, 1 usb-c male,, 3*usb3.0, 1*HDMI, RJ45

Input: Type-C, PD100W

Output:

1*HDMI： 4K/60hz

1*USB-C：PD3.0, DC5-20V/5A

1*USB-A: USB3.1 gen 1, 5Gbps transmission

HDMI: 4K@60Hz

RJ45: 1000Mbps

Dimension: 78*168*28mm

Material: Aluminium Housing

for steam deck | PD100W charging | For professional IT & Designer



choetech **Best Seller**

14 in1 HUB dock station



Product Parameters:

Model name: HUB-M52

Interface: 3*USB-C PD, 1*USB-3.1, 2*usb3.0, 2*usb2.0, audio, VGA,DP, RJ45, 1*SD(micro), 2*HDMI

Input: Type-C

Output: 1*VGA：1080p/60hz

1*HDMI：4K/30hz

1*HDMI： 4K/60hz

1*DP： 4K/60hz

1*USB-C：PDUSB3.1 GEN2 10Gbps transfer speed（5V 1.5A）

1*USB-A: PDUSB3.1 GEN2 10Gbps transfer speed(5V 1.5A)

2*USB 3.0-A：PDUSB3.0 5Gbps

2*USB 2.0-A：PDUSB2.0 480Mbps


SD/TF:SD4.0，TF3.0，compatible SD/TF sync working

1*USB-C：PD 3.0 100W

Audio/MIC: support voice and micrphone

Dimension: 78*168*28mm

Material: Aluminium Housing

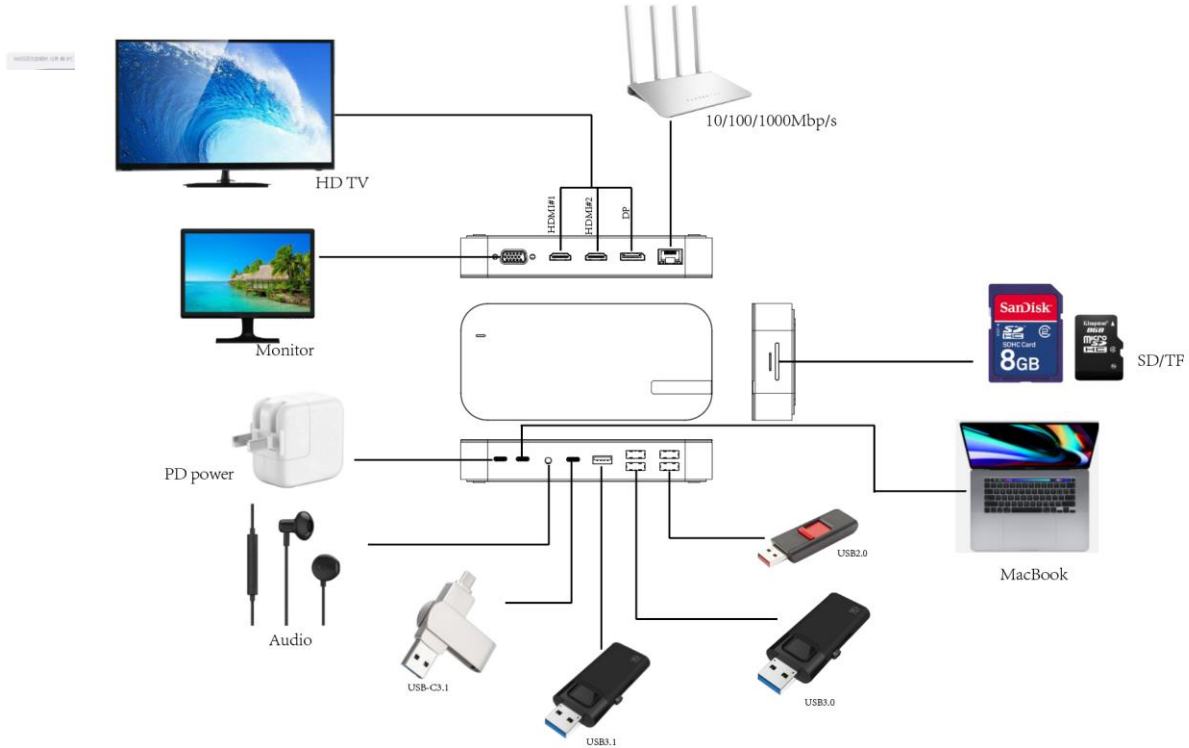

14 in1 HUB stand | PD100W charging | For professional IT & Designer

7in1 HUB stand Type-C to HDMI(4K/30Hz）/USB-A*2/TF&SD card with PD Charging







Product Parameters:

Model name: HUB-M43

Input: Type-C

Output: 2*USB-A: 5Gbps, 1.5A max+ USB-C: 5Gbps, 2.4A max+RJ45+HDMI+Type-C female: PD3.0 100W

Material: Aluminium Housing

7in1 HUB stand | PD100W output | For professional IT & Designer

choetech

9 in1 HUB stand Type-C to PD60W+HDMI+RJ45+3*USB A/F+SD/TF+USB-C2.0





Product Parameters:

Model name: HUB-M43-V1

Input: Type-C

Output: PD60W+HDMI+RJ45+3*USB A/F+SD/TF+USB-C2.0

6 LEVEL Adjustable

Material: Aluminium Housing

9 in1 HUB stand | PD60W output | For professional IT & Designer

choetech

2in1 HUB stand Type-C to HDMI(4K/30Hz）/USB-A*2/Type-C Data/SD/TF with PD Charging





Product Parameters:

Model name: HUB-M39

Input: Type-C

Output: HDMI2.0:4K@30Hz, 3xUSB3.0A: 5Gbps 1xUSB-C:5Gbps 1XType C PD3.0:100W

Input devices with type-cinterface for mobile phones, tablets, laptops.

Output devices for high-definition monitors, LCD TVs.

Support USB 3.0,USB2.0, compatible with IOS system, Windows7/8/10system.

Support HDMI(can connect large screen TV,projectorup to 3840*2160P/ 30Hzresolu-tion).

Supports PD charging(maximum charge of 20V/SA(100W) fast charge).

6in1 HUB stand | PD100W output | For professional IT & Designer

choetech **Best Seller**

High-tech Multifuncation USB docking station



Product Parameters:

Model：HUB-M21

Interface:USB3.0*4+USB_C*2(Host)+USB_C(PD3.0)+3.5mm+HDMI*3+VGA+RJ45+DC（26W)+USB_C(Data)

Material: Aluminum shell

Output: USB_C PD:100W

Display: HDMI--4K/30Hz　VGA--1080P/60Hz；HDMI&VGA--1080P/60Hz

Delivery speed: USB3.0/USB_C 3.0/SD/TF/ 5Gbps(SD/TF)

Color: Space gray

Weight: 614g

15in1 HUB docking | PD100W output | For professional IT & Designer



choetech **Best Seller**

11 in 1 USB-C Multiport Docking Station



Product Parameters:

Model	HUB-M20
Material	Aluminum shell
Interface	USB C to USB3.0*3+USB-C 3.0+USB-C PD(100W)+3.5mm+SD+TF+HDMI+VGA+RJ45
Resolution	Single Display: HDMI--4K/30Hz VGA--1080P/60Hz; HDMI + VGA HDMI & VGA--1080P/60Hz
USB-C PD	100W (Max)
Color	Space Gray
Certification	FCC,CE, RoHS

Design for macbook | 11 in 1, multi adapter, also can be used as laptop holder | Aluminum shell material



choetech

4-In-1 USB-C to HDMI Adapter





Product Parameters:


Model	HUB-M13
Interface	Type-C Male, Type-C Female, HDMI, Audio, USB-A
Material	Aluminium alloy + ABS
HDMI Resolution	4K@60Hz
Data Transmission(USB 2.0)	480 Mbps
Type-C （PD 3.0)	Charging Speed: 60W (Max)
Data Transmission	480Mbps
Protocol	DP Alt Mode
Certification	CE, FCC & RoHS
Support system	iOS 12 ,Apple OS X Yosemite, Apple OS El Capitan, Windows 10, Google Chrome OS, etc

Design for ipad and macbook | 4 in 1, multi adapter | Aluminum and abs material

choetech

4-In-1 USB-C to RJ45 Adapter



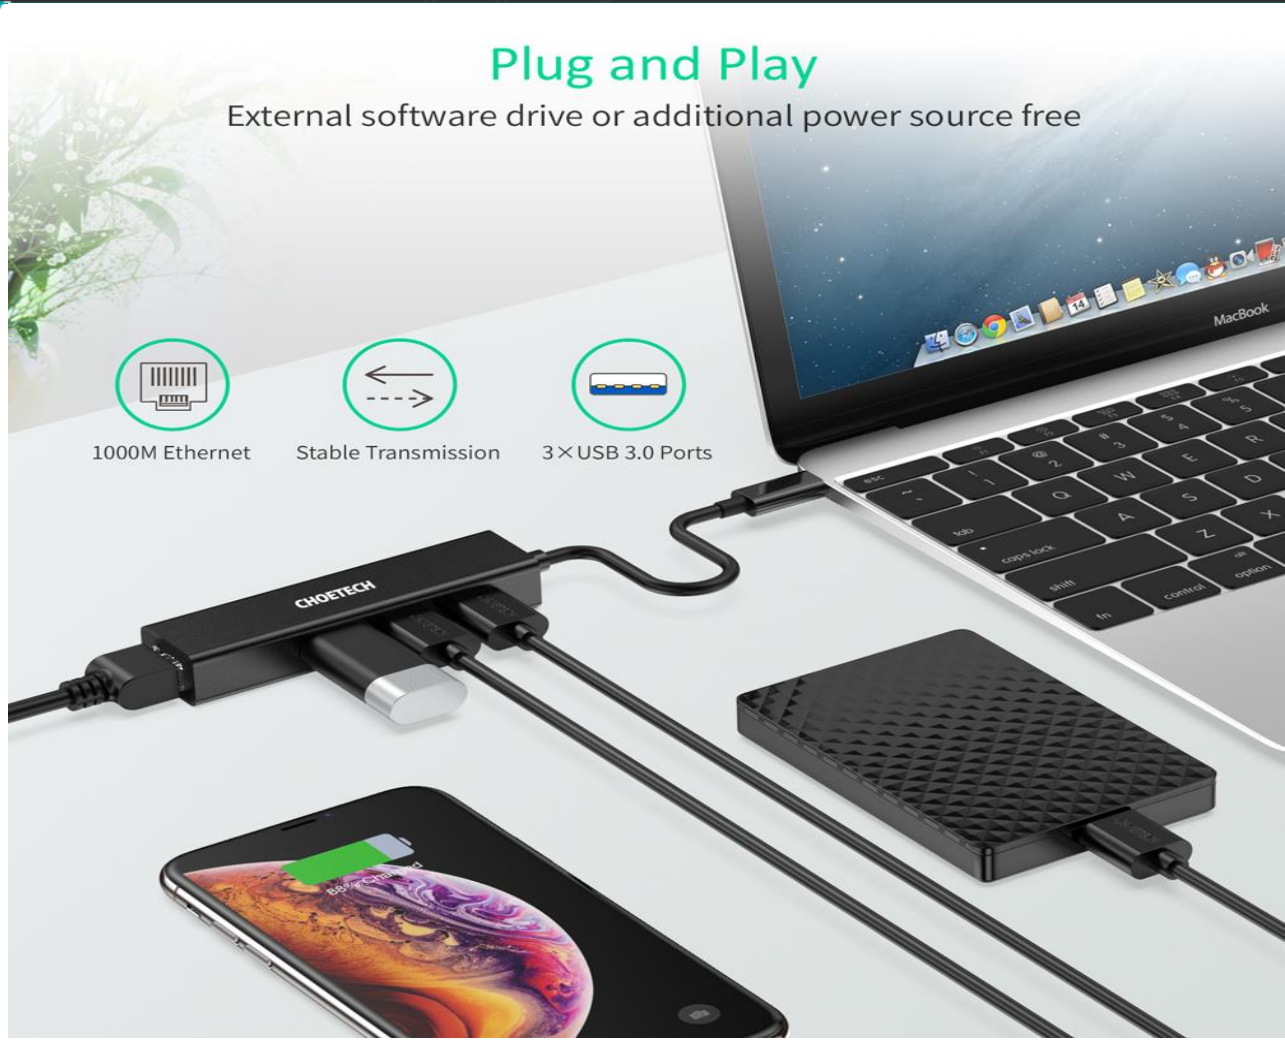

Product Parameters:

Model	HUB-U02
Material	Aluminum Alloy Shell + Gold-plated Connector
Interface	USB C, 3xUSB A, RJ45
Data Transmission(USB-A)	5Gbps
Network Speed	1Gbps
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC & RoHS

Design for ipad and macbook | 4 in 1, multi adapter | Aluminum alloy shell, gold-plated connector material

choetech

7-In-2 USB-C Multiport Adapter



Product Parameters:

Model	HUB-M14
Material	Aluminum Alloy
Interface Male	2*USB-C; Female: HDMI, TF, SD, 2*USB-C, 2*USB 3.0
Resolution	HDMI: 4K@30Hz
USB 3.0	5Gbps (Max.)
USB-C Thunderbolt 3 Mode	Support 40 Gbps, 5K 60Hz, PD 87W
USB-C Mode	Support 5Gbps data, PD 87W
Available Color	Space Grey
Protocol	DP Alt Mode
Certification	CE, FCC & RoHS



Design for macbook pro | 7 in 1, multi adapter, best seller of choetech | Aluminum and abs material

choetech **Best Seller**

7 in 1 Multiport HUB



Product Parameters:

Model	HUB-M19
Material	Aluminum shell
Interface	1 x USB-C, 1 x HDMI, 3 x USB 3.0, 1 x SD, 1 x TF, 1 x USB-C PD
HDMI Resolution	4K @ 30Hz (Max)
USB 3.0 Date Transmission	5Gbps (Max)
SD/TF Transfer Speed	5Gbps (Max)
USB-C PD Input	100W (Max)
Color	Space Gray
Certification	FCC,CE, RoHS

Design for macbook | 7 in 1, multi adapter | Aluminum shell material



choetech **Best Seller**

11 in1 HUB for MacBook/laptop

Product Parameters:

Model name: HUB-M26

Interface: USB C to2*HDMI+VGA+2*USB3.0+2*USB2.0+RJ45+PD+SD/TF+AUDIO

Input: Type-C

Output:

Chip VL103+VL817+RTD2142+SN75DP149+Ethernet port module (RTL8153/88179)

+FE1.1S/MA806/SL2.2S+reader module (GL3224/5306)+audio (SSS1530)

HDMI/F 4K/60HZ*1

HDMI/F 4K/30HZ*1

VGA/F 1080P/60HZ*1

MST/SST

USB3.0A/F 5G*2 0.9A(max)USB2.0A/F 2.0*2 0.5A(max)

RJ45*1

SD/TF*1

Audio/MIC

Material: Aluminium Housing



11 in1 HUB | PD100W charging | For professional IT & Designer

choetech **New Arrival**

15 in1 HUB And Docking

Product Parameters:

Model name: HUB-M28

Interface: 2*HDMI+VGA+2USB3.1+4USB3.0+PD+C+audio+RJ45+SD+TF

Input: Type-C

Output:

1*VGA: 1080p

1*HDM: 4K/30hz

1*HDM: 4K/60hz

1*USB-C: Support USB3.1 GEN2 10G transfer rate (5V 0.9A)

2*USB 3.1-A: Support USB3.1 GEN2 10G transfer rate (5V 0.9A)

1*USB 3.0-A : Support USB3.0 5Gbps transfer rate (5V 0.9A)

3*USB 2.0-A: Support USB2.0 480Mbps transmission rate (5V 0.5A)

RJ45: 1000M

SD/TF: (Support SD/TF simultaneous read and write operations (3.0)

1*USB-C: PD 3.0 supports a maximum input of 100W

Material: Aluminium Housing



15 in1 HUB stand | PD100W charging | For professional IT & Designer

choetech New Arrival

14 in1 HUB for MacBook/laptop

Product Parameters:

Model name: HUB-M29

Interface: 2*HDMI+DP+5*USBA+PD+USB-C+RJ45+AUDIO+SD/TF/Apple gray aluminum case

Input: Type-C

Output: 2*HDMI+DP+5*USBA+PD+USB-C+RJ45+AUDIO+SD/TF/Apple gray aluminum case

1*HDMI: 4K/60hz

1*DP: 4K/60hz

1*DP: 4K/60hz

3*USB 3.0-A: Support USB3.0 5Gbps transmission rate (5V 0.9A)

1*USB-C: Support USB3.1 10Gbps transfer rate (5V/0.9A)

1*USB 3.1-A: Support USB3.1 10Gbps transmission rate

1*USB 2.0-A: Support USB2.0 480Mbps(5V 0.5A)

RJ45: 1000M

SD4.0 rate, TF3.0 rate

USB-C: PD 3.0 supports a maximum input of 100W

Audio/MICMaterial: Aluminium Housing



14 in1 HUB | PD100W charging | For professional IT & Designer

choetech

7-in-2 USB-C Multiport Adapter



Product Parameters:

Model	HUB-M23
Material	ABS + Alloy Aluminum
Interface	2 x USB-C (Male), 1xSD, 1 x Micro SD, 3 x USB-A (USB 3.0), 1 x USB-C (Female), 1 x USB-A (USB 2.0)
Resolution	USB-C Thunderbolt 3: 5K@60Hz (Max)
Transfer Speed USB-C	40Gbps (Max)
SD/Micro SD	5Gbps (Max)
USB 3.0	5Gbps (Max)
USB 2.0	480Mbps (Max)
Product Size	125 x 33 x 10.8mm
Certification	FCC, CE, RoHS

Design for macbook pro | 7 in 1, multi adapter | Aluminum shell material



choetech

7-in-2 USB-C Multiport Adapter





Product Parameters:

Model	HUB-M24
Material	Aluminum shell
Interface	1 x HDMI, 2 x USB 3.0, 1 x USB-C, 1 x SD, 1 x Micro SD, and 1 x RJ45
Resolution	HDMI: 4K@30Hz (Max)
USB-C Thunderbolt 3	5K@60Hz (Max)
Transfer Speed (USB-C)	40Gbps (Max)
USB 3.0	5Gbps (Max)
SD/Micro SD	5Gbps (Max)
USB-C PD Input	100W (Max)
RJ45 Network Transmission	1000Mbps (Max)
Certification	CE, FCC, RoHS

Design for macbook oro | 7 in 1, multi adapter | Aluminum shell material

choetech **Best Seller**

9-In-1 USB-C Multiport Adapter



Product Parameters:

Model	HUB-M15
Material	Aluminum Alloy
Interface	USB-C, HDMI, VGA, USB3.0 x 3, RJ45, SD Card Reader, TF Card Reader, USB-C PD Port
Resolution	HDMI: 4K@30Hz
VGA	1080p@60Hz
HDMI and VGA output simultaneously	1080p@60Hz
Internet speed	1000Mbps
USB-C PD	100W (max)
Available Color	Space Grey
Protocol	DP Alt Mode
Certification	CE, FCC & RoHS

Design for macbook | 9 in 1, multi adapter | Aluminum alloy material



choetech

12-in-1 USB-C Multiport Adapter



Product Parameters:

Model	HUB-M25
Material	Aluminum shell
Interface	USB-C (Male) x 2, HDMI X 2, DP, RJ45, USB3.0 x 2, USB-C, PD, USB2.0 x 2, SD, Micro SD, 3.5mm jack
Resolution	HDMI①: 4K@60Hz (Max) HDMI②: 4K@60Hz (Max) DP: 4K @ 60Hz (Max)
Transfer Speed	USB 3.0: 5Gbps (Max) USB 2.0: 480Mbps (Max) SD/Micro SD: 104Mb/s (Max)
RJ45 Network Transmission	1000Mbps (Max)
USB-C PD Input	100W (Max)

Design for macbook pro | 12 in 1, multi adapter | Aluminum shell material



choetech **Best Seller**

USB-C to HDMI Cable with PD Charging



Product Parameters:

Model	XCH-M180
Material	Aluminum Housing + Gold-plated Connector
Interface	USB C Female, HDMI, USB C Male
HDMI Resolution	4K x 2K (3840x2160)@60Hz
USB C Output	20V/3A (PD60W)
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Gray
Certification	CE, FCC & RoHS

Type c to hdmi+pd cable | Aluminum and gold plated material | PD 60w fast charging output



choetech

Thunderbolt 3 to Dual HDMI Adapter



Product Parameters:

Model	HUB-H07
Material	PVC cable + aluminum alloy housing
Interface	USB C, 2 x HDMI
Resolution	Up to 4K@60Hz
Data Transfer Rate	40Gbps
Available Color	Black
Certification	Thunderbolt 3, CE, FCC & RoHS
Cable Length	254mm

Thunderbolt 3 certificated | Dual HDMI | Aluminum alloy and pvc material



choetech

Thunderbolt 3 to Dual DP Adapter



Product Parameters:

Model	HUB-D03
Material	PVC cable + aluminum alloy housing
Interface	USB C, 2 x DP
Resolution	Up to 4K@60Hz
Data Transfer Rate	40Gbps
Available Color	Black
Certification	Thunderbolt 3, CE, FCC & RoHS
Cable Length	254mm

Thunderbolt 3 certificated | Dual DP | Aluminum alloy and pvc material



choetech

USB-C to HDMI Adapter





Product Parameters:

Model	HUB-H04
Material	PVC Shell + Gold-plated Connector
Interface	USB Type-C, HDMI
Resolution	4K (3840x2160)@60Hz
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC & RoHS

Easy to carry | Strong compatibility | Material used is safe

choetech

USB-C to HDMI Adapter (Coaxial Cable)



Product Parameters:

Model	HUB-H10
Material	Braid Shielding + Gold-plated Connector + Aluminum Housing
Interface	USB C, HDMI
Resolution	4K (3840x2160)@60Hz
Protocol	DP Alt Mode
Available Color	Space Gray
Cable Length	0.2m
Certification	CE, FCC & RoHS

Easy to carry | Strong compatibility | Aluminum, braid shielding, gold-plated connector material

Streaming from Your Phone

Enjoy larger screen with friends and families



choetech

USB-C to Display Port Adapter (Coaxial Cable)



Product Parameters:

Model	HUB-H11
Material	Braid shielding + gold-plated connector + aluminum
Interface	USB Type-C, DisplayPort
Resolution	4Kx2K (3840x2160)@60Hz
Protocol	DP Alt Mode
Cable Length	0.2m
Available Color	Space Gray
Certification	CE, FCC & RoHS

Easy to carry | Strong compatibility | Aluminum, braid shielding, gold-plated connector material

Right Adapter for DP Displays

Makes multi-monitors displays a breeze



Only for video and audio transfer, NOT for charging

choetech

USB-C TO HDMI Adapter 8K/60Hz



Product Parameters:

Model	HUB-H16
Material	Aluminum shell
Interface	USB Type-C to HDMI Female
Resolution	8K/60Hz
Cable Length:	110mm
Certification	CE, FCC & RoHS

Easy to carry | Strong compatibility | Support video and audio output; Mirror mode and extend mode are available.



choetech

USB C to RJ45 Adapter





Product Parameters:

Model	HUB-R01
Material	Plastic case, nickel-plated connector
Interface	USB 3.1 Gen 1 Type-C, RJ45
Network Speed	10M/100/1000Mbps
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC & RoHS

Easy to carry | Strong compatibility | Support Thunderbolt 3


choetech

USB-C to VGA Adapter



Product Parameters:

Model	HUB-V01
Material	Aluminum Alloy Shell + Gold-plated Connector
Interface	USB Type-C, VGA
Resolution	1080p@60Hz, backward compatible with 1080p@30Hz, 720p
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC & RoHS

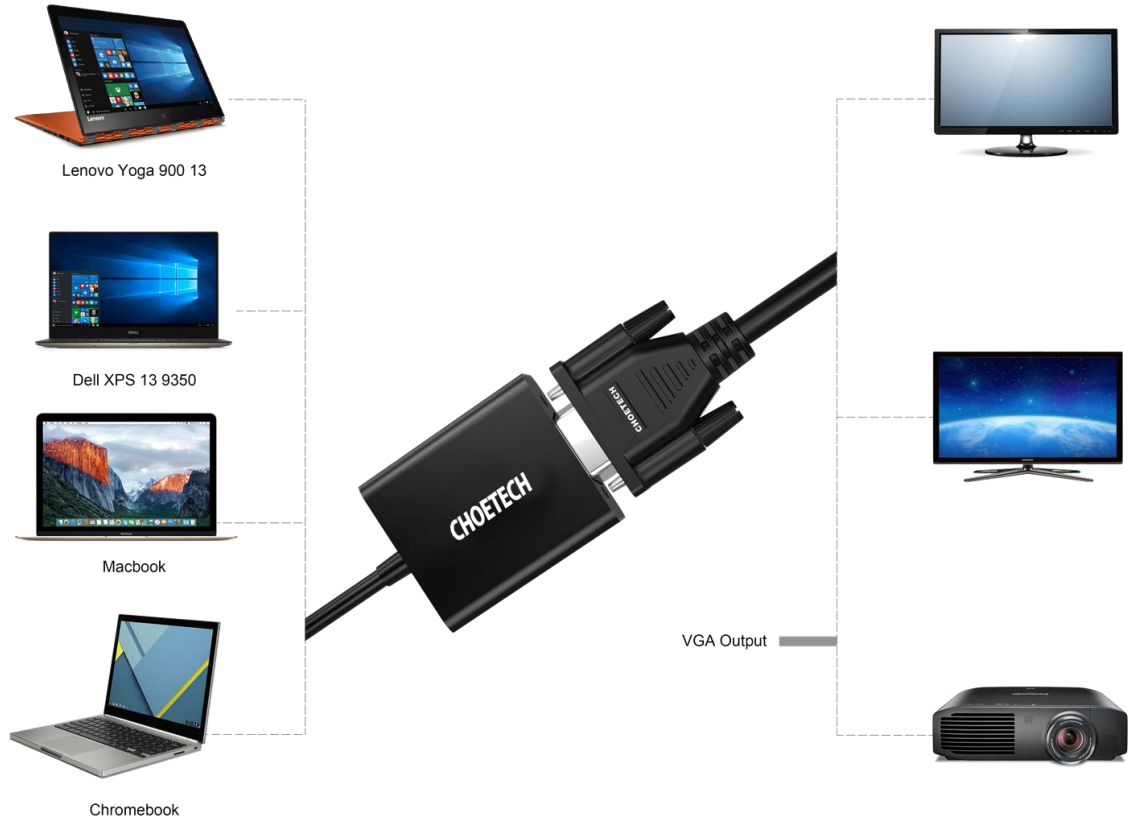

Easy to carry | VGA single connector | Aluminum alloy shell material

choetech

USB-C to Mini DP Adapter



Product Parameters:

Model	HUB-M06
Material	Gold-plated connector + aluminum shell
Interface	USB C, Mini DP, USB-C PD
Charging Speed	PD 60W (Max)
Resolution	4K (3840x2160)@60Hz
Protocol	DP Alt Mode
Available Color	Siliver
Certification	CE, FCC & RoHS

Multi output, mini dp and pd charging

Strong compatibility

Aluminum, gold-plated connector material



choetech

USB-C to HDMI + PD Adapter




Product Parameters:

Model	HUB-M03
Material	Aluminum Alloy Shell + Gold-plated Connector
Interface	USB Type-C, HDMI, USB Type-C PD (Female)
Charging Speed	20V/3A (PD 60W Max)
Resolution	4K (3840x2160)@60Hz
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC & RoHS

Multi output, pd charging and hdmi

Strong compatibility

Aluminum, gold-plated connector material

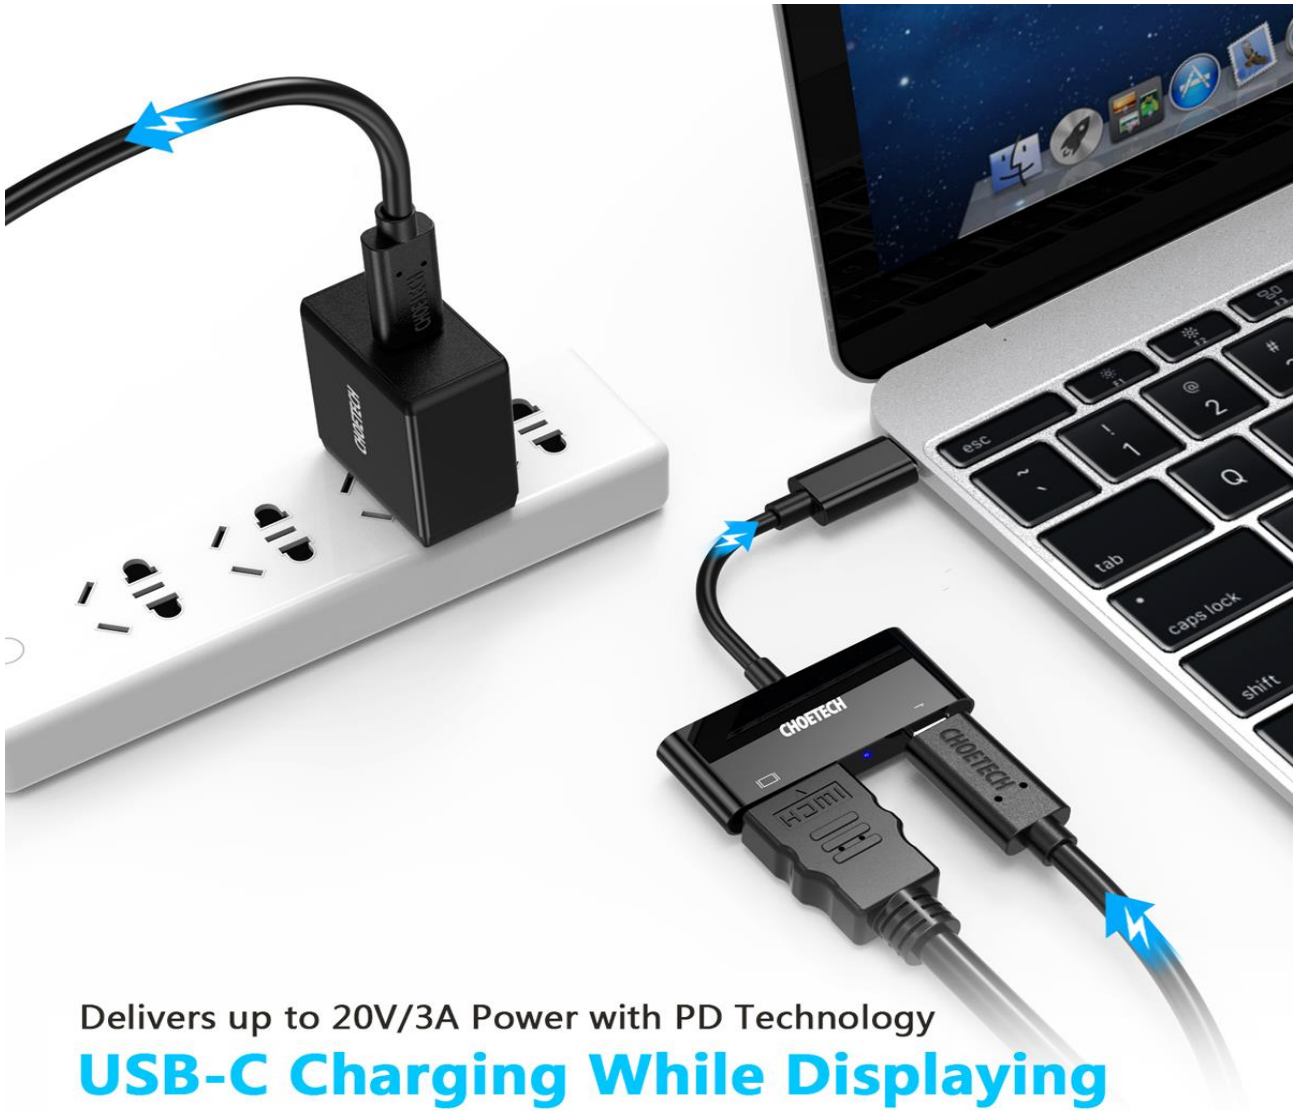

Delivers up to 20V/3A Power with PD Technology

USB-C Charging While Displaying

choetech

USB-C to HDMI + VGA Adapter



Product Parameters:

Model	HUB-M17
Material	Aluminum Alloy Shell + Gold-plated Connector
Interface	USB-C, HDMI, VGA
Resolution	HDMI: 4K@30Hz
VGA	1080p@60Hz
Available Color	Black
Protocol	DP Alt Mode
Certification	CE, FCC & RoHS

Multi output, HDMI and VGA port

Strong compatibility

Aluminum, gold-plated connector material

4K UHD Resolution

Support resolution up to 4K x 2K/30Hz when use HDMI alone.



choetech

USB-C to HDMI Cable



Product Parameters:

Model	CH0019
Material	PVC (cable + shell) + Gold-plated Connector
Interface	USB Type-C, HDMI
HDMI Resolution	4Kx2K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black, White
Certification	CE, FCC & RoHS

Type c to hdmi cable | PVC material | Best seller of choetech in hdmi category



choetech

CHOETECH USB-C to HDMI 4K PVC Cable



Product Parameters:

Model	CH0020
Material	PVC (cable + shell)
Interface	USB Type-C, HDMI
HDMI Resolution	4Kx2K (3840x2160)@60Hz
Cable Length	3m
Protocol	DP Alt Mode
Available Color	Black, White
Certification	CE, FCC & RoHS

Type c to hdmi cable | Pvc material | 3M long cable length

4K @60HZ UHD Resolution



4k resolution depends on 4k video source and 4k monitor.

choetech

USB-C to HDMI Cable



Product Parameters:

Model	CH0021
Material	Aluminum Housing + Nylon Braided Cable + Gold-plated Connector
Interface	USB Type-C Male, HDMI Male
HDMI Resolution	4K (3840x2160)@60Hz
Cable Length	2m
Protocol	DP Alt Mode
Available Color	Gray + Black
Certification	CE, FCC & RoHS

Type c to dp cable | Nylon braided and aluminum material | Best seller of choetech in dp category



choetech

USB-C to HDMI Cable



Product Parameters:

Model	XCH-0030
Material	PVC + Gold-plated connector
Interface	USB-C, HDMI
HDMI Resolution	4K@30Hz
Cable Length	3m
Protocol	DP Alt Mode
Color	Black
Certification	CE, FCC & RoHS



Type c to HDMI cable | PVC and gold plated material | 3m length

choetech

USB-C to DisplayPort Cable



Mirror or Extend Your Screen As You Need

Extend mode

Use an external display as your main workspace or to extend your desktop.



Mirror Mode

Delivering a incredibly clear video to the connected display from small screen.



Product Parameters:

Model	XCP-1801
Material	PVC + gold-plated connector
Interface	USB Type-C; DP
HDMI Resolution	4K*2K (3840*2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS

Type c to DP cable | PVC and gold plated material | Extend mode and mirror mode

choetech


CHOETECH USB-C to DisplayPort 4K briad Cable



USB Type C Devices



DisplayPort Devices

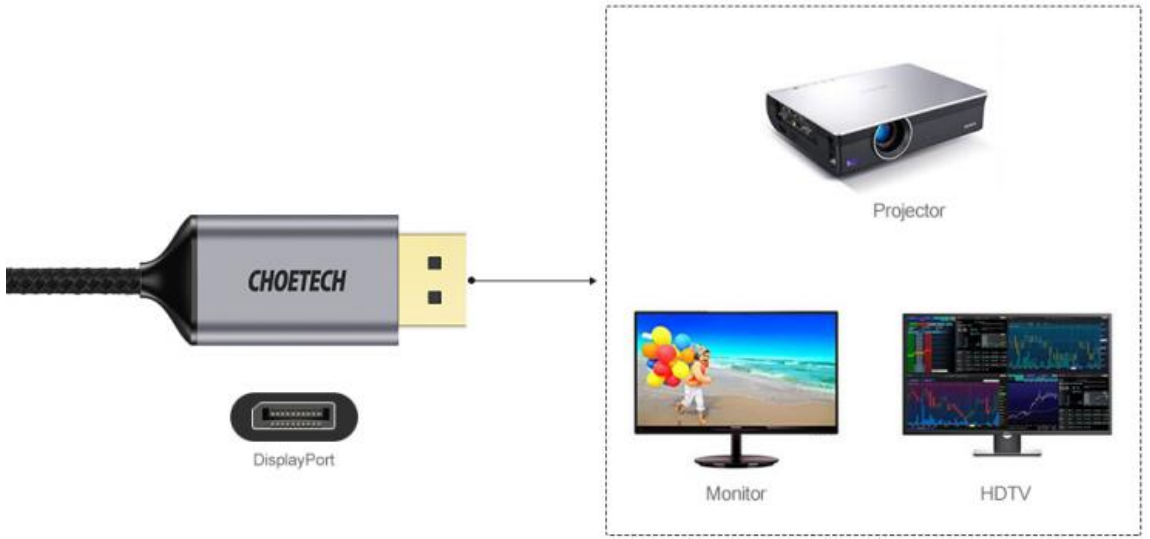


Product Parameters:

Model	XCP-1802
Material	Nylon braid + gold-plated connector
Interface	USB Type-C; DP
HDMI Resolution	4K*2K (3840*2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS

Type c to dp cable | nylon braid and gold plated material | Extend mode and mirror mode

choetech

CHOETECH L shape USB-C to HDMI 4K Braid Cable (Coxial line)

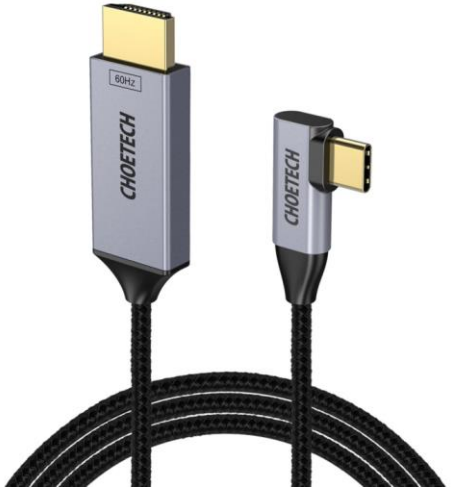



Product Parameters:

Model	XCH-1803
Material	Aluminum Housing + Nylon Braided Cable + Gold-plated Connector
Interface	USB Type-C Male, HDMI Male
HDMI Resolution	4K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Gray + Black
Certification	CE, FCC & RoHS

L type-c shape | 4K coxial line braid cable | Best seller of choetech in dp category

choetech


CHOETECH USB-C to HDMI 4K Braid Cable (Coxial line)



Product Parameters:

Model	XCH-1804
Material	Aluminum Housing + Nylon Braided Cable + Gold-plated Connector
Interface	USB Type-C Male, HDMI Male
HDMI Resolution	4K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Gray + Black
Certification	CE, FCC & RoHS

metal housing | 4K coxial line braid cable | Best seller of choetech in dp category

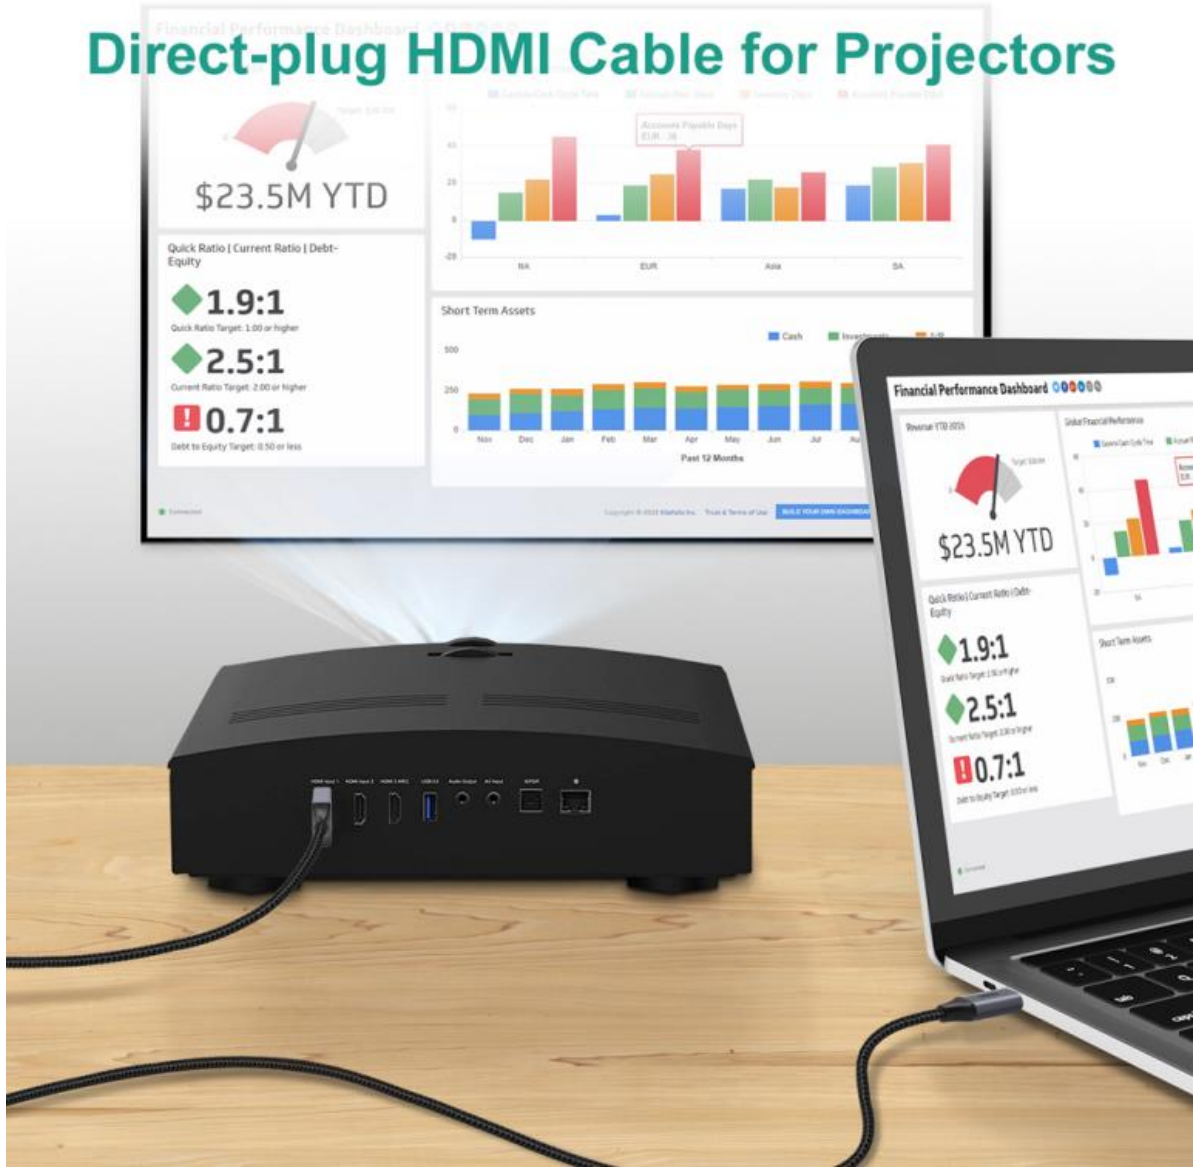

choetech

DP/M or USB-C Adapter



Product Parameters:

Model	XCP-1803
Port	DP/M
Material	ABS plastic shell
Wire Length	1.8M
Resolution	8K/30Hz
Color	Black
Output	DP/M or USB-C
Certifications	FCC,CE, RoHS
Packing List	USBC TO DP Line Choetech After-sales Card *1 Specification *1 Blister

Type c to PD cable | AbS plastic material | 8k 30hz cable



choetech

8K DisplayPort Cable



Product Parameters:

Model	XDD01
Interface	2 x Display Port
Resolution	Up to 8K (7680 x 4320)@60Hz
Bandwidth	32.4Gbps
Refresh Rate	8K (7680x4320)@60Hz, 4K (3840 x 2160)@144Hz, 2K (2560x1440)@165Hz

Dp to DP cable | ABS and gold plated material | 8k 60hz



choetech

USB C to Mini DisplayPort Cable



Product Parameters:

Model	XCM-1501
Material	USB C, Mini DisplayPort
Interface	PVC + Gold-plated connector
Mini DisplayPort Resolution	4K x 2K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS

Type c to mini DP | PVC and gold plated material | 4k*2k 60hz

One-cable Setup, No Adapter Needed



choetech


8K HDMI Cable



Product Parameters:

Model	XHH01
Interface	2 x HDMI
Resolution	Up to 8K (7680 x 4320)@60Hz
Bandwidth	48Gbps
Refresh Rate	8K (7680x4320)@60Hz, 4K (3840 x 2160)@144Hz, 2K (2560x1440)@165Hz
Cable Length	2m

Hdmi to HDMI cable | Aluminum and gold plated material | 8k HDMI cable

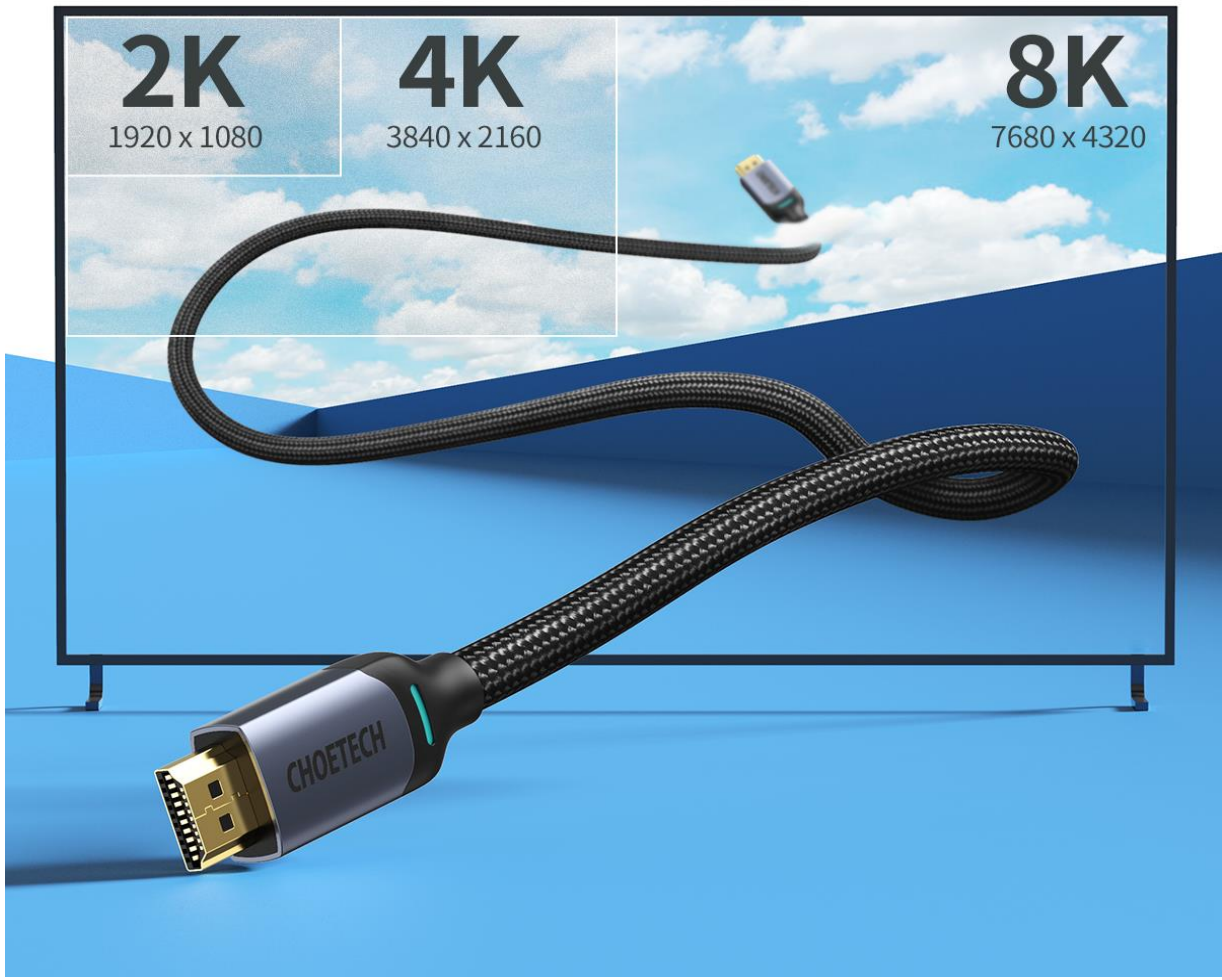

choetech

CHOETECH HDMI to HDMI Cable



Product Parameters:

Model	XHH02
Port	HDMI*2
Material	Plastic
Wire Length	1.8M
Resolution	4K/30Hz
Color	Black
Output	DP/M or USB-C
Certifications	FCC,CE, RoHS
Packing List	HDMI to HDMI cable Choetech aftermarket card *1 specification *1 plastic blister

1.8m length | abs and gold plated material | 4k 30hz



choetech **Best Seller**

HDMI to HDMI Cable





Product Parameters:


Model	XHH03
Port	HDMI
Material	Plastic
Wire Length	2M
Resolution	8K/60Hz
Color	Black
Output	DP/M or USB-C
Certifications	FCC,CE, RoHS
Packing List	HDMI to HDMI cable Choetech aftermarket card *1 specification *1 plastic blister

2m length | ABS and gold plated material | 8k 60hz

choetech

CHOETECH USB C to VGA Cable



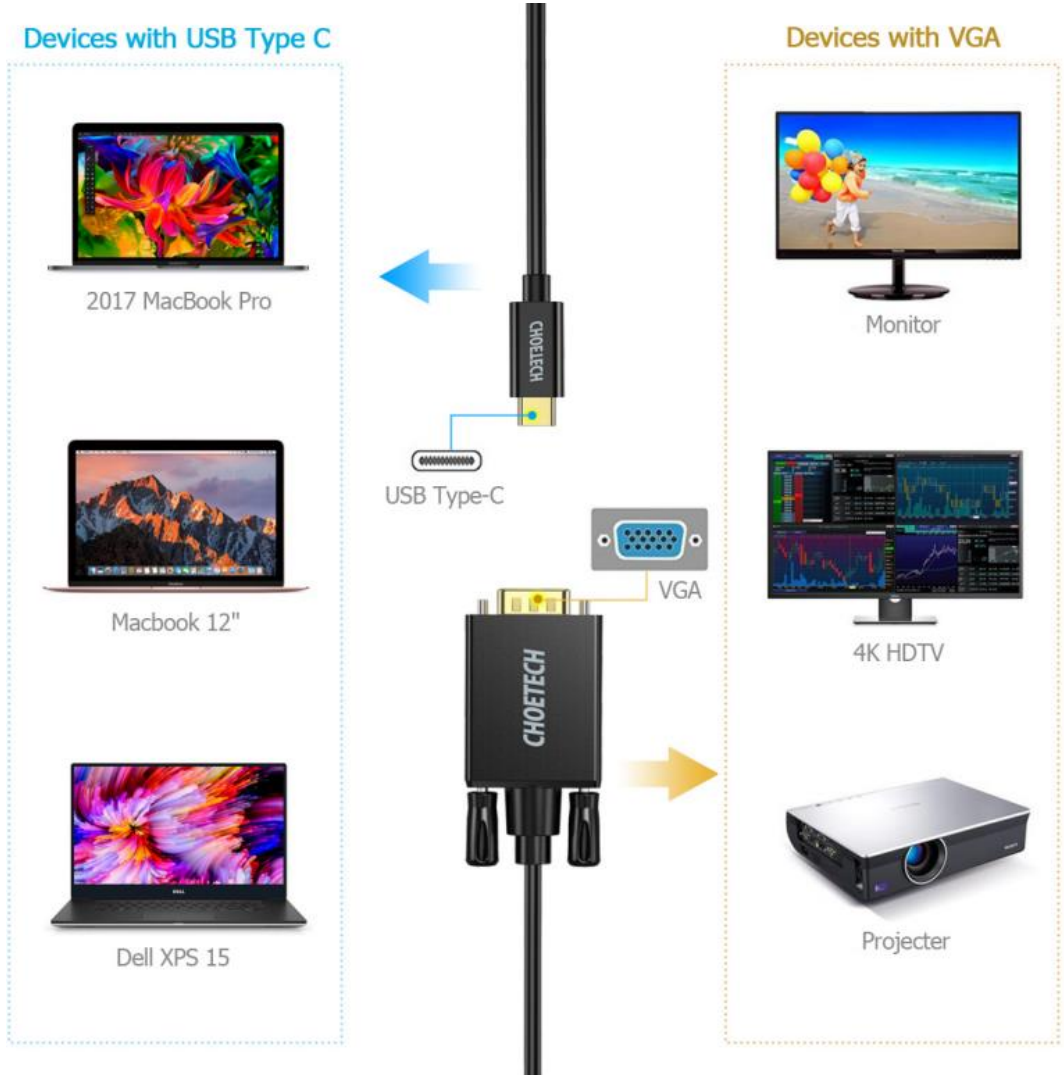

Product Parameters:

Model	XCV-1801
Material	PVC + Gold-plated connector
Interface	USB-C, VGA
VGA Resolution	4K x 2K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS

Ultra HD Resolution | No limit For Version | Gold-plated Contacts

choetech

CHOETECH USB C to DVI Cable





Product Parameters:

Model	XCD-0018
Material	PVC + Gold-plated connector
Interface	USB-C, DVI
VGA Resolution	4K x 2K (3840x2160)@30Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS



Ultra HD Resolution | No limit For Version | Gold-plated Contacts

choetech

USB C to Mini DisplayPort Cable



Product Parameters:

Model	XCM-1501
Material	USB C, Mini DisplayPort
Interface	PVC + Gold-plated connector
Mini DisplayPort Resolution	4K x 2K (3840x2160)@60Hz
Cable Length	1.8m
Protocol	DP Alt Mode
Available Color	Black
Certification	CE, FCC, RoHS

Ultra HD Resolution | No limit For Version | Gold-plated Contacts

One-cable Setup, No Adapter Needed



choetech

Light to HDMI Cable



Product Parameters:

Model	LH0020
Material	Aluminium Alloy+PVC
Interface	Lightning to HDMI
External power supplies	5V2A
Color	Silver
N.W.	79g
G.W.	94g
Avilable Color	Sliver+White
Certifications	CE,RoHS
Compatibility	IOS 8- iOS 13 Compatible with the 8~13version for iOS Systems
Packing List	1X cable,1X instruction manual

Vivid Visuals | Wide Compatiblity | Mutil Function Using



choetech

USB 3.0 Extension Cable



Product Parameters:

Model	XAA001
Interface	USB-A Male to USB-A Female
Material	Nylon braided cable + aluminum alloy shell
Data Transfer Speed	USB3.0/5Gbps
Color	Space gray
Length	2m
Certifications	CE, FCC, RoHS

Wide Compatiblity | USB 3.0 Extension | 2M Cable



choetech

USB-C to 3.5mm Audio Jack Adapter



Product Parameters:

Model	AUX003
Interface	USB-C; 3.5mm Male Audio Port
Material	ABS
Color	Black
Length	15mm

Wide Compatiblity | HiFI Level Sound | Slim and Compact



choetech **Best Seller**


Choetech lightening to 3.5mm audio cable



Product Parameters:

Model	AUX005
Interface	lightening; 3.5mm Male Audio Port
Material	ABS
Color	Black/White
Length	55mm

Wide Compatiblity | HiFI Level Sound | Slim and Compact

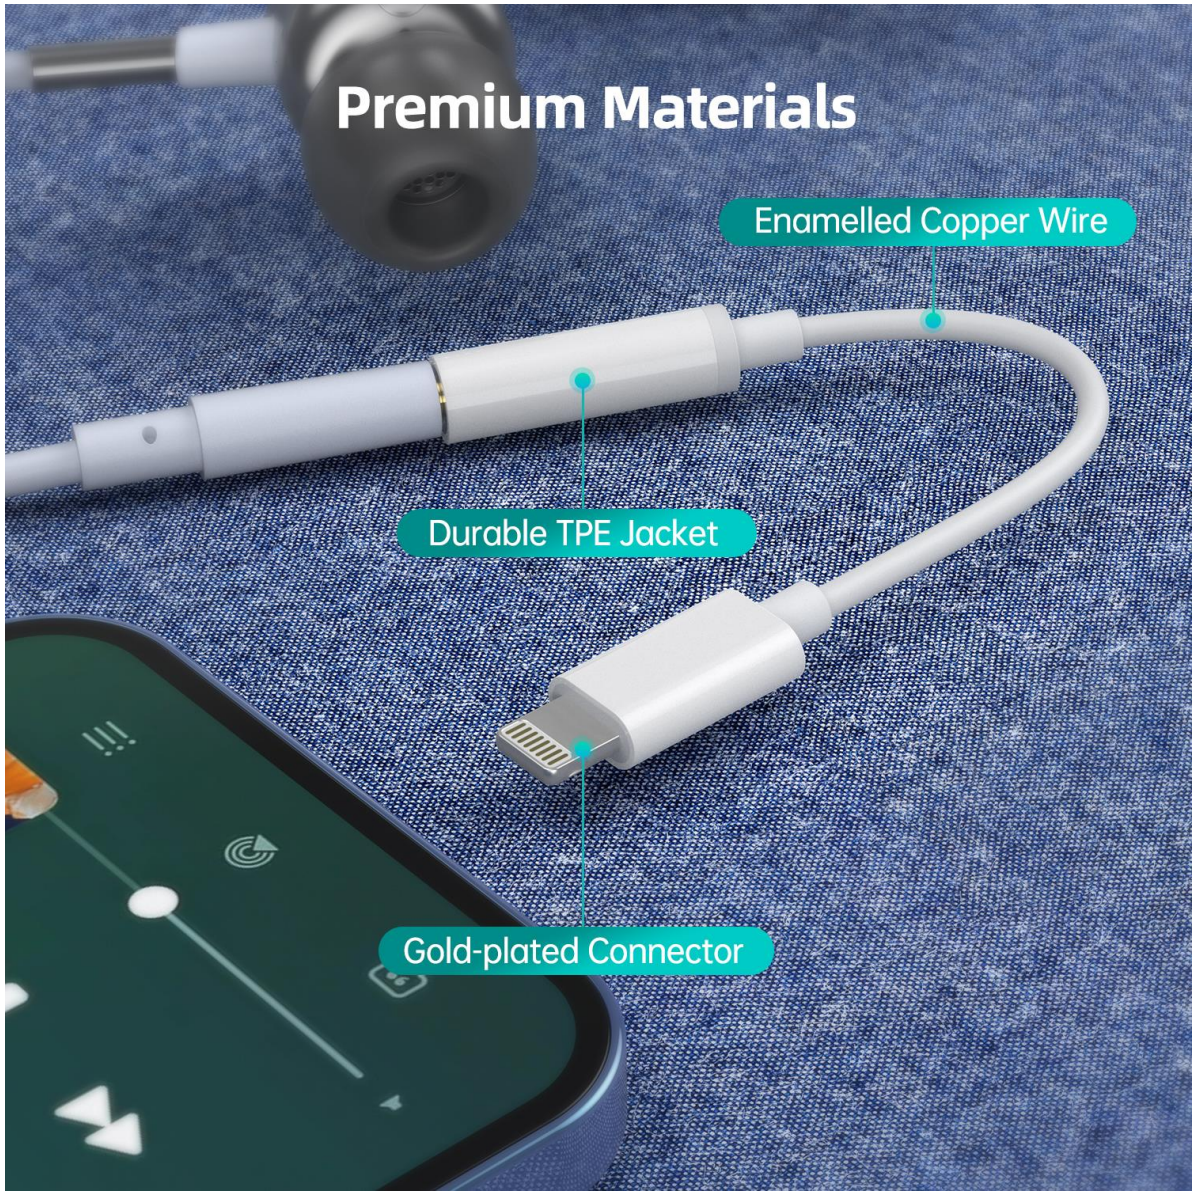

choetech **Best Seller**


CHOETECH USB-C to 3.5mm dc Audio cable



Product Parameters:

Model	AUX006
Interface	type-c male; 3.5mm dc aux
Material	Aluminium housing+nylon braid
Color	Black
Length	1meter

for type-c devices | 3.5MM DC aux | 1meter cable length

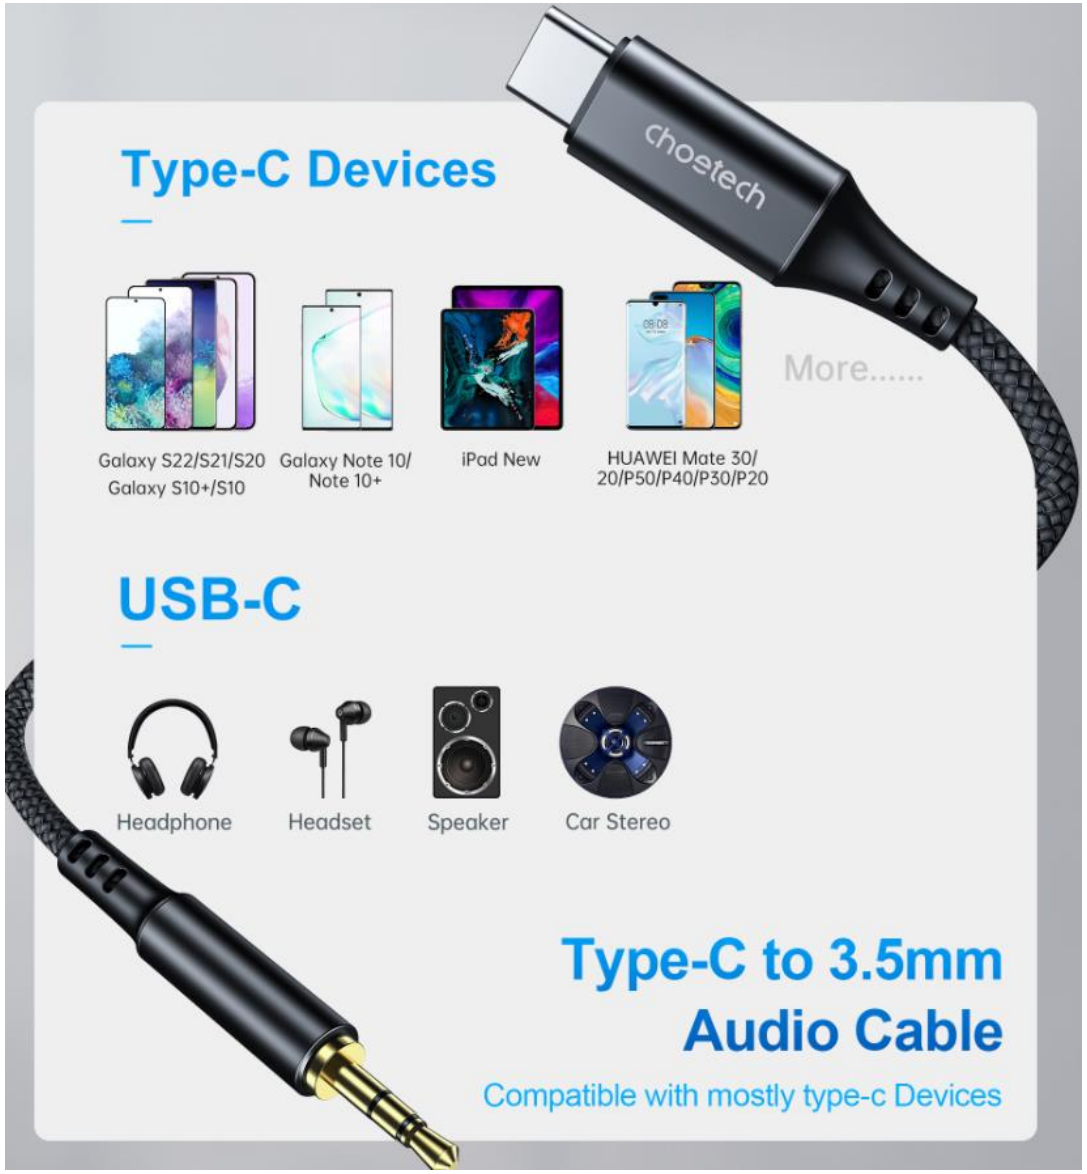

choetech **Best Seller**

CHOETECH Lighteing to 3.5mm dc Audio cable

2Meter/6.6FT



Product Parameters:

Model	AUX007
Interface	Lightening male; 3.5mm dc aux
Material	Aluminium housing+nylon braid
Color	Black
Length	1meter

for Iphone devices | 3.5MM DC aux | 1meter cable length



choetech **Best Seller**


CHOETECH USB-C to 3.5mm dc Audio cable



Product Parameters:

Model	AUX008
Interface	type-c male; 3.5mm dc aux
Material	Aluminium housing+nylon braid
Color	Black
Length	2meter

for type-c devices | 3.5MM DC aux | 2meter cable length

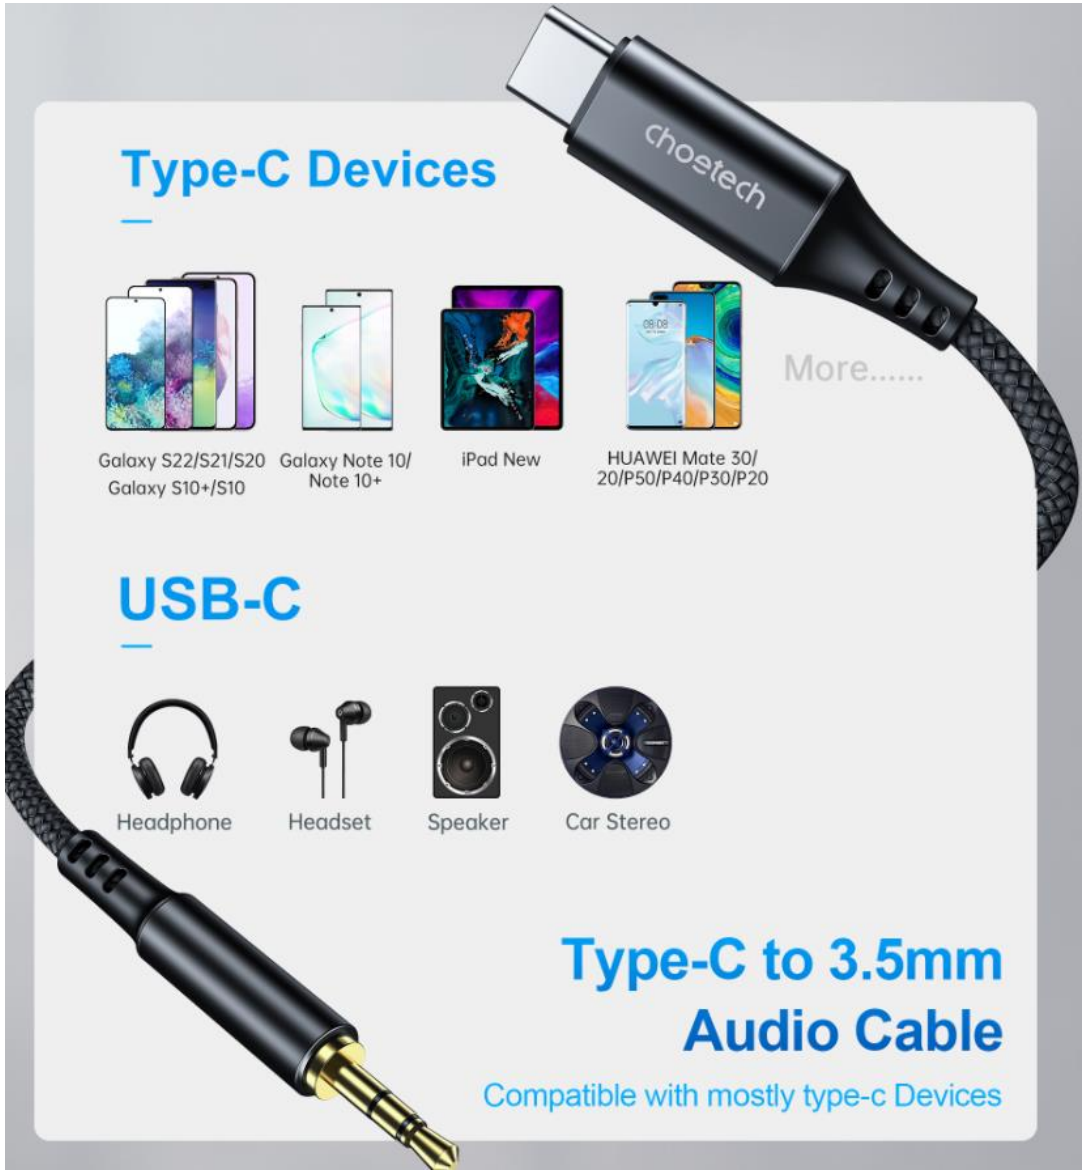

choetech **Best Seller**

CHOETECH Lighteing to 3.5mm dc Audio cable

2Meter/6.6FT



Product Parameters:

Model	AUX009
Interface	Lightening male; 3.5mm dc aux
Material	Aluminium housing+nylon braid
Color	Black
Length	1meter

for Iphone devices | 3.5MM DC aux | 2meter cable length



choetech

Charging cable





choetech

Thunderbolt 3 Active Cable



Product Parameters:

Model	A3006
Interface	2 x Thunderbolt 3 Port
Material	PVC + nickel-plated connector
Transfer Speed	40Gbps
Output	5A/20V 100W (Max)
Video Output	Up to dual 4K@60Hz displays or a 5K display
Length	2m
Certification	CE, FCC, RoHS, Thunderbolt 3

Unrivaled Compatibility | PD100W | Thunderbolt 3



choetech


Thunderbolt 3 Passive Cable



Product Parameters:

Model	A3009
Material	PVC + nickel-plated connector
Interface	2 x Thunderbolt 3
Power Output	20V/5A
Video Output	Single Monitor at 5K@60Hz, Dual Monitors at 4K@60Hz
Length	0.8m
Transfer Speed	40Gbps
Certification	CE, FCC, RoHS, Thunderbolt 3

5K UHD Display | 40Gbp Data Transafer | Thunderbolt 3

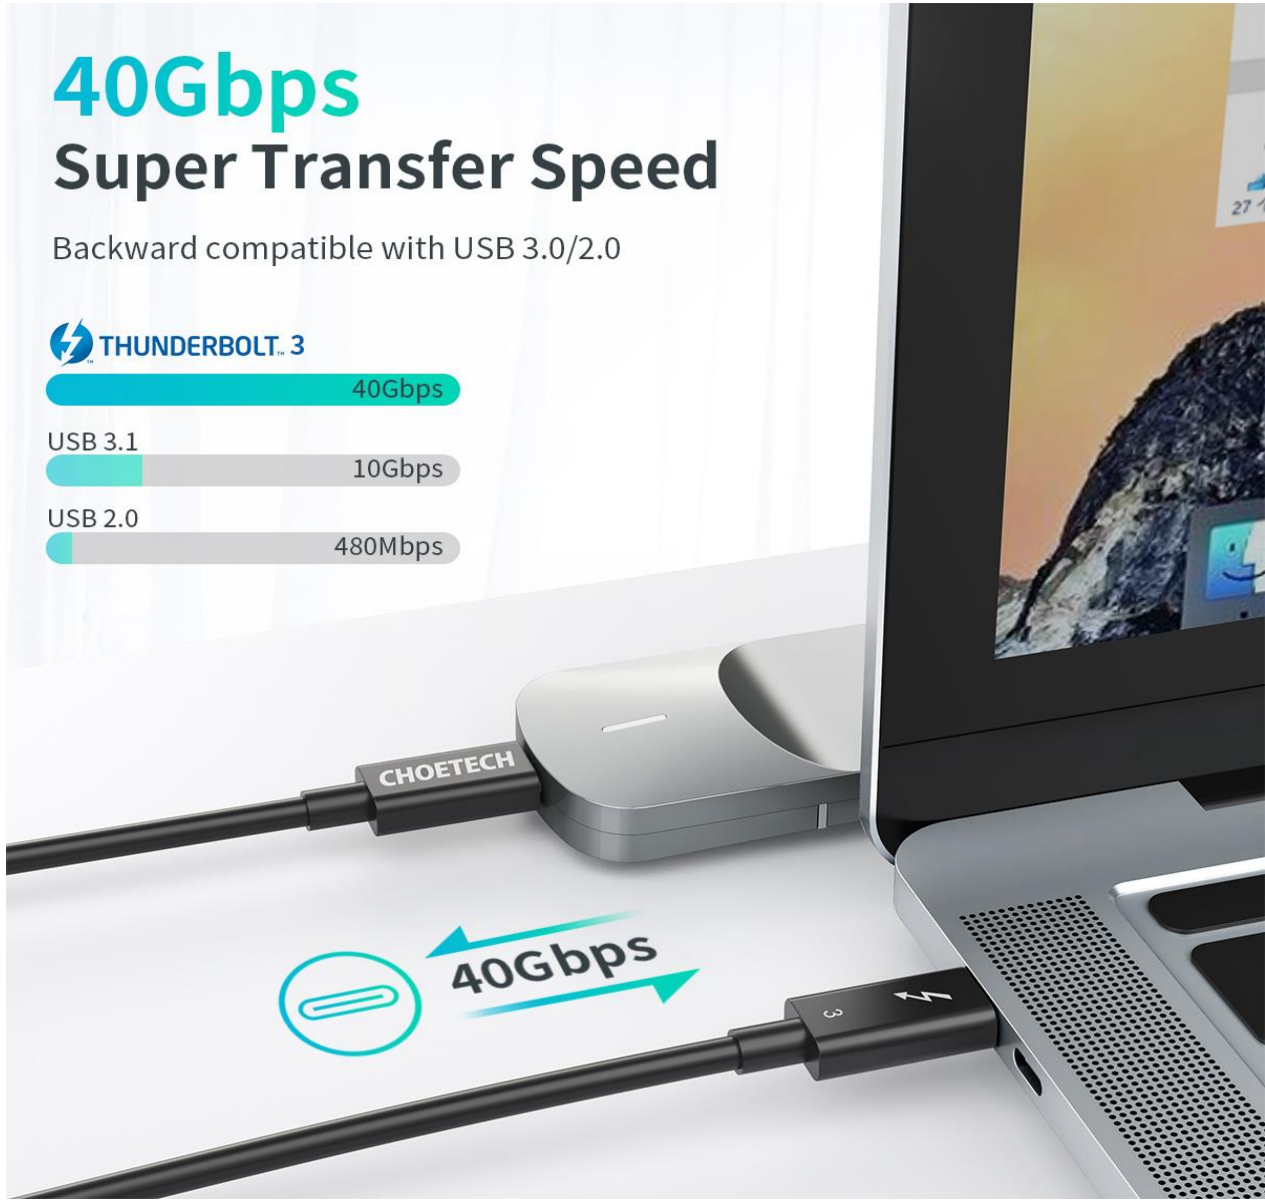

choetech


A3010 Thunderbolt4 Cable



Product Parameters:

Model	A3010
Port	Thunderbolt4（USB-C*2)
Material	ABS+PVC
Output	20V5A（MAX）
Total Power	100W（MAX）
Data Transmission	40Gbps （USB4.0）
Resolution	8K/60Hz downward compatibility 4K/2K/1080P
Color	Black
Porduct Size	0.8M(2.6FT)
N.W.	50g
Certifications	FCC,CE, RoHS，Inter Thunderbolt4
Packing List	USBC to C Thunderbolt4 Cable*1 Choetech Card *1 Instructions *1

Wide Compatiblity | PD100W | 8K /60 Hz

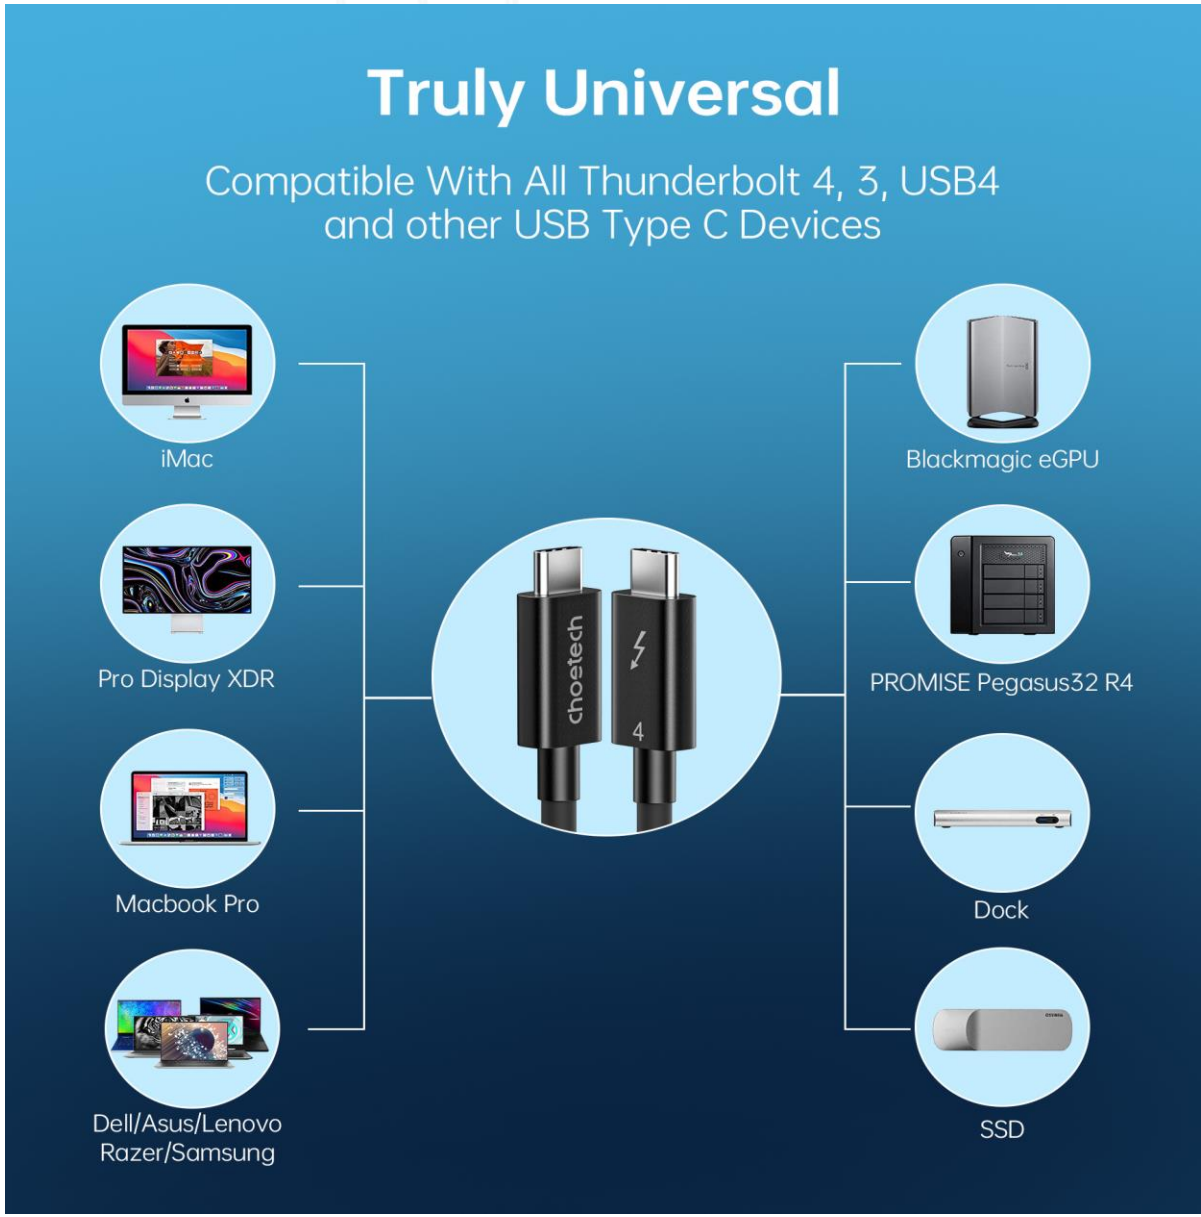

choetech **Best Seller**

CHOETECH MFi USB-A to Lightning Cable



Made for iPhone | iPad | iPod

Fast Charging High Speed Sync Cable

2.4A(Max)Charging Speed is about 1.6 Times FasterThan Normal CableTransfer Data Up to 480mbps



Product Parameters:

Model	IP0026/IP0027
Interface	USB A, Lightning
Material	TPE Shell + Tinplate Shield
Available Color	Black, White
Output	5V/2.4A
Data Transmission	USB2.0/480Mbps
Cable Length	1.2M, 1.8M
Certifications	MFi, CE, FCC, RoHS

MFI Certifcate | Sturdy & Durable | Fast Charging

choetech **Best Seller**

MFi 3-In-1 Charging Cable



Product Parameters:

Model	IP0030
Interface	USA-A , Lightning, Micro USB, Type-C
Material	Nylon Braided Protective Layer + Aluminum Housing
Available Color	Black
Output	5V/2.4A
Data Transmission	480Mbps
Cable Length	1.2m
Certifications	MFi, CE, FCC, RoHS

MFI Certifcate | 3 IN 1 Charging | Wide Compatiblity



choetech **Best Seller**

CHOETECH MFi USB-C to Lightning Cable



Made for
iPhone | iPad | iPod

Product Parameters:

Model	IP0039/IP0041, IP0042
Interface	USB-C, Lightning
Material	Nylon braided
Available Color	Black
Output	3A (Max)
Data Transmission	480Mbps
Cable Length	1.2m, 2M, 3M
Certifications	MFi, CE, FCC, RoHS

MFI Certifcate | PD Fast Charging | Superior Durability



choetech **Best Seller**

PD60W USB-C to USB-C Cable



Product Parameters:

Model	XCC-1014/XCC-1015
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	60W (Max)
Cable Length	1.2M/2M
Available Color	Siliver
Certifications	CE, FCC, RoHS

PD 60W | Wide Compatiblity | Durable & Reliable

Durable and Stable

Premium Nylon Braided adding additional durability and tangle-free, can bear 10000+ bending test.



choetech **Best Seller**

PD100W USB-C to USB-C Cable



Product Parameters:

Model	XCC-1002
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	100W (Max)
Data Transfer Speed	480Mbps
Cable Length	1.8m
Available Color	Siliver
Certifications	CE, FCC, RoHS

PD 100W | Wide Compatiblity | Durable & Reliable



choetech **Best Seller**

PD 60W USB-C to USB-C Cable



Product Parameters:

Model	XCC-1003/XCC-1004/XCC-1027
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	60W (Max)
Data Transfer Speed	480Mbps
Cable Length	1.2m/4ft; 2m/6.6ft
Available Color	Black
Certifications	CE, FCC, RoHS

PD 60W | Extensive Compatiblity | Durable & Reliable



choetech **Best Seller**

PD3.1 240W USB-C to USB-C Cable



Product Parameters:

Model	XCC-1035/ XCC-1036
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	240W (Max)
Data Transfer Speed	48Mbps
Cable Length	1.2m； 2m
Available Color	Black
Certifications	CE, FCC, RoHS

PD 240W | Wide Compatiblity | Durable & Reliable



choetech **New Arrival**

PD3.1 240W USB-C to USB-C Magnet Cable



Product Parameters:

Model	XCC-1051/XCC-1054/XCC-1057
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	240W (Max)
Data Transfer Speed	480Mbps
Cable Length	1.8m
Available Color	black
Certifications	CE, FCC, RoHS

PD 240W | Magnet cable | Durable & Reliable

choetech **New Arrival**

PD100W USB-C to USB-C Magnet Cable



Product Parameters:

Model	XCC-1054
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	100W (Max)
Data Transfer Speed	480Mbps
Cable Length	1.8m
Available Color	black
Certifications	CE, FCC, RoHS

PD 100W | Easy to carry | Durable & Reliable

choetech **New Arrival**

PD60W USB-C to USB-C Magnet Cable




Product Parameters:

Model	XCC-1057
Material	Nylon braided + aluminum housing
Interface	2*Type-C
Output	100W (Max)
Data Transfer Speed	480Mbps
Cable Length	1.8m
Available Color	black
Certifications	CE, FCC, RoHS

PD 100W | Easy to carry | Durable & Reliable

choetech **Best Seller**

USB-A to Lightning 1M TPE cable

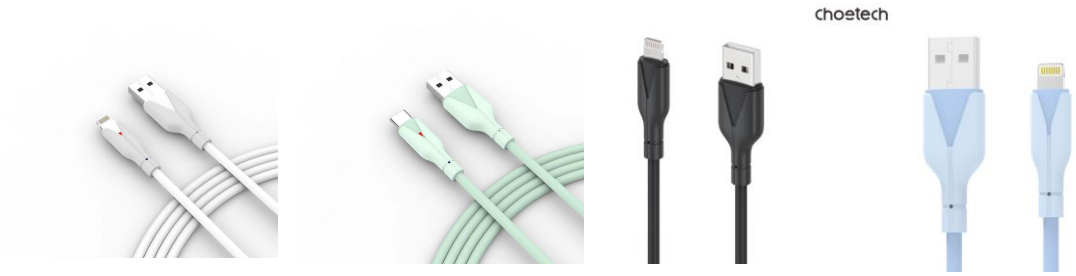

Product Parameters:


Model	XAL-0002
Type	USB-A to lightning
Material	Silicone
Cable Length	1M
Available Color	White, Black, Green
Certifications	CE, FCC, RoHS

Multi colors | TPE material | Wide range of using environment



choetech **Best Seller**

USB-A to Lightning silicone cable

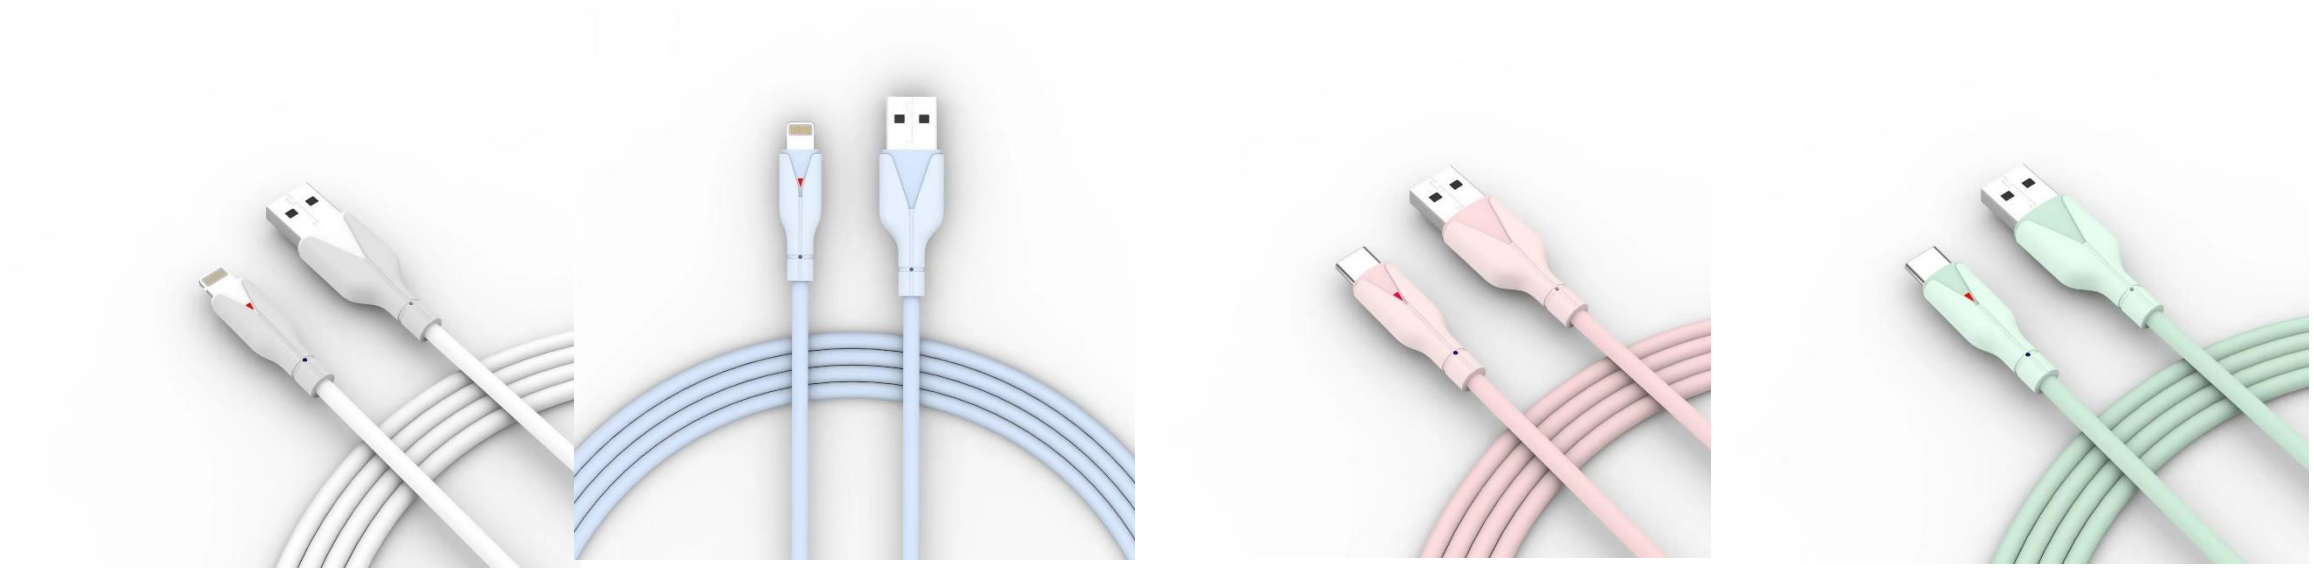

Product Parameters:

Model	XAL-0003
Type	USB-A to lightning
Material	Silicone
Cable Length	1M
Available Color	White, Black, Green
Certifications	CE, FCC, RoHS

Multi colors | Silicone material | Wide range of using environment

choetech **Best Seller**

Type-C to Lightning 1M TPE cable





Product Parameters:

Model	XCL-0002
Type	USB-C to lightning
Material	TPE
Cable Length	1M
Available Color	White, Black, Green,Blue
Certifications	CE, FCC, RoHS

Multi colors | TPE material | Wide range of using environment

choetech **Best Seller**

Type to Lightning 1M Silicone cable





Product Parameters:

Model	XCL-0003
Type	USB-C to lightning
Material	Silicone
Cable Length	1M
Available Color	White, Black, Green,Blue
Certifications	CE, FCC, RoHS

Multi colors | Silicone material | Wide range of using environment

choetech **Best Seller**


USB-C 3.1 GEN 2 Cable



Product Parameters:

Model	XCC-1007
Interface	USB-C, USB-C
Material	Aluminum Alloy Housing + Nylon Braided Cable
Power Output	100W Power Delivery
Video Output	4K@60Hz
Transfer Speed	10Gbps
Cable Length	2m
Color	Black

USB 3.1 | PD100W | 4K@60 UHD Display

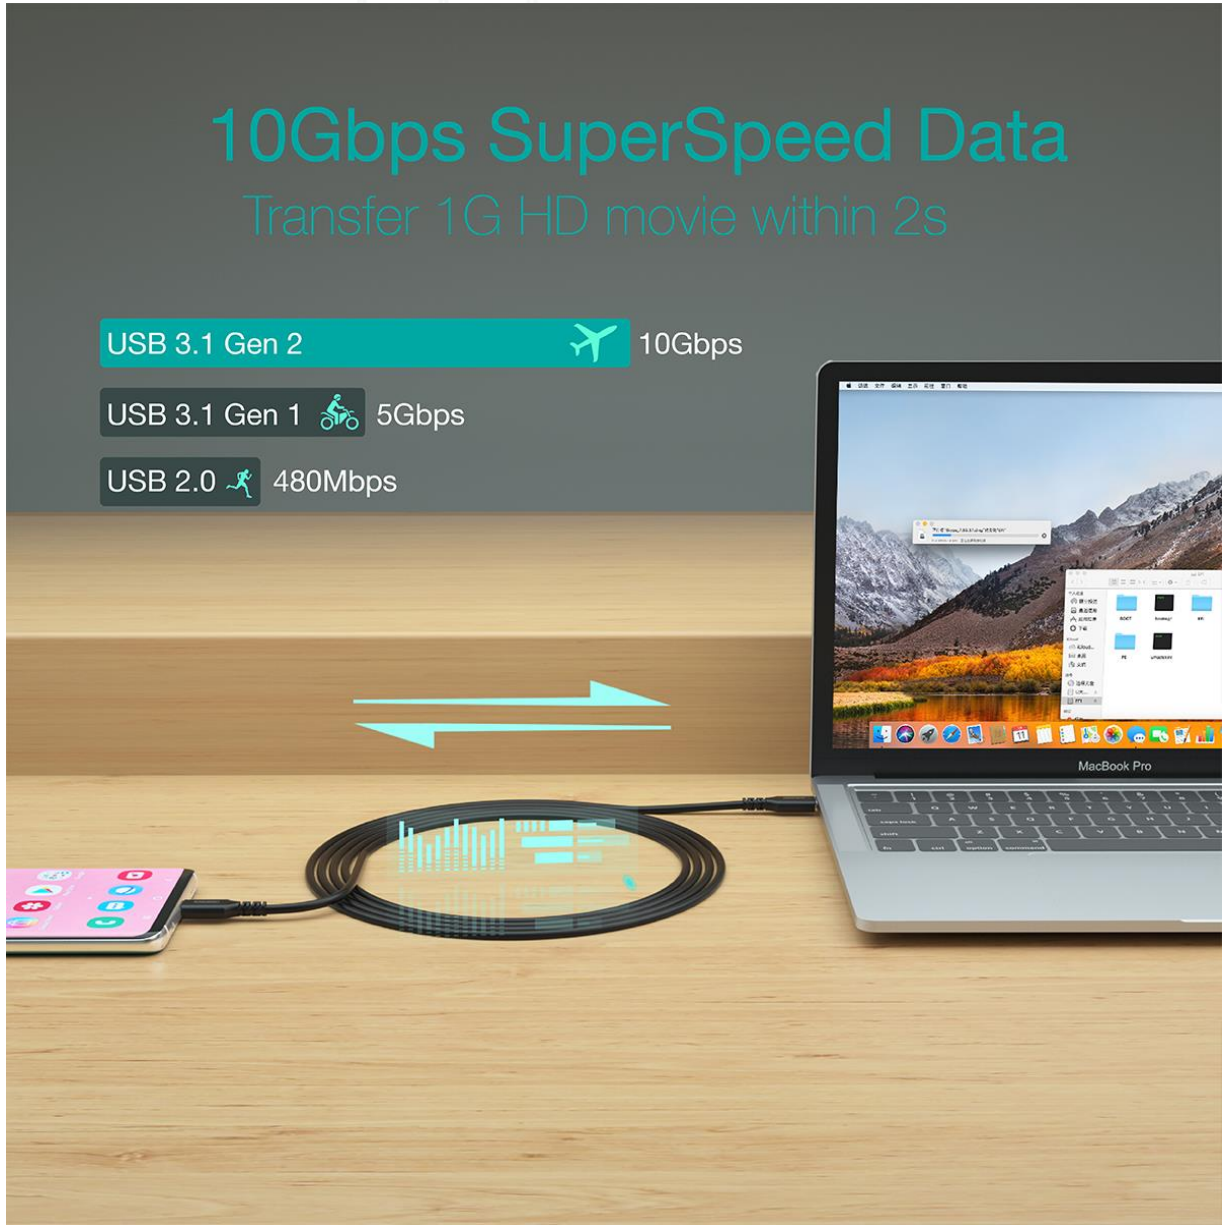

choetech

USB4.0 Gen3 Cable





Product Parameters:

Model	XCC-1028
Port	USB4.0Gen3（USB-C*2)
Material	PVC
Output	20V5A（MAX）
Total Power	100W（MAX）
Data Transmission	40Gbps （USB4.0）
Resolution	8K/60Hz downward compatibility 4K/2K/1080P
Color	Black
Porduct Size	0.8M (2.6FT)
N.W.	50g
Certifications	FCC,CE, RoHS，USB-IF
Packing List	USBC to C USB4.0 GEN3 Cable*1 Choetech After-sales Card *1 Specifications *1

PD 100W | 8K/60Hz | USB 3.1 & USB IF Certificated

choetech

CHOETECH Type-C 10Gbps 2M Extension Cable



Product Parameters:

Model	XCC-1039
Interface	USB-C Male to USB-C Female
Material	Nylon braided cable + aluminum alloy shell
Data Transfer Speed	10Gbps
Color	Space gray
Length	2m
Certifications	CE, FCC, RoHS

Wide Compatiblity | Type-c 10Gbps Extension | 2M Cable



choetech **Best Seller**

CHOETECH USB-C 4 GEN 3 240W 8K Audio Cable

Product Parameters:

Model	XCC-1040
Interface	USB-C, USB-C
Material	Aluminum Alloy Housing + Nylon Braided Cable
Power Output	240W Power Delivery
Video Output	8K@60Hz
Transfer Speed	40Gbps
Cable Length	1.2m
Color	Black, grey




USB 4 | PD240W with E-marker | 8K@60 UHD Display


choetech

USB-C to USB-C Cable







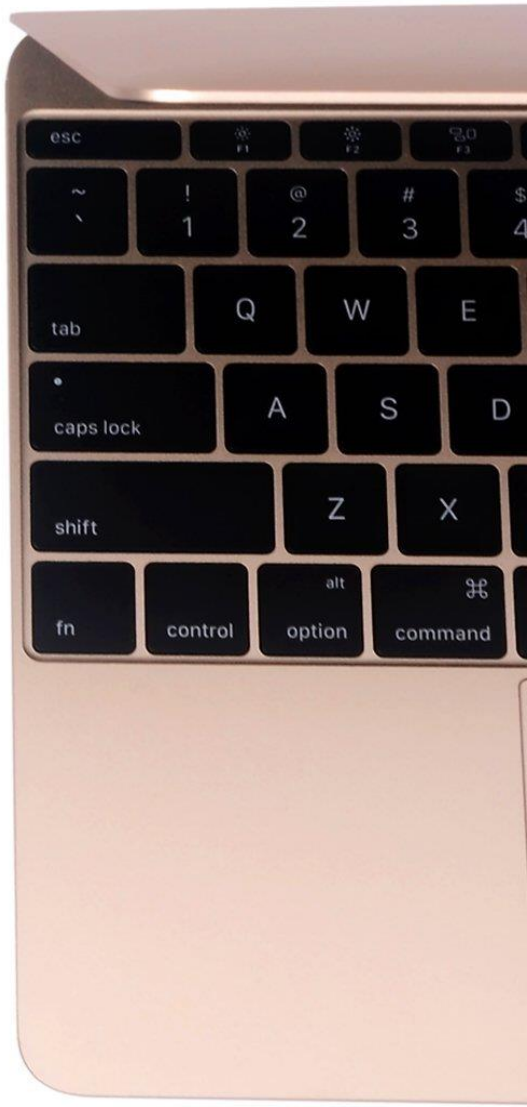

Product Parameters:

Model	CC0001/CC0002/CC0003
Material	PVC
Interface	2*Type-C
Output	3A (Max)
Data Transfer Speed	USB 2.0 (480Mbps)
Cable Length	0.5m/1m/2m
Available Color	Black
Certifications	CE, FCC, RoHS

Compatible Devices:

Apple MacBook(12 inch,2015)
Google ChromeBook Pixel(2015)
Google Nexus 5X,Nokia N1 Tablet
OnePlus Two,Nexus 6P,Pixel C and
other devices with Type C connector

PD 100W | PD 100W | PD 100W

choetech

USB-A to USB-C Cable



Product Parameters:

Model	AC0001/AC0002/AC0003
Material	PVC
Interface	USB-A, Type-C
Output	5V/3A
Data Transfer Speed	USB 2.0 (480Mbps)
Cable Length	0.5m/1m/2m
Available Color	Black
Certifications	CE, FCC, RoHS

Reversible Connector | Wide Compatible | Safe Charging



choetech

CHOETECH USB-A 5A to USB-C braid Cable for Huawei





Product Parameters:

Model	AC0013
Material	Nylon braid
Interface	USB-A, Type-C
Output	5V/3A
Data Transfer Speed	USB 2.0 (480Mbps)
Cable Length	1.2m
Available Color	Black/silver
Certifications	CE, FCC, RoHS

5A fast charging for Huawei | Nylon braid material | Safe Charging

choetech

USB-A to Micro USB Cable



Product Parameters:

Model	AB003
Material	PVC
Interface	USB-A, Micro USB
Output	5V/2.4A
Data Transfer Speed	USB 2.0 (480Mbps)
Cable Length	1.2m
Available Color	White, Black
Certifications	CE, FCC, RoHS

Wide Compatiblity | Safe Charge | High Durablity



choetech

USB-A to USB-C Cable





High Compatibility

Compatible with USB C Smartphones, Tablets, Laptops, etc



Product Parameters:

Model	AC3001
Interface	1 x USB-C, 1 x USB-C
Material	PVC + nickel-plated connector
Data Transfer Speed	USB 3.0 (5Gbps)
Color	Black
Output	5V/2.4A
Length	1m
Ceritification	CE, FCC, RoHs

Sturdy & Durable | Wide Compatiblity | Fast Charge

choetech

Audio





choetech **Best Seller**


HiFi True Wireless Earbuds



Product Parameters:

Bluetooth version: V5.1 is downward compatible with other Bluetooth modes
Bluetooth effective distance: ≥ 10 meters
Best Talking Distance (TBR): <20cm
Maximum power of earphone: 30mW
Audio signal-to-noise ratio S/N: ≥90dB
Frequency response: 60Hz ~ 20KHz
Speaker unit: 13mm high-fidelity copper ring speaker
Built-in battery lithium battery: 3.7V, 25mAh
Music time: about 3.5 hours
Talk time: about 3 hours
Charger input standard: TypeC, DC5V, 500mA-1000mA
Charging time: about 1.5 hours
Charging cases battery: 240mAh

22h standby time | HiFi sound | IPX5 Waterproof

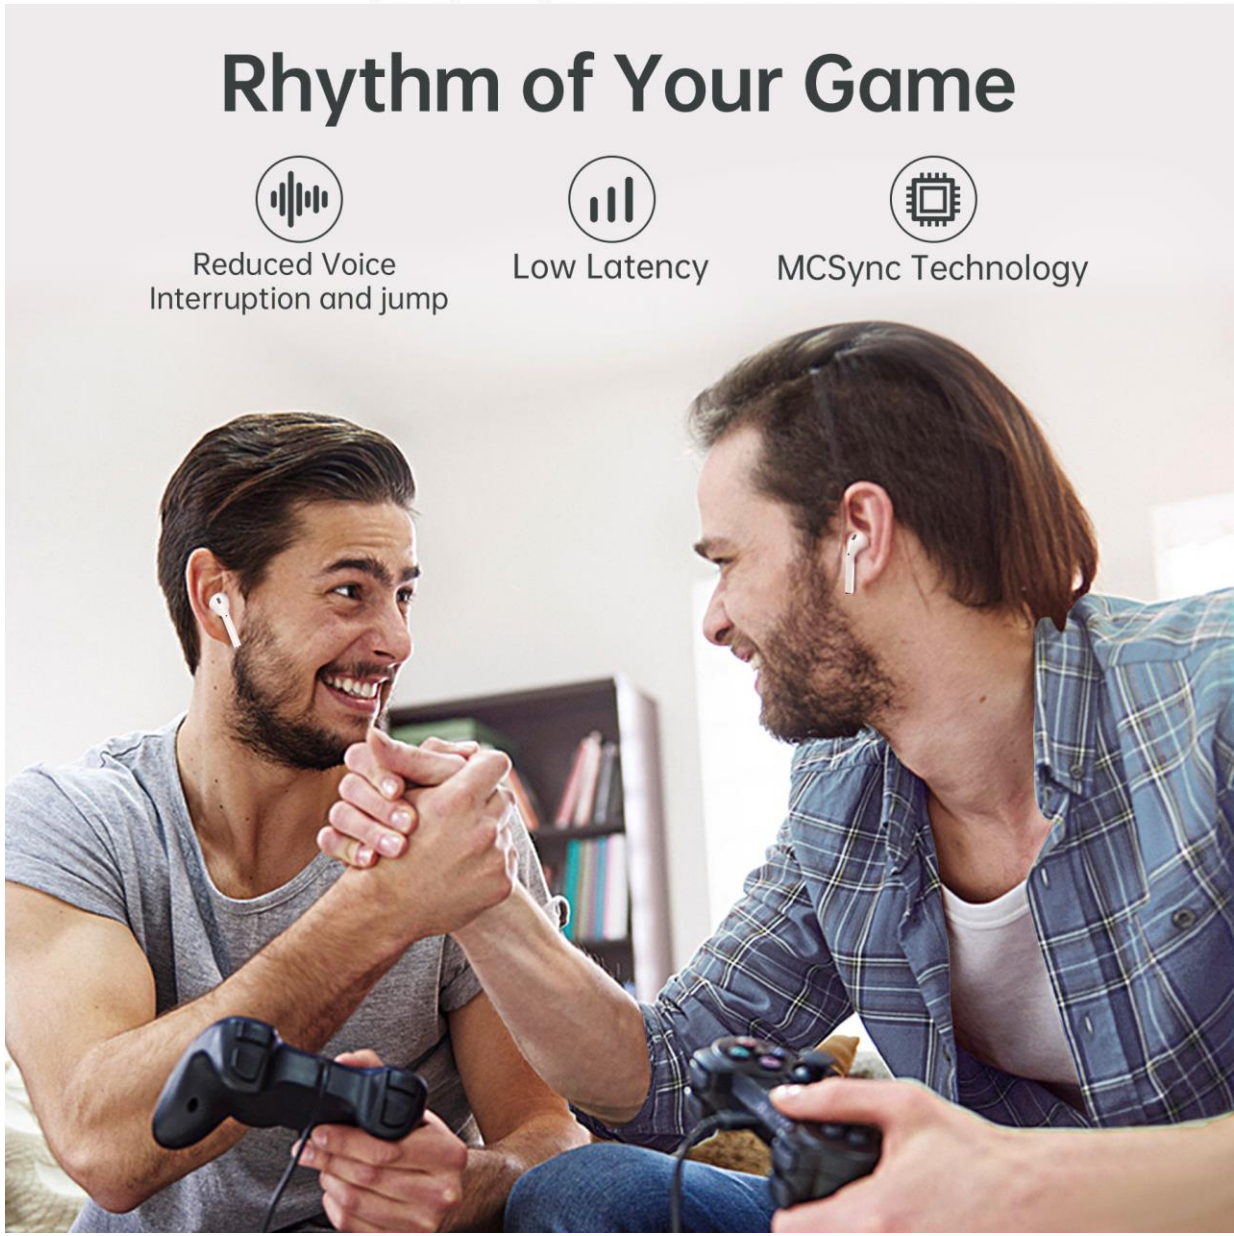

choetech **Best Seller**


True Wireless Earbuds



Product Parameters:

Model	BH-T01
Interface	USB-C
Input	5V/1A
Output	5V/100mA
Earbuds Charging time	1.5h
Transimission Range	10m
Earbuds Battery	40mAh
Charging case Battery	400mAh

HiFI Sound | IPX5 Water Resistance | Smart Touch Control

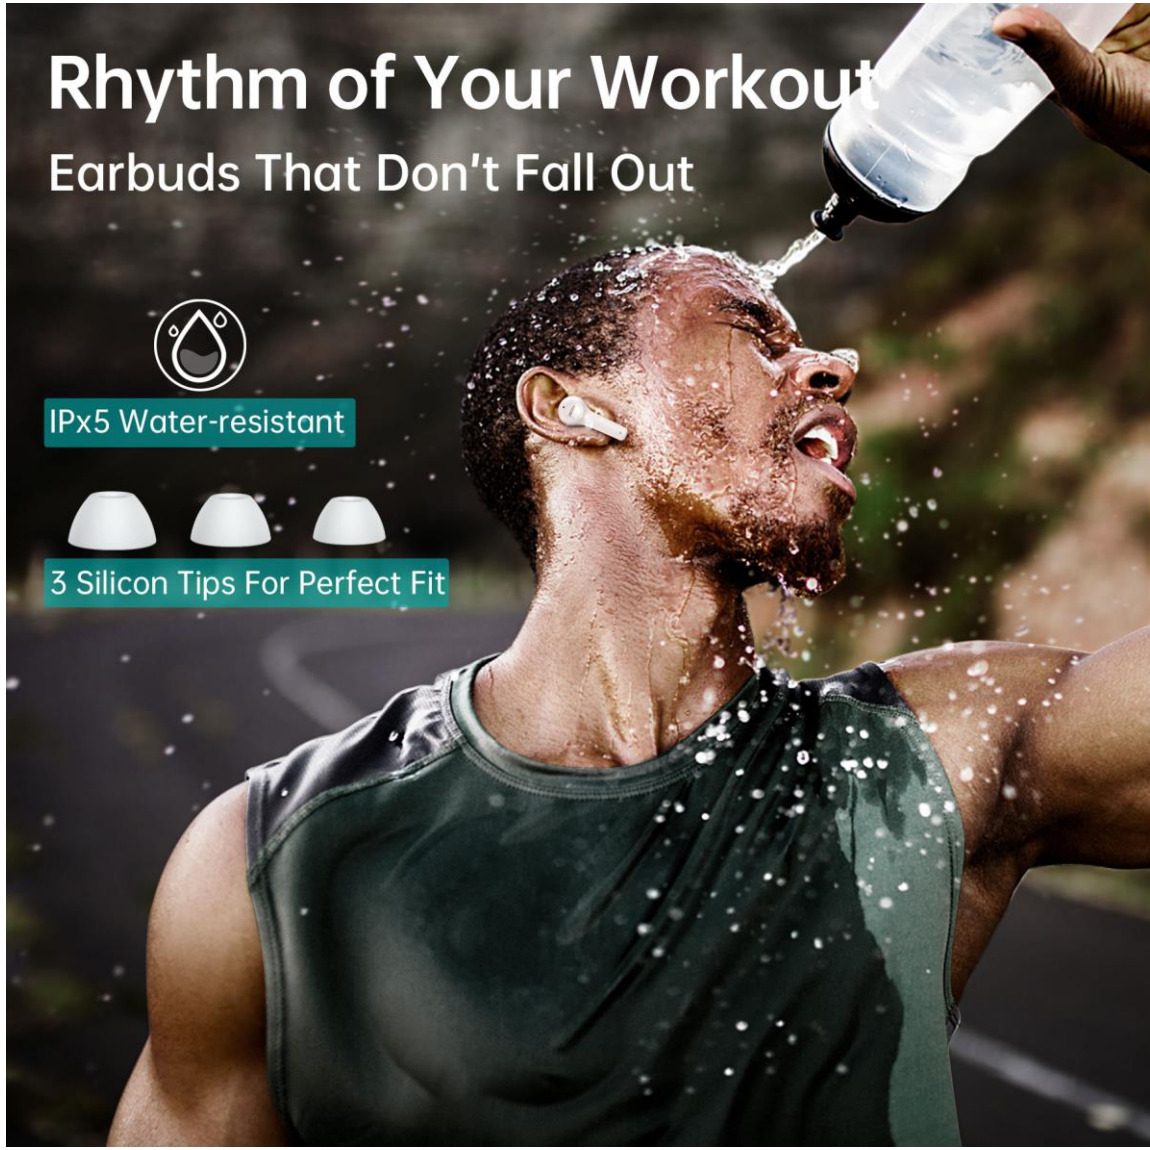

choetech


Ceramic Bluetooth Hanging neck headset



Product Parameters:

Model	OC-A008
Charging specification	5V/200-500mA
Interface	Micro USB
Bluetooth version	Bluetooth V5.0
Output	30mW
Color	Black
Call time	About 7 hour
Music time	About 6 hour
Standby time	About 110 hour
Charging time/current	About 2h/120mA
Battery cycle life	≥300次
Bluetooth agreement	A2DP、AVRCP、SPPP、HFP

Neck-mounted Design | Ceramic Craft | HI-FI Sound

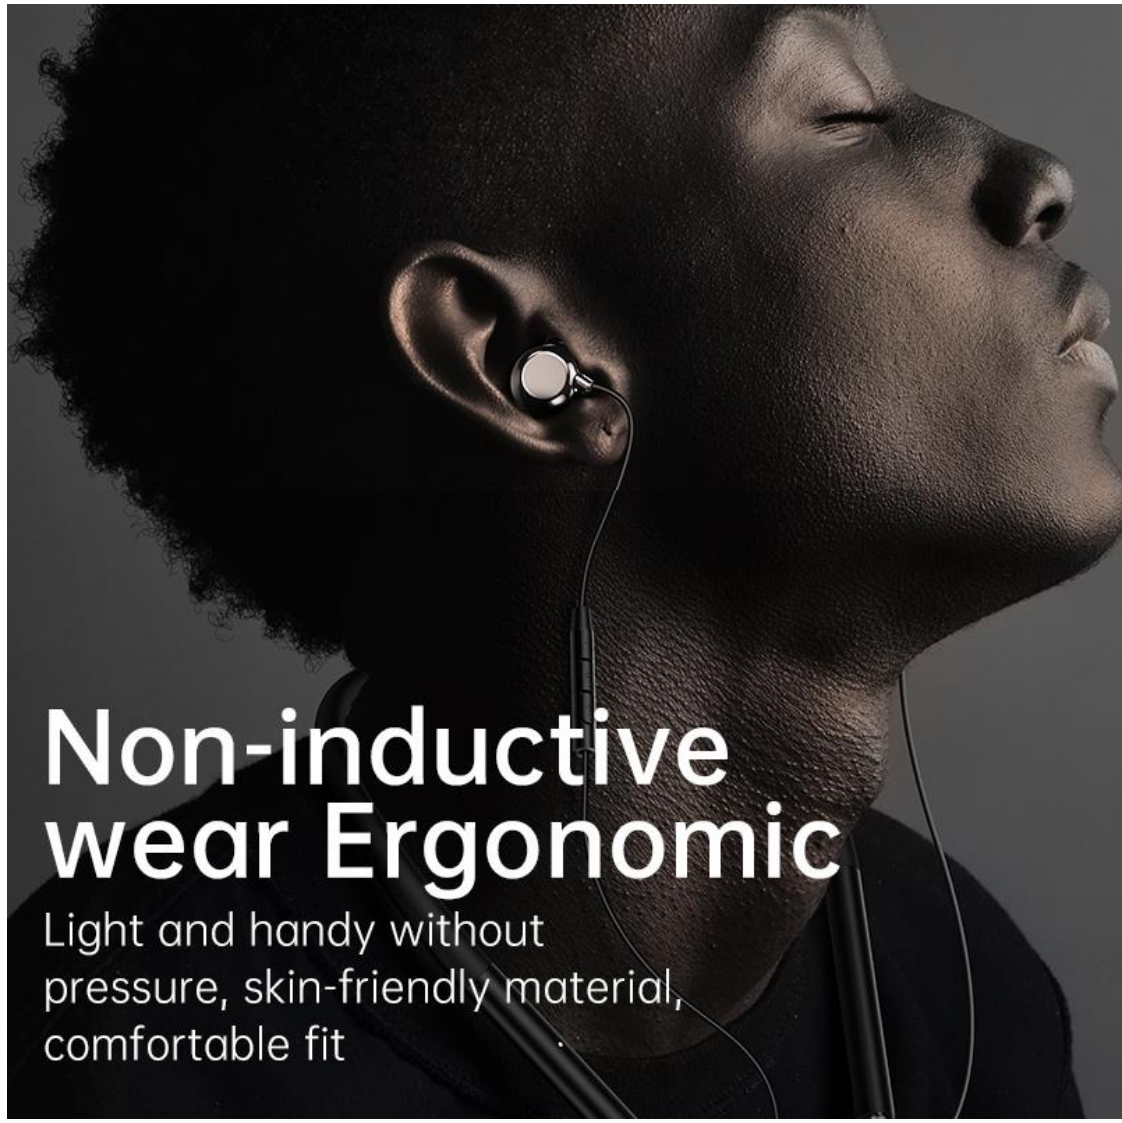

choetech

CHOETECH 400mAh Wireless ANC Stereo Headphone





Product Parameters:

Model	BH-T04
Bluetooth version	BT5.0
Interface	Type-c
Earbuds Charging time	2h
Audio frequency Range	20Hz--20KHz
Standby time	168Hours
Sensitivity	100+/-3DB at 1KHz
Active cancellation	Up to 22-25dB at 1KHz
Earbuds Battery	400mAh

3D Sound | BT5.0 bluetooth | Low power consumption

choetech **Best Seller**

CHOETECH Waterproof IP8X 5.2 bluetooth TWS





Product Parameters:

Model:BH-T06
Chipset:Jieli AD6973D4 V5.2
BT Distance:>10m
Driver Size:8.2mm
Frequency:2.402GHz-2.480GHz
Impedance:16Ω
Sensitivity:-80dB~-90dB
Battery Capacity:40mAh*2+300mAh
Talking Time:>4h
Playing Time:>6h
Charging Time:1.5h

HiFI Sound | IPX5 Water Resistance | Smart Touch Control

choetech **Best Seller**


CHOETECH Translucent V5.0 True Wireless Earbuds



Product Parameters:

Model: BH-T08
Bluetooth chip: Jerry AC6973D4
Bluetooth version: V5.1
Support decoding protocol: HFP A2DP HSP AVRCP
Standby time: about 30H
Talk time: about 3.5H
Music playback time: about 4H
Charging time: about 2H
Headphone battery capacity: 25mAh
Charging box battery capacity: 250mAh
Speaker size: 13mm
Speaker Impedance: 16Ω

HiFI Sound | IPX5 Water Resistance | Smart Touch Control

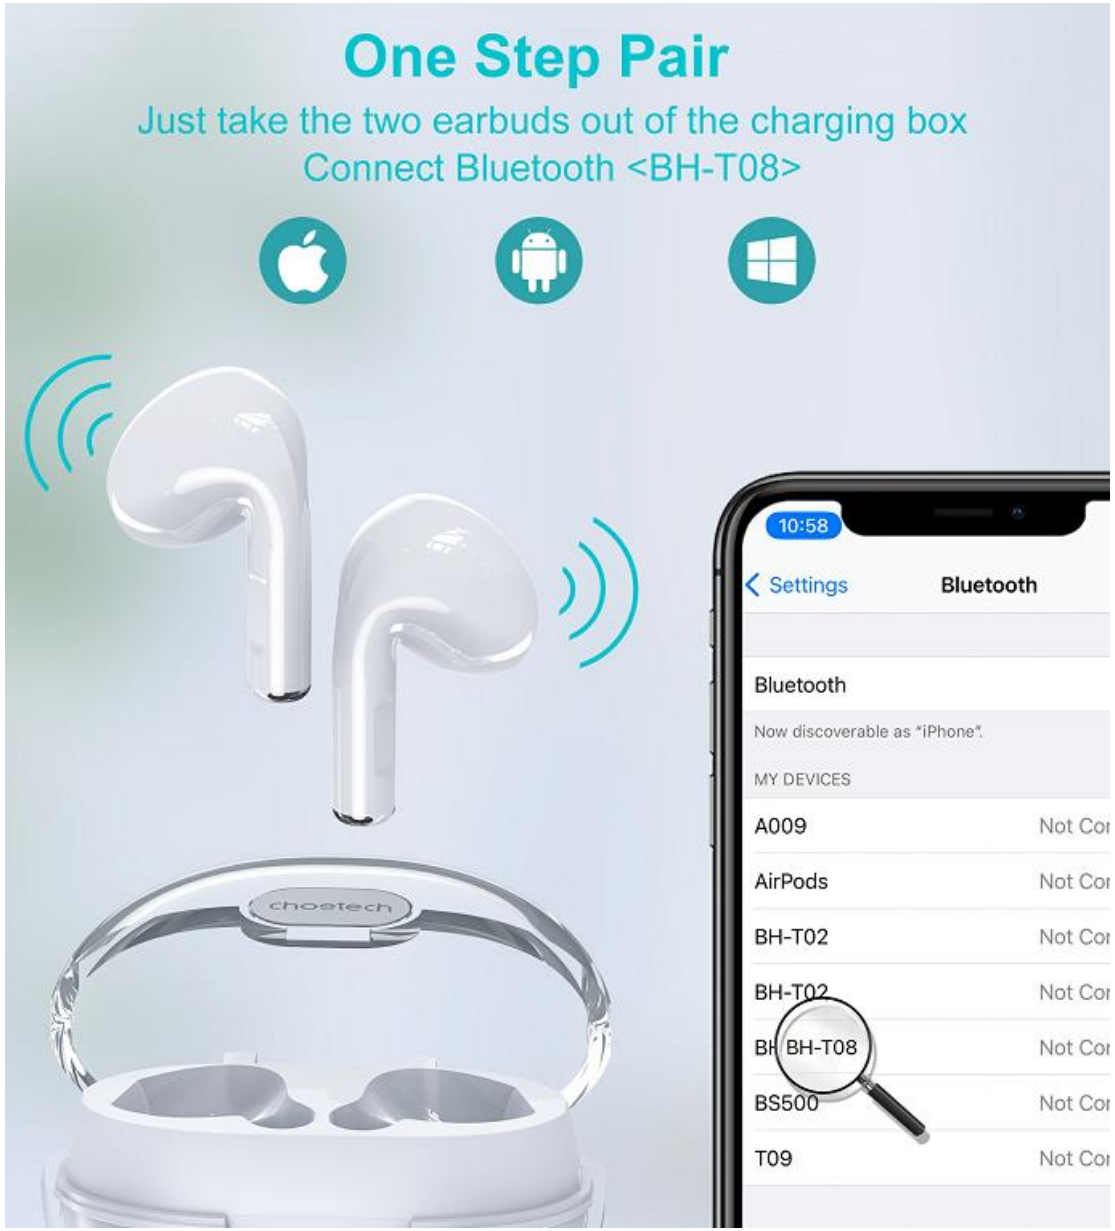

choetech

Solar TWS sports waterproof with 300mAh powerbank





Product Parameters:


Model: BH-T09
Bluetooth version: V5.0 AIROHA
Bluetooth operating frequency: 2.402GHz-2.480GHz
Receiving distance: ≤15 m
Audio S/N:≥95dB
Battery: Lithium battery 3.7V/ 40mAh
Microphone: digital silicon microphone 38dB
Charging time: earbuds 1.5H，charging case about 2H
Talking/playing time: about 4-5 hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: A2DP、AVRCP、SPPP、HFP、HSP

Solar charging TWS | 300mAh powerbank | Hifi sound

choetech **Best Seller**

Choetech ENC+ANC TWS earphone



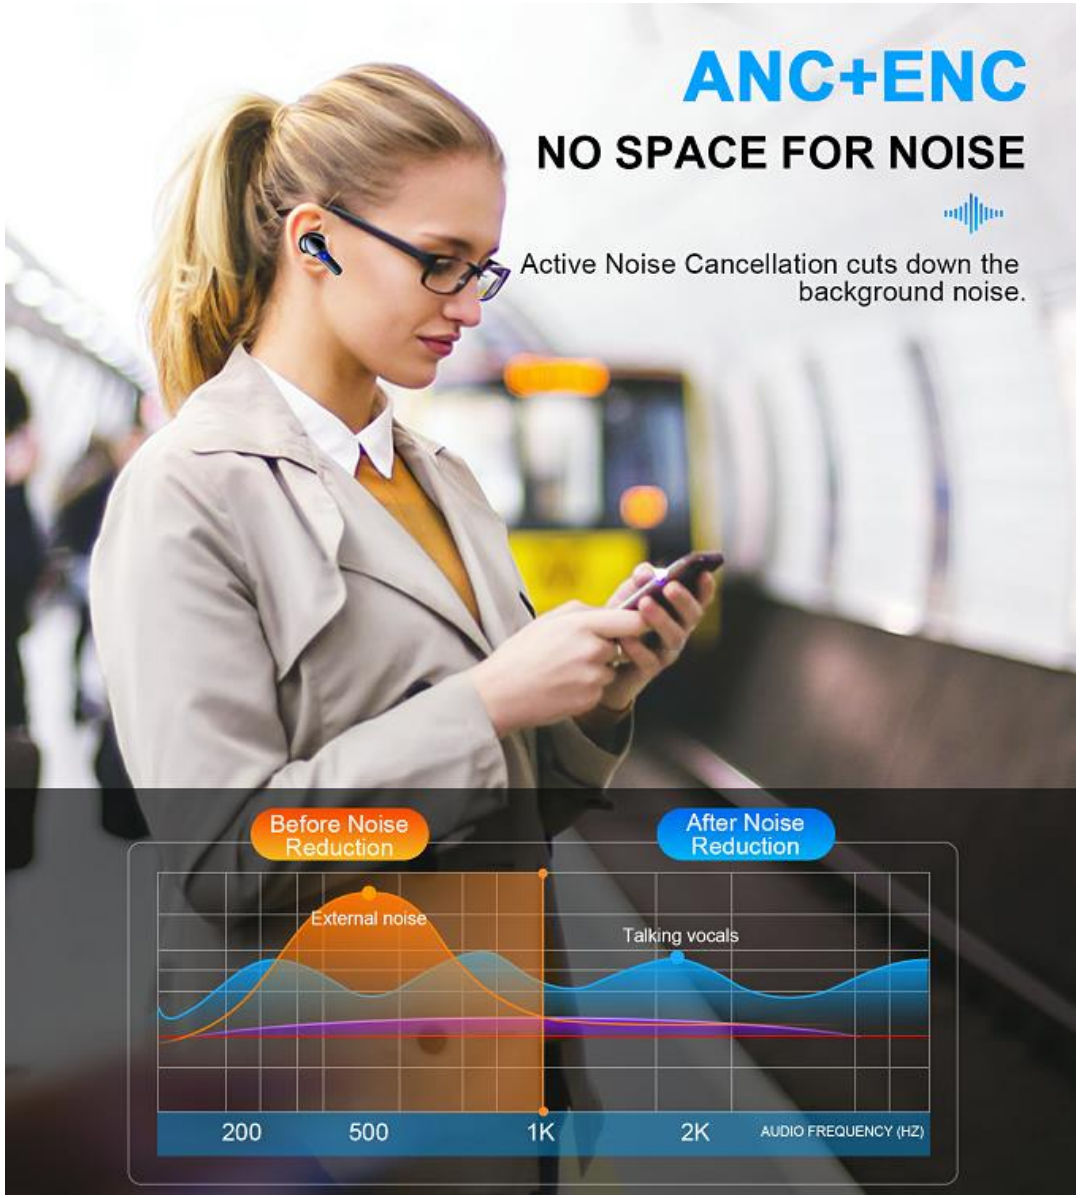

Product Parameters:

Model: BH-T10
Bluetooth version: V5.3
Bluetooth operating frequency: 2.402GHz-2.480GHz
Modulation technique: bluetooth GFSK
Maximum EiRP: bluetooth 7.2dBm; BLE 7.19dBm
Earbuds battery capacity: 40mAh
Charging case battery capacity: 400mAh
Receiving distance: ≤10 m
Call time: about 5Hours
Music time: ANC off about 10hours, ANC on about 7hours
Stanby time: about 72hours (connect the phone without music, ANC off)
Charging time: earbuds 1.2H, charging case about 1.5H
Supporting protocol: A2DP、AVRCP、HFP、HSP

ANC+ENC | Low noise | Hifi sound

choetech **New Arrival**

Choetech IPX4 hifi sound bone clip tws earphone



Product Parameters:

Model: BH-T12
Bluetooth version: V5.0 AIROHA
Bluetooth operating frequency: 2.402GHz-2.480GHz
Receiving distance: ≤15 m
Interface: type-c
Earphone Battery: Lithium battery 110mAh
Case battery: 600mAh
Microphone: digital silicon microphone 38dB
Charging time: earbuds 1.5H, charging case about 1.5H
Talking/playing time: about 6hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: A2DP、AVRCP、SPPP、HFP、HSP

bone clip | low noise | IPX4 waterproof

choetech **New Arrival**

Choetech ANC TWS earphone









Product Parameters:

Model: BH-T13
Bluetooth version: V5.0 AIROHA
Bluetooth operating frequency: 2.402GHz-2.480GHz
Receiving distance: ≤15 m
Interface: type-c
Battery: Lithium battery 3.7V/ 40mAh
Microphone: digital silicon microphone 38dB
Charging time: earbuds 1.5H，charging case about 1H
Talking/playing time: about 6hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: A2DP、AVRCP、SPPP、HFP、HSP

ANC | low noise | IPX8 waterproof

choetech **New Arrival**

Choetech ENC+ANC TWS





Product Parameters:

Model: BH-T15
Bluetooth version: V5.2
Bluetooth solution: BT8922E2
Bluetooth operating frequency: 2.402GHz-2.480GHz
Bluetooth rated voltage: 3.3-4.2V
Receiving distance: ≤10 m
Interface: type-c
Earphone Battery: Lithium battery 50mAh
Case battery: 380mAh
Depth of noise reduction: 35-40dB
Charging time: earbuds 1.5H, charging case about 1.5H
Talking/playing time: about 6hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: A2DP、AVRCP、SPPP、HFP、HSP

bean earphones | low noise | ENC+ANC function

choetech **New Arrival**

Choetech bean TWS



Product Parameters:

Model: BH-T16
Bluetooth version: V5.2
Bluetooth operating frequency: 2.402GHz-2.480GHz
Bluetooth rated voltage: 3.3-4.2V
Receiving distance: ≤10 m
Interface: type-c
Earphone Battery: Lithium battery 50mAh
Earphone case size: 27*20*5.5mm
Case battery: 380mAh
Depth of noise reduction: 35-40dB
Charging time: earbuds 1.5H, charging case about 1.5H
Talking/playing time: about 6hours (the actual use time depends on the type of song and volume requirements)
Supporting protocol: HSP,HFP,A2DP,AVRCP

bean earphones | low noise | ANC function

choetech





Accessories





choetech

MFM iPhone 13 Series(Made for Magsafe）





Product Parameters:

Material : Mixed-color PC+TPU magnetic protective case
Type: All-inclusive anti-drop shell
Available colors: black/white/green/girl pink/vibrant yellow/blue
Process: Double injection
Applicable models: iPhone13 mini, iPhone13/ 13 Pro, iPhone13 pro max

Made for MagSafe

choetech

Adjustable Phone Desktop Holder





Product Parameters:

Model	H035
Product Name	Adjustable Phone Desktop Holder
Color	Sliver
Compatible with	Phone; Tablet
Material	Aluminium Alloy; Silicone
Suitable Size	4-10 inches mobile phone/tablets

Adjustable Design | Universal Compatible: | Stable Design

choetech

Magnetic Cell Phone Stand



Product Parameters:


Model	H048
Material	PC+ABS+Silicone+Stainless Steel
Colors	Black/White
Product Size	180-230mm (Height), 115mm (Bottom Diameter)
G.W.	0.64g
Style	Modern
Compatible Devices	Compatible with iPhone 12 / 12 Pro / 12 Pro Max / 11 / 11 Pro /11 Pro Max /XS/ XS Max / X / 8 / 7 / 6 / 5 / SE, Samsung Galaxy Note 10 / Note 10+ / S10 / S10+ / S10e / S9 / S9+ / S8 / S8+ / Note 8, HTC and other cellphones and Kindle device.
Certifications	FCC, CE, UKCA, RoHS, round PSE
Packing List	1 x Magnet Phone Stand; 1 x User Manual ; 12 x Warranty & Life-Long Time Service

Adjustable Design | Magnetic Function | Wide Compatible



choetech

Foldable Phone & Tablet Desktop Holder

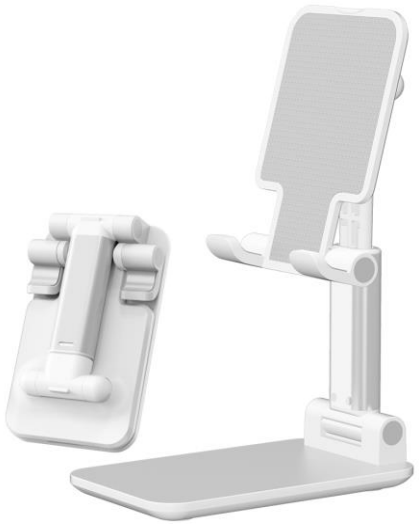

Product Parameters:

Model	H88
Product Name	Adjustable Phone Desktop Holder
Color	Pink/White
Compatible with	4-10 inches mobile phone/tablets
Material	Aluminium Alloy; Silicone; ABS
Application	Dining table, living room, home, office, travel, etc.

Adjustable Design | Wide Compatible | Foldable Stand



choetech

Removable Wireless Holder for Original Magsafe Charger for iPhone12/13/14/15 Series



Product Parameters:

Model	H046
Color	silver white
material	Aluminum alloy + silicone
size	129.4*75.7*74.6mm
Net Weight	110g

Aluminium-alloy material | For Apple Original Magsafe charger | Silicone antislip



choetech **Best Seller**

CHOETECH Magnetic holder for Iphone 12,13, 14, 15 series and Iwatch





Product Parameters:

Model	H050
Material	Silicone
Colors	Black/White/pink/blue
Certifications	ETL, RCM, FCC, CE, RoHS
Packing list	1* CHOETECH Magnetic holder, 1*User manual,1*warranty card

2-in-1 design for Iphone and Iwatch | various color choice | Soft silicone material

choetech **Best Seller**

CHOETECH 2-in-1 Magnetic wallet card for new Iphone12,13,14,15



Product Parameters:

Model	PC0003
Material	Magnet + PU
Available Color	Green / dark green / yellow
Certifications	CE, RoHS



Strongly Stickiness | for Iphone 12,13,14 | Stand design

choetech

CHOETECH Magnetic plate



Product Parameters:

Model	PC0213
Material	Magnet + PC
Available Color	Black / white
Certifications	CE, RoHS
Accessories	Magnetic plate, Guide manual

Strongly Stickiness | for Iphone 12,13,14 | Ultra-thin



choetech

CHOETECH Foldable Laptop Stand



Product Parameters:

Model H045
Material: silicone pad+ aluminium stand
Dimension: 156*240*55mm
Compatible size: 11 to 15.6 inch tablet
Adjustable height: 55-120mm
Net weight: 240g
Gross weight: 310g
Color: black, silver

Adjustable height | Foldable design | Stably stand



choetech

CHOETECH Foldable Laptop stand






Product Parameters:

Model H055
1.Material: silicone pad+ aluminium stand
2. Dimension: 220*210*136mm
3. Compatible size: 11 to 15.6 inch tablet
4. Adjustable height: 90-136mm
5. Net weight: 270g
6. Gross weight: 300g
7. Color: grey, silver

Adjustable 6different height | Foldable design | stably stand

choetech

CHOETECH 11inch Ipad pro magnetic holder

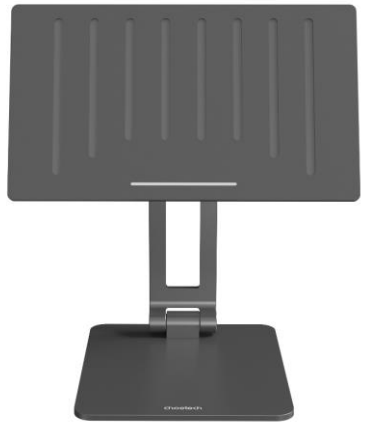

Product Parameters:

Model H068
Material:Aluminium +Slicone
Product size: 234mm length*132mm width *21-215mm height
NW: 673G
GW: 710G
Compatible 11inch ipad pro

Magnetic adsorption | 360degree rotation | Foldable design



choetech

CHOETECH 12.9inch Ipad pro magnetic holder



Product Parameters:

Model H069
Material:Aluminium +Slicone
Product size: 251mm length*156mm width *21-215mm height
NW: 811G
GW: 840G
Compatible 12.9inch ipad pro

Magnetic adsorption | 360degree rotation | Foldable design

Compatible Devices iPad Pro 12.9"



2018 3rd ☑A1876 ☑A2104 ☑A1895 ☑A1983



2020 4th ☑A2229 ☑A2069 ☑A2232 ☑A2233



2021 5th ☑A2378 ☑A2461 ☑A2379 ☑A2462



2022 6th ☑A2436 ☑A2766

choetech


Magnetic Holder for idle



Product Parameters:

Model	H049
Material	PC+ABS+Silicone+Stainless Steel
Colors	Black/White
Certifications	ETL, RCM, FCC, CE, RoHS
Packing list	1* CHOETECH Magnetic holder, 1*User manual,1*warranty card

Flexible Design | Wide compatibility | Effective charging

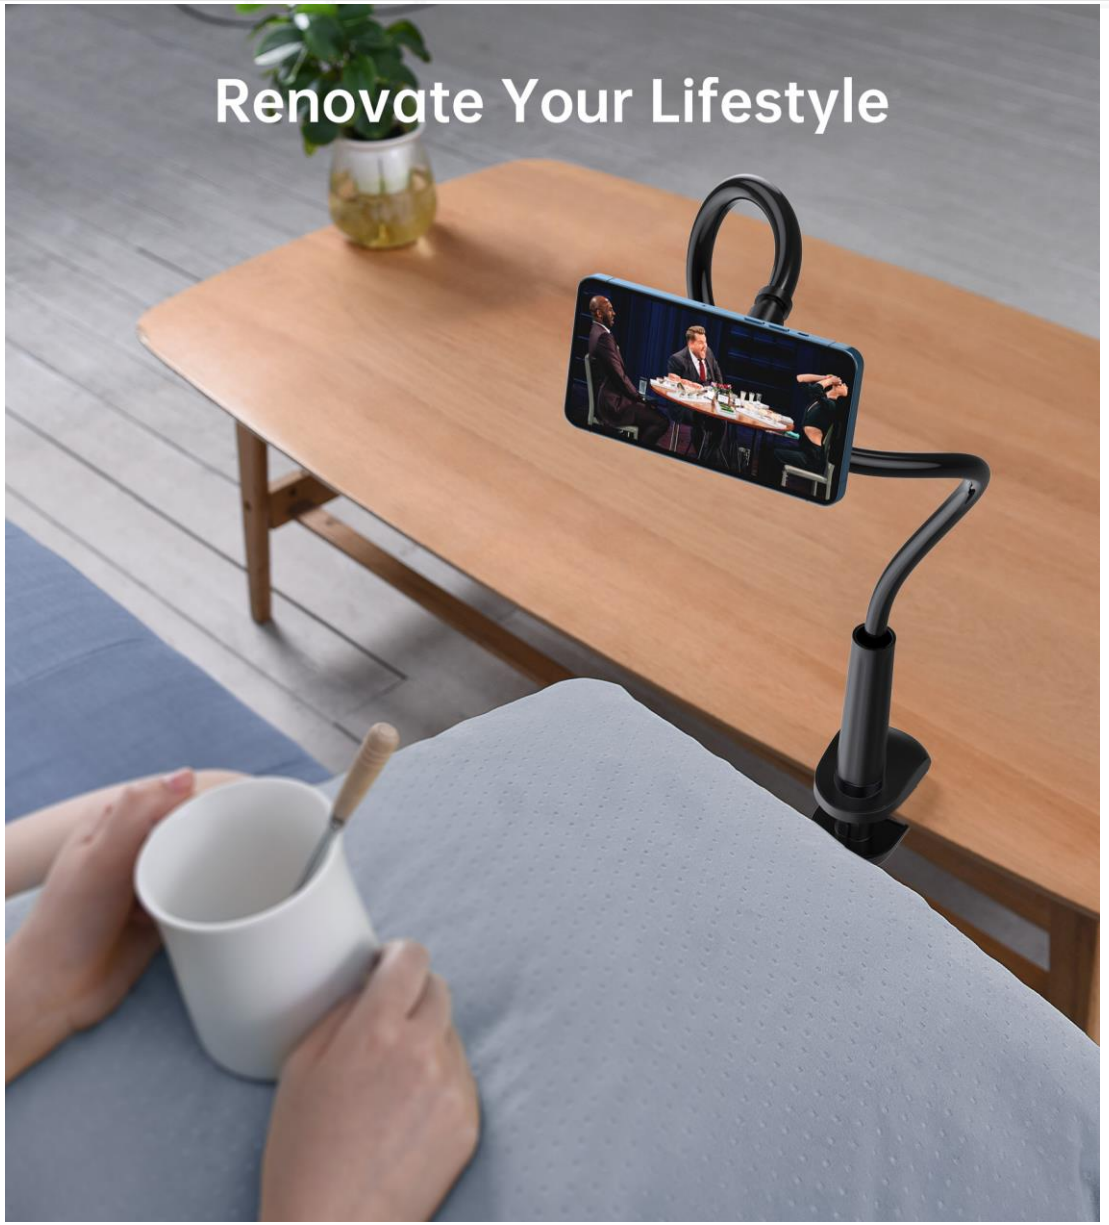

choetech


Magnetic Car Phone Mount



Product Parameters:

Model	H010
Material	ABS + PVC + Silicone + Aluminum Alloy + Metal
Color	Black
Fits for	Smartphones, GPS

Powerful Sucker | 360-rotation | Magnetic Car mount

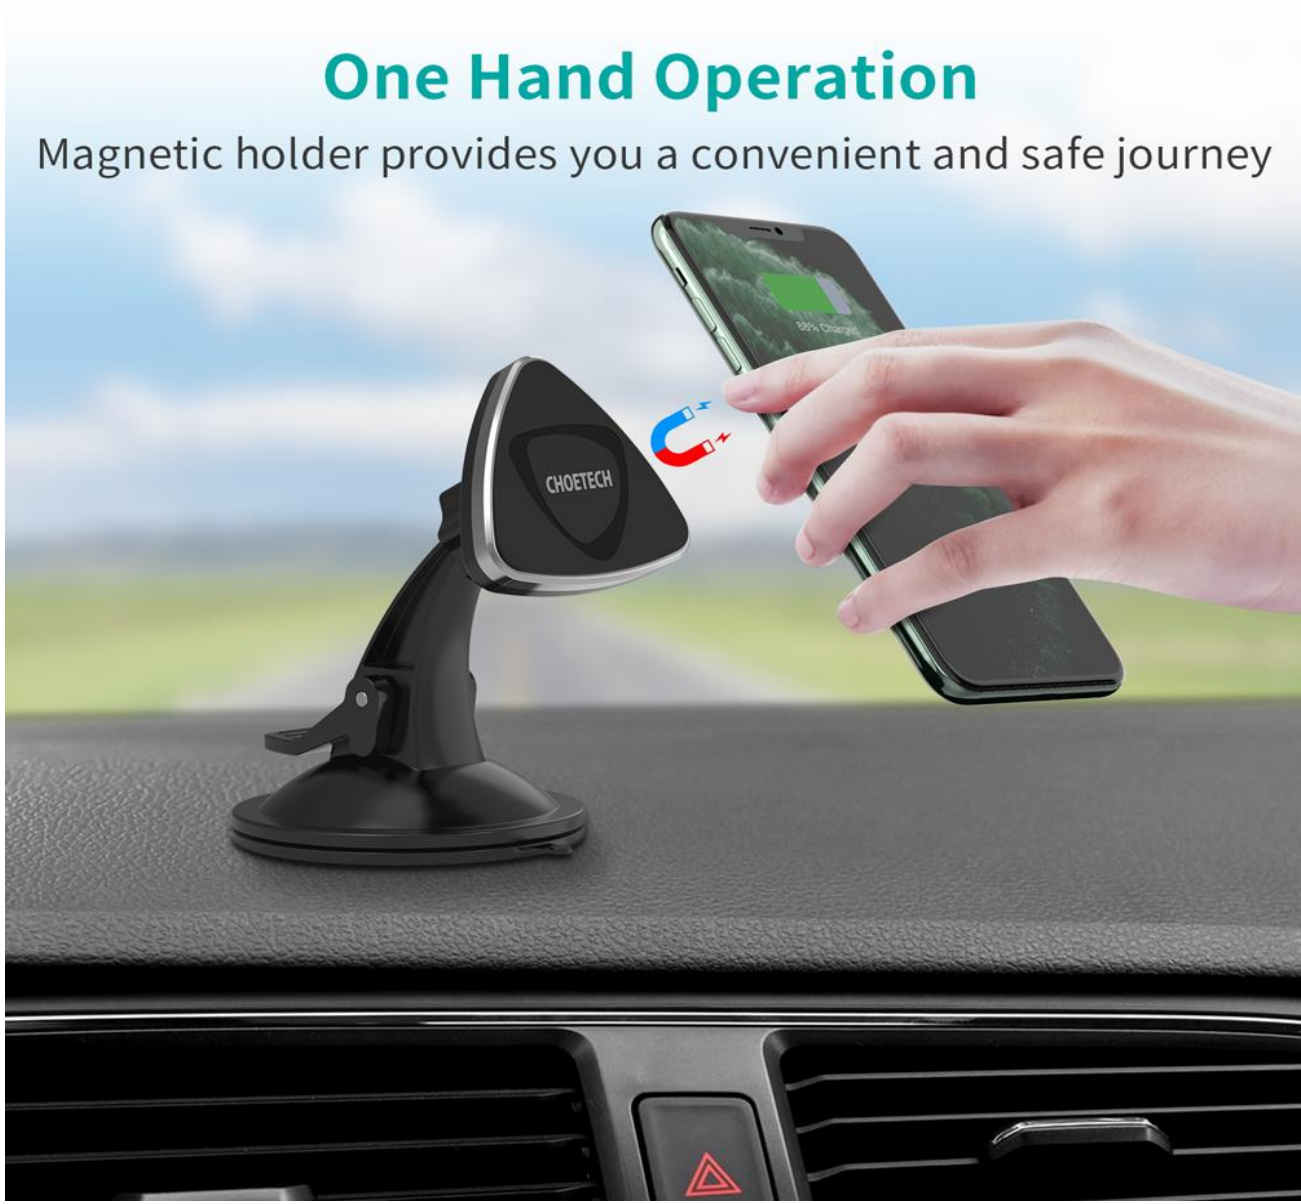

choetech **Best Seller**

CHOETECH Magsafe car mount for Iphone 12, 13, 14, 15 series



Product Parameters:

Model	AT0004-BK
Applicable device models	iPhone 12 ， 13 series
Material	ABS+PC+magnet+silicone
Certifications	CE, ETL, FCC, ROHS, DOE VI, CCC, PSE, SAA



Magnetic Car mount | For IPhone 12 ， 13Series | 360 Degree Adjustment

choetech

Magnetic Car Mount Stand for iphone12/13



Product Parameters:

Model: AT0005-BK iphone 12/13 series
Applicable device models Material: ABS+PC+magnet+silicone
Certifications: CE,ETL, FCC, ROHS, DOE VI, CCC, PSE,SAA
Magnetic head+ suction cup

Magnetic Car mount | For iPhone 12/13 Series | 360 Degree Adjustment



choetech

Magnetic Car Mount Stand for new Iphone





Product Parameters:

Model: H042
Material: ABS+silicone+magentic
Applicable device models Material: ABS+PC+magnet+silicone
Product dimension: 47*47*80(mm)
Weight: 75g
Certifications: CE,ETL, FCC, ROHS
Accessories: Magnetic head+ air vent clamp

Magnetic Car mount | For iPhone 12/13/14/15 Series | 360 Degree Adjustment

choetech

Universal Car Mount Stand



Product Parameters:

Model: H043
Material: ABS+silicone+magentic
Applicable device models Material: ABS+PC+magnet+silicone
Product dimension: 170*110*110mm
Weight: 175g
Certifications: CE,ETL, FCC, ROHS
Accessories: Holder+ suction cup
Chuck range: 58-90mm

Magnetic Car mount | Compatible 95% mobile size | 360 Degree Adjustment

choetech

Magnetic Car Mount Stand for iphone12/13/14/15



Product Parameters:

Model: H066
Applicable device models
Material: ABS+Silicone+Magnet
Certifications: CE,ETL, FCC, ROHS, DOE VI, CCC, PSE,SAA
Magnetic head+ suction cup

1. Large splint design, high glossy surface in the middle, business temperament, built-in silicone, better protection of mobile phones

2. The splint adopts a gear-type clamping mute design, one-handed operation, convenient

3. Knob-type locking air outlet base, super stable

4. Neat and compact, installed at the air outlet without blocking the line of sight



choetech **Best Seller**


Choetech Bicycle adjustable Stand for mobile



Product Parameters:

Model: H067
Material: ABS+Silicone
Certifications: CE, ROHS,
Compatible devices: 4-7inch mobile

design for 4-7inch mobile | 360degree rotation | stably stand

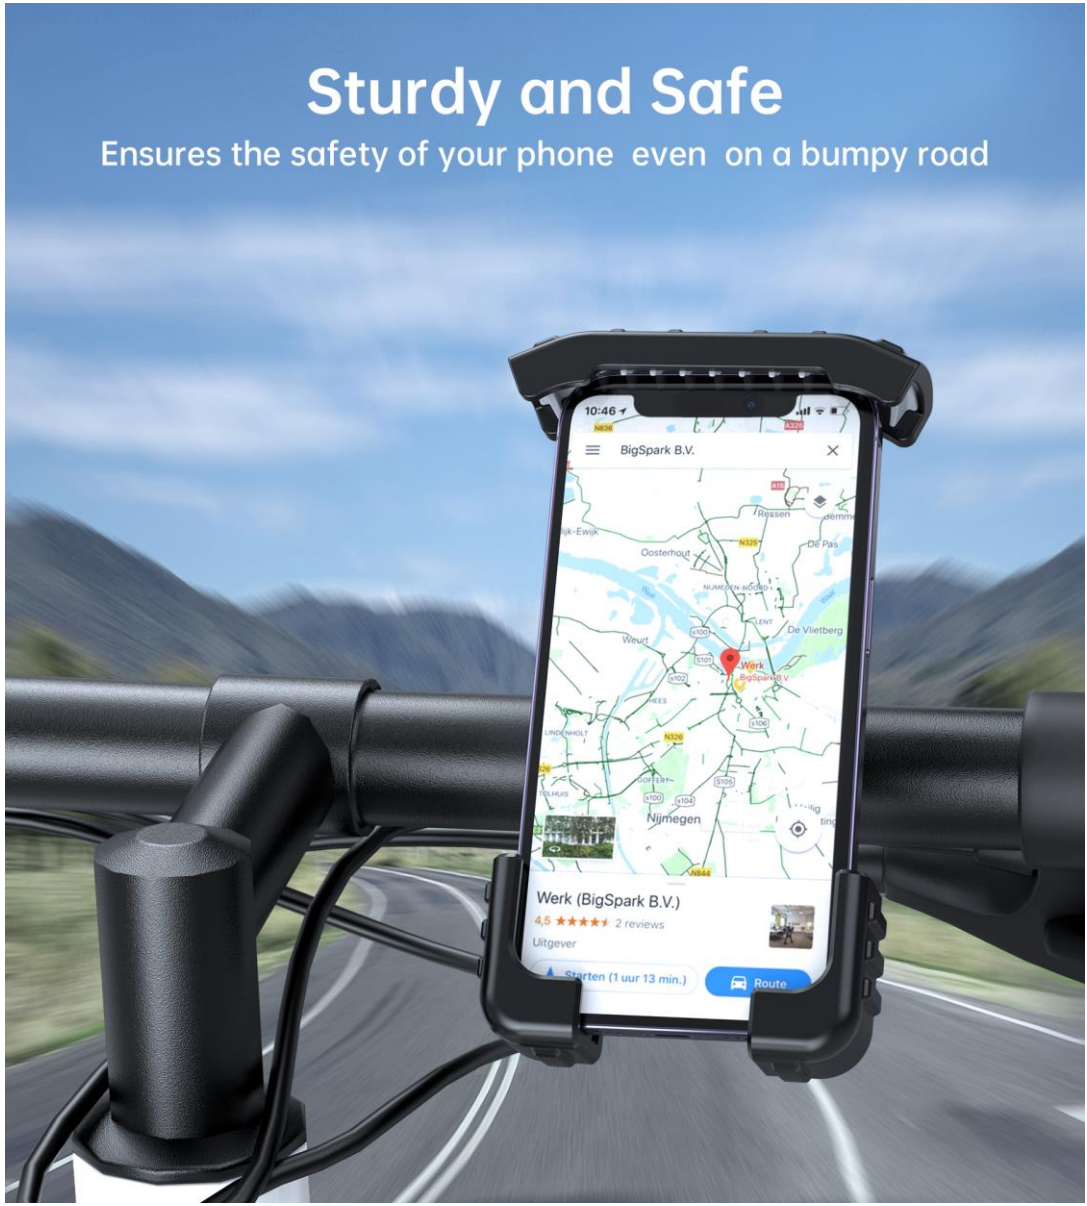

choetech

Choetech Magnetic Metal Plate for tech life





Product Parameters:

Model	H053
Material	Magnet + Metal
Available Color	Black / White
Certifications	CE, RoHS

Strongly Stickiness | Magnetic phone holder | Ultra-thin

choetech

CHOETECH Laptop desktop holder



Product Parameters:

Model H061
Material:Aluminium +Slicone
Product size: 270*220*50mm
NW: 650G
GW: 720G
carton size:36*52*52CM
Compatible 7-13inch laptop/tablet

Adjust height | | stably stand



choetech

CHOETECH Foldable mobile/tablet holder



Product Parameters:

Model H064
Material:Aluminium +Slicone
Product size: 139*80.9*5
NW: 150G
GW: 175G
carton size:36*52*52CM
Compatible mobile and tablets

Foldable design | adjust height | stably stand



choetech

Magnetic Metal Plate



Product Parameters:

Model	PC0093
Material	Magnet + PU
Available Color	Black / dark green / midnight blue
Certifications	CE, RoHS

Strongly Stickiness | Wireless Receiver | Ultra-thin



choetech

Universal Water-proof Bag



Product Parameters:

Model No.	WPC007
Material	Lightweight PVC
Compatible	≤6 inches smartphone
Color	black/white/pink/blue

IPX8 Certified | Screen-touch Functionality | Clip Design



choetech

Universal Water-proof Bag



Product Parameters:

Model No.	WPC035
Material	Lightweight TPU
Compatible	≤6 inches smartphone
Color	black/white

IPX8 Certified | Screen-touch Functionality | Clip Design

Floating Waterproof Case


Smooth buoyant TPU designed, no more worry about your phone sinking to the bottom of the water(The maximum floating mass ups to 200g)



choetech

iPad Pro 12.9" Wireless Keyboard Case



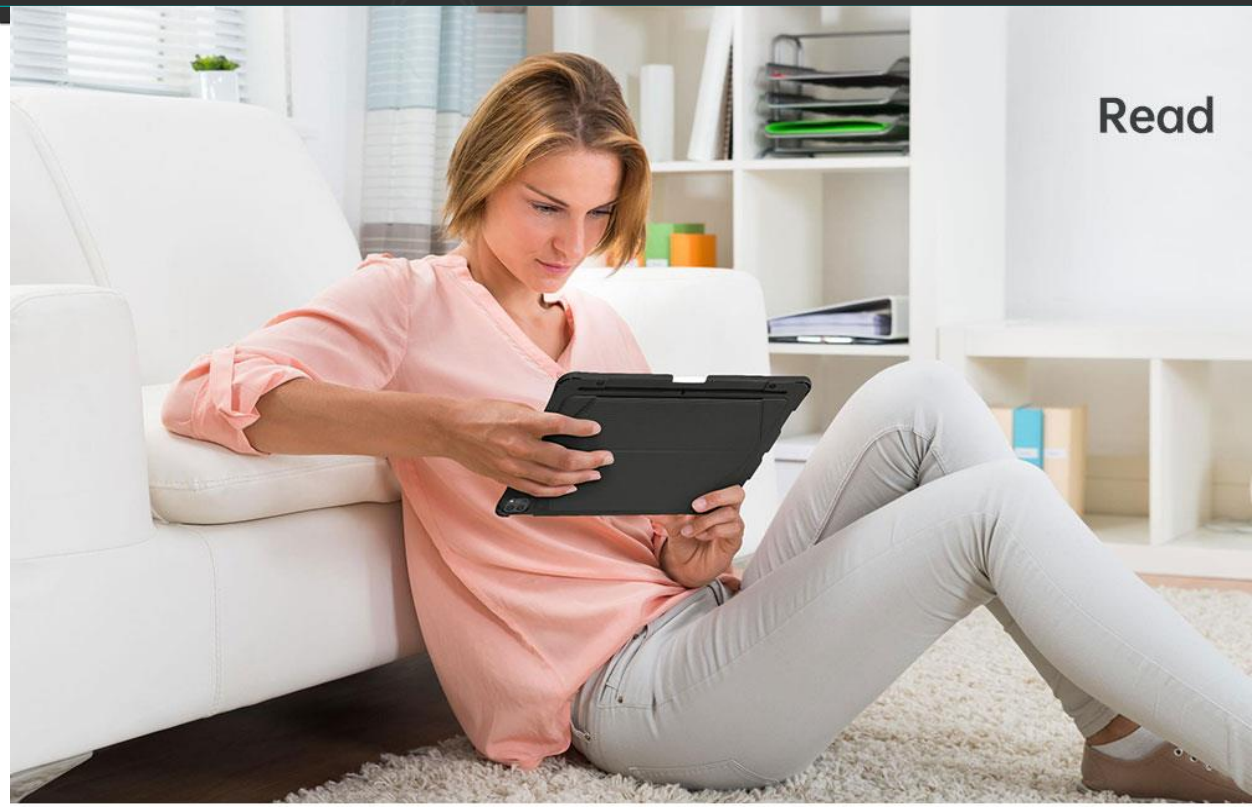

Product Parameters:

Model	BH-010
Interface	Micro USB
Material	Metal hook + PU + ABS
Input	5V
Compatible Device	iPad Pro 12.9
Product Size	284*230*18mm
Net Weight	510g
Certification	CE, FCC, RoHs





Full Protection | Holder For Apple Pencil | Stand Function

choetech

iPad Pro 11" Wireless Keyboard Case



Detachable Wireless Keyboard



Product Parameters:

Model	BH-011
Interface	Mirco USB
Material	Metal hook + PU + ABS
Input	5V
Compatible Device	iPad Pro 11"
Product Size	250*185*18mm
Net Weight	420g
Certification	CE, FCC, RoHs

Full Protection | Holder For Apple Pencil | Stand Function

Built-in rechargeable battery

Raised edges to protect tablet screen

Fast, fluid typing keys

choetech

CHOETECH iPad Pro 11" Wireless Keyboard Case





Product Parameters:

Model	BH-012
Interface	Type-C
Material	Metal hook + PU + ABS
Input	5V
Compatible Device	iPad Pro 11"
Product Size	251.2*192.2*10.5mm
Net Weight	559g
Certification	CE, FCC, RoHs

Full Protection | Holder For Apple Pencil | Stand Function

choetech

CHOETECH iPad 10.2" Wireless Keyboard Case with intelligent control



Product Parameters:

Model	BH-013
Interface	Type-C
Material	Metal hook + PU + ABS
Input	5V
Compatible Device	iPad 10.2"
Product Size	251.2*192.2*10.5mm
Net Weight	559g
Certification	CE, FCC, RoHs

Full Protection | Holder For Apple Pencil | Stand Function



choetech

CHOETECH iPad Pro 12.9" Wireless Keyboard Case






Product Parameters:

Model* BH-015
Interface* TYPE-C
Material* Leather case PU+Keyboard ABS
Input* 5V-2.1A
Colour: Black
Support ipad Pro 12.9 inches
Approvals* FCC, CE, RoHS
Packing List* 1 x Bluetooth Keyboard Holster; 1 x Keyboard Charging Cable; 1 x Instruction Manual;
Indicator status* After power on, press and hold Fn+C for 3 seconds to enter Bluetooth pairing mode

Full Protection | Holder For Apple Pencil | Stand Function

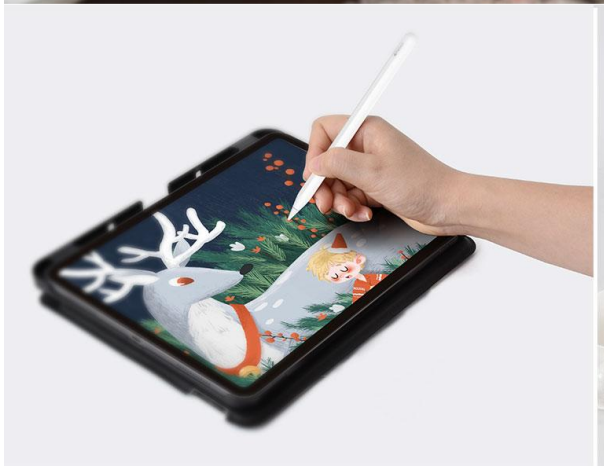



choetech

CHOETECH iPad 10.9" Magic Wireless Keyboard Case





Product Parameters:

Model	BH-017
Interface	Type-C
Material	Metal hook + PU + ABS
Input	5V,500mA
Battery	700mA
Compatible Device	iPad 10.9inch (ipad 10)
Net Weight	430g
Certification	CE, FCC, RoHs
Version	EN, Arab version

magic control | Detachable keyboard | Stand Function

choetech

CHOETECH iPad Pro 11" Magic Wireless Keyboard Case






Product Parameters:

Model	BH-018
Interface	Type-C
Material	Metal hook + PU + ABS
Input	5V,500mA
Battery	700mA
Compatible Device	iPad pro 11inch (ipad pro 2018-2022 11inch)
Net Weight	430g
Certification	CE, FCC, RoHs

touch pad | Detachable keyboard | Stand Function

choetech

CHOETECH 104 Key light-emitting game keyboard

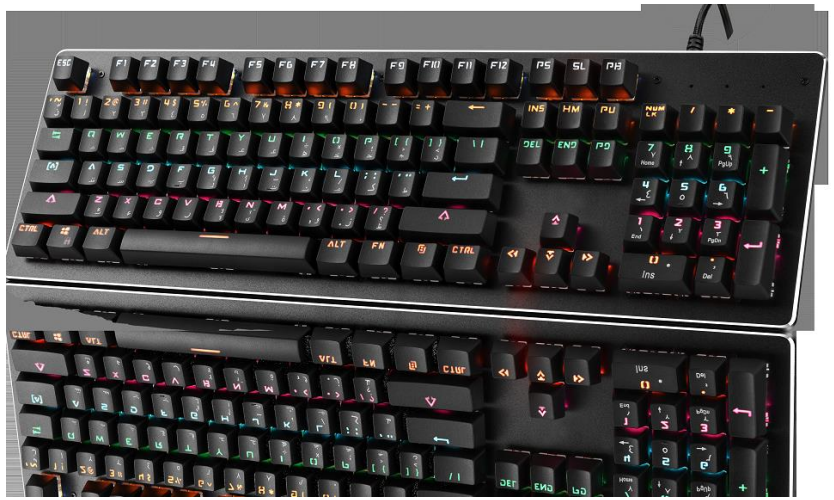



Product Parameters:

Model Name: GM-W03
Material: 1.5mm aluminum alloy cover+all copper belt magnetic ring braided wire;
Lighting mode: Single mixed color luminescence + a variety of lighting modes
Mechanical green shaft;
Full KEY non-conflict game chip;
ABS double color injection key cap

104 key light-emitting | aliminum alloy cover | Stand Function

choetech

CHOETECH 4G wiress keyboard and mouse






Product Parameters:

Model GM-W04
4D 2.4G Wireless Mouse
Product size: 104.5*66*38.7 mm
Net weight: 57.05 g
Resolution: 800-1200-1600 DPI
Color: Black
Interface: USB Receiver, Plug and Play
Material: HIPS
Working Range: 10 meters

wireless connect | 4G internet | 104 keys + 8 hot keys

choetech

Stylus Pen for ipad

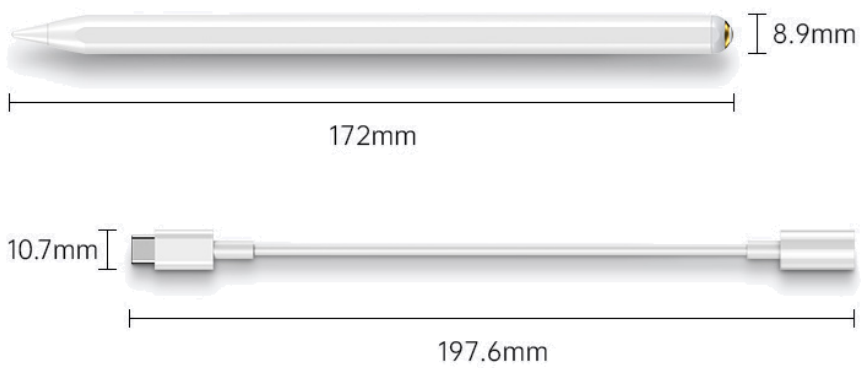


Product Parameters:

1) Charging way: magnetic wireless charging
2) Input current: 10mA
3) Chaging time: 1Hour
4) The standby time: 30days
5) Material: ABS
6) Colors: White
7) Size: 16.5CM*0.89CM
8) Packing list :1* CHOETECH Stylus Pen, 1*User manual,1*warranty card
9) Battery capacity :80mAh,
10) Working Current:10mAh
11) Standby Current: 15uA
12) Charging Current 100mAh 8hours of continuous writing

Magnetic Adsorption | Superior Universal | Wide Compatible



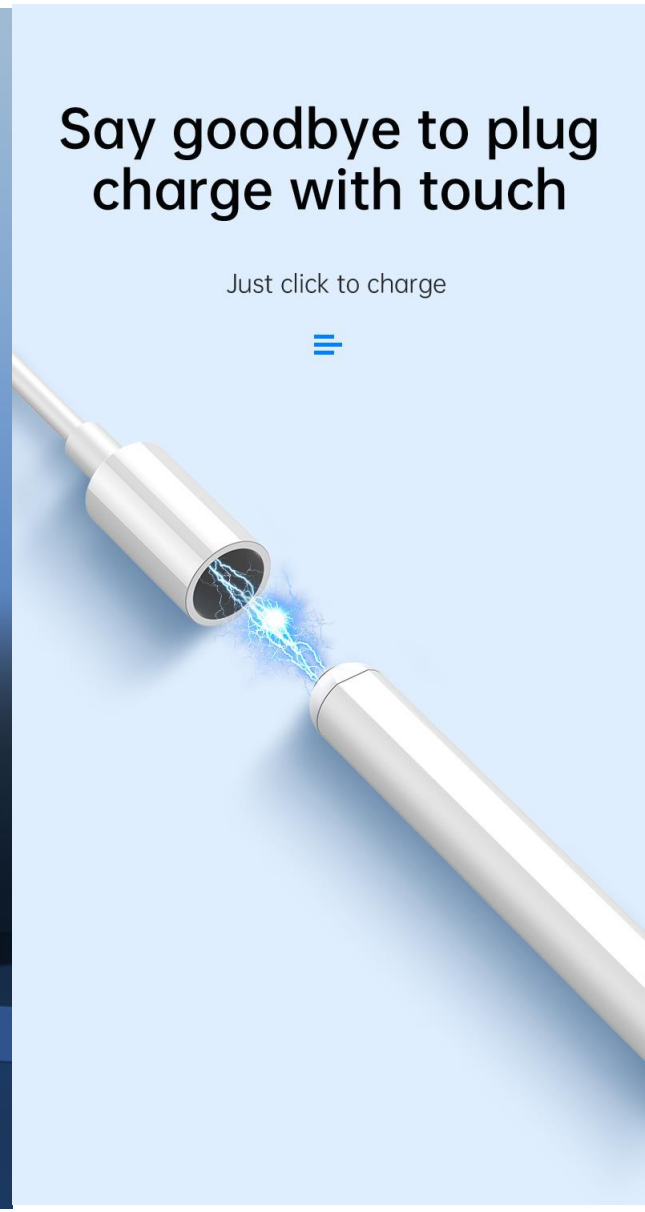

choetech

iPad case (11 inch, 12.9 inch, 10.2 inch)



Product Parameters:

Model	PC0130/PC0131/PC0132
Material	PC+ABS
Colors	Black/Green
Type	11 inch/12.9 inch/10.2 inch
Packing list	1* CHOETECH ipad case, 1*User manual,1*warranty card

Full Protection | Holder For Apple Pencil | Wide Compatible

choetech

CHOETECH phone case for Iphone 14 series





Product Parameters:

Model	PC0115/PC0116/PC0117/PC0118
Material	PC+TPU
Available Color	Black/White/Pink/Red/Ocean Blue/Sky Blue/Purple
Compatibility	iPhone14
Certifications	CE, RoHS

SKU	PC0115	PC0116	PC0117	PC0118
Description	iPhone14 PC+TPU phone case, 6.1 inch	iPhone14 PLUS PC+TPU phone case, 6.1 inch	iPhone14 PRO PC+TPU phone case, 6.7 inch	iPhone14 pro max PC+TPU phone case, 6.7 inch

magnetic phone case | Full Protection | Design For IPhone 14 Series

choetech

CHOETECH phone case for Iphone 14 series



Product Parameters:

Model	PC0119/PC0120/PC0121/PC0122
Material	PC+TPU
Available Color	Transparent
Compatibility	iPhone14
Certifications	CE, RoHS

SKU	PC0119	PC0120	PC0121	PC0122
Description	iPhone14 PC+TPU phone case, 6.1 inch	iPhone14 PLUS PC+TPU phone case, 6.1 inch	iPhone14 PRO PC+TPU phone case, 6.7 inch	iPhone14 pro max PC+TPU phone case, 6.7 inch

magnetic phone case | Full Protection | Design For IPhone 14 Series



choetech

CHOETECH Magsafe Phone case for iPhone 15 series



Product Parameters:

Model	PC15801/ PC15802/ PC15803/ PC15804
Material	Silicone
Available Color	Black/White/Pink/Red/Classic Blue/Sky Blue/Green
Compatibility	iPhone15
Certifications	CE, RoHS

Magsafe phone case | Full Protection | Design For IPhone 15 Series

choetech

CHOETECH Magsafe Phone case for iPhone 15 series

Product Parameters:

Model	PC15805
Material	TPU+PC
Available Color	Clear
Compatibility	iPhone15
Certifications	CE, RoHS





Magsafe phone case | Full Protection | Design For IPhone 15 Series

CHOETECH Magsafe Phone case for iPhone 15 series







Product Parameters:

Model	PC1580XX
Material	TPU+PC
Design	Anti-edge half bag design
Available Color	Clear
Compatibility	iPhone15
Certifications	CE, RoHS

Magsafe phone case | Full Protection | Design For IPhone 15 Series

choetech

CHOETECH Magsafe Phone case with Holder for iPhone 15 series





Product Parameters:

Model	PC1580XX
Material	TPU+PC
Design	All inclusive
Available Color	Black, Silver
Compatibility	iPhone15
Certifications	CE, RoHS

Magsafe phone case | With Holder | Design For IPhone 15 Series

choetech

Choetech HD screen Magnetic smart watch



Product Parameters:

Model: WT001
Data transfer: BLE5.0
Battery capacity: 300mAh
Frequency /EIRP: 8dbm (max)
Charging voltage: 5V
Waterproof: IP67
Working Temperature: -5~45℃

Magnetic charging | **HD screen** | Mutiple sport modes



Choetech WiFi Solar Power Monitor



Model: ASC006

Main processor Ingenic-T31ZL Ingenic-T31ZX

Image Senor GC2063 GC4653

Compression H.264+/H.265

Internet Connection 4G TD-LTE,TD-LTE / LTE FDD TD-LTE / LTE-FDD

4G Version CN/ AU/ EU/ JP/ US/ ASEAN (Optional)

Alarm Detection Mode PIR Human detection + AI Human shape detection

Detection Distance 0~12M

Detect Angle 105°

Audio Built-in speaker (input) 3W

Built-in microphone (output) voice monitoring distance 20M

Lens Lens 2.8mm

Lens Angle 105°

Storage Cloud Storage Cloud storage, storage when alarm recording

Local Storage TF Card Max 128G

Power Power Supply Mode Solar Panel+ Build in Batteries

Panel Material monocrystalline silicon

Solar Energy Power 6W

Battery Capacity 3pcs 18650

SD card: 128GB

Dimension: 82*134*235mm

Weight: 290G



Choetech Binocular WiFi Solar Power Monitor



Model: ASC007

Main processor Ingenic-T40N Ingenic-T31ZX

Image Senor GC2063 GC4653

Compression H.264+/H.265

Internet Connection 4G TD-LTE,TD-LTE / LTE FDD TD-LTE / LTE-FDD

4G Version CN/ AU/ EU/ JP/ US/ ASEAN (Optional)

Alarm Detection Mode PIR Human detection + AI Human shape detection

Detection Distance 0~12M

Detect Angle 105°

Audio Built-in speaker (input) 3W

Built-in microphone (output) voice monitoring distance 20M

Lens Lens 2.8mm

Lens Angle 105°

Storage Cloud Storage Cloud storage, storage when alarm recording

Local Storage TF Card Max 128G

Power Power Supply Mode Solar Panel+ Build in Batteries

Panel Material monocrystalline silicon


Solar Energy Power 6W

Battery Capacity 3pcs 18650

SD card: 64GB

Dimension: 82*134*235mm

Weight: 300G

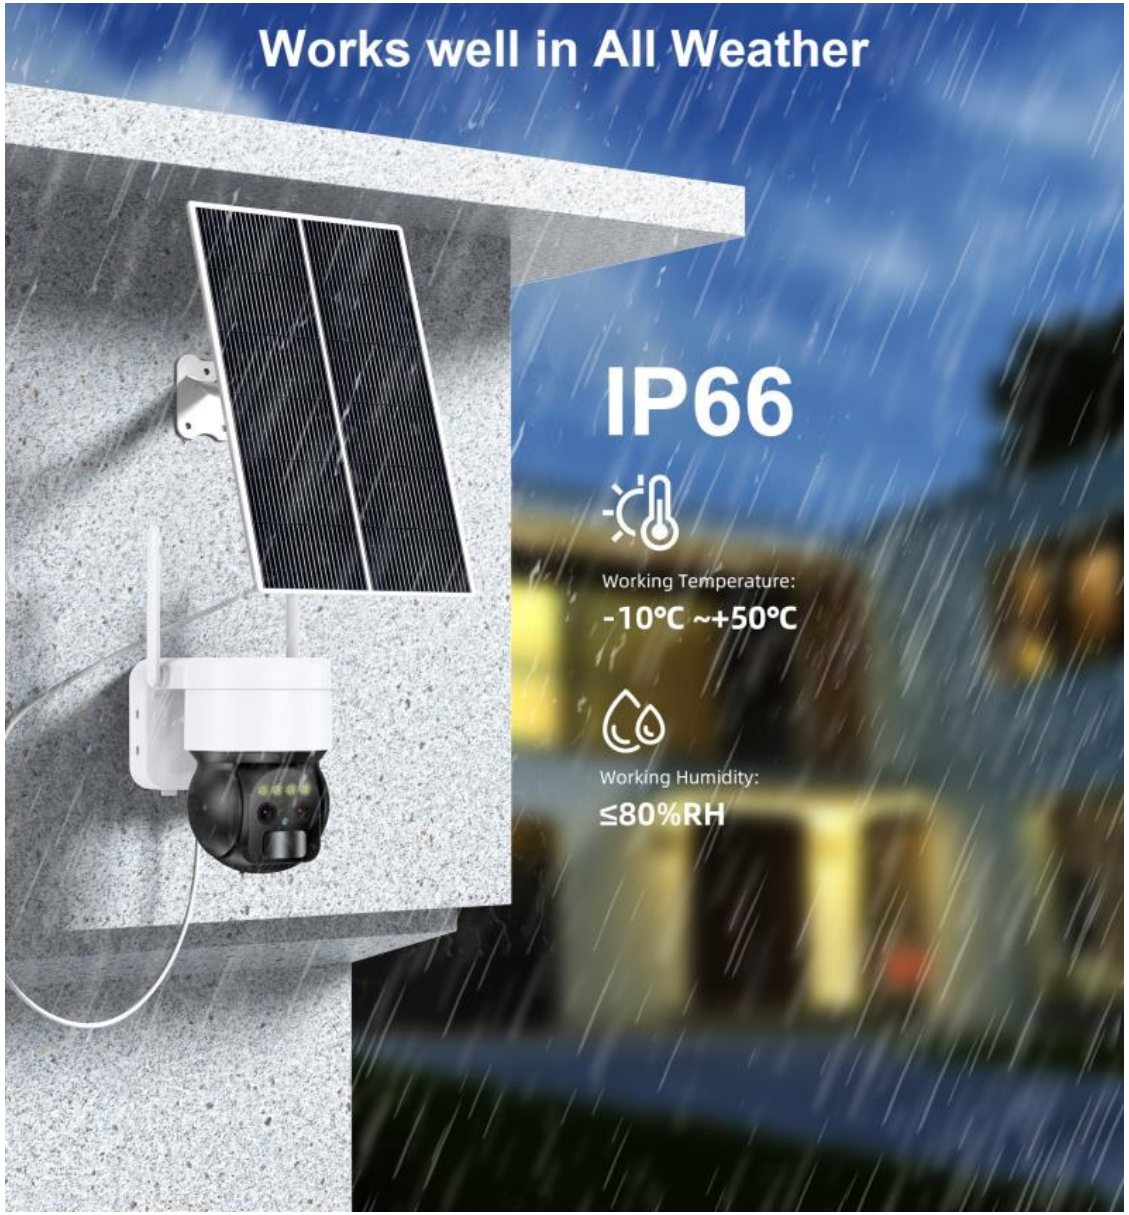

THANKS !